


The AB02 extrusion, with its sleek profile, is perfectly suited for spaces requiring subtle yet potent lighting. It employs a two-component system: a mounting piece for ceiling attachment and a main fixture that clicks into the mount, ensuring a flush fit with no visible screws, all in efficient anodized aluminum for excellent heat dissipation.

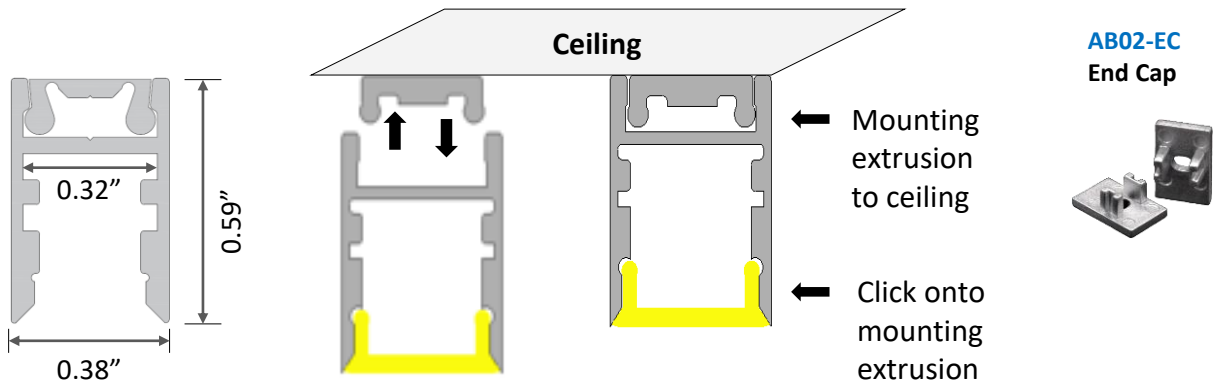

Product Detail

Material: Extruded Aluminum
 Color: Anodized Silver
 Dimension (in): L 78.74" x W 0.38" x H 0.59"
 Customization: Cut to specified length

Applications

- Narrow/Shallow
- Bathroom
- Wall
- Furniture
- Steps/Staircases
- Under Cabinet
- Cove
- Millwork
- Handrail
- Vanity
- Office

Compatible LED Tapelight

Product	Output (~lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (~lm/watt)	CRI	Voltage	Max Run Length	Cut Increment
L240	240	55	2.7	88	>90	24V	16'	1.5"

Ordering Code: AB02 + Tapelight + Accessories + Lengths

AB02	- SL	- LW-4	- L200	IP54	CT35	- EC	- 4'
Extrusion	Lens	Tapelight				End Cap	Length
AB02	CL – Clear Lens SL – Satined Lens	LW-4 – Tape Light	L240 ~240 lm/ft	IP54	CT27 2700K CT30 3000K CT35 3500K CT40 4000K	EC – End Cap	Enter run length

Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67									
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION							
NTR Non-Dimming		+	50	50 Watt	+	IP00	Indoor	88-264V	24V	3.90 x 3.82 x 1.42							
				75			75 Watt			5.08 x 3.82 x 1.50							
				100			100 Watt			6.26 x 3.82 x 1.50							
				150			150 Watt			7.84 x 3.85 x 1.50							
				200			200 Watt			8.46 x 4.53 x 1.18							
				320			320 Watt			8.46 x 4.53 x 1.18							
				750			750 Watt			9.84 x 5.00 x 1.61							
				960			960 Watt			11.60 x 5.00 x 1.61							
				12			12 Watt			+	IP42	Indoor	90-264V	24V	3.03 x 1.57 x 1.14		
				16			16 Watt								3.03 x 1.57 x 1.14		
				25			25 Watt								3.31 x 2.24 x 1.16		
				35			35 Watt								3.31 x 2.24 x 1.16		
		+	20	20 Watt	+	IP67	Outdoor	90-264V	24V	4.65 x 1.38 x 1.02							
				35						35 Watt	5.83 x 1.57 x 1.18						
				60						60 Watt	6.40 x 1.67 x 1.26						
				100						100 Watt	7.48 x 2.05 x 1.46						
				150						150 Watt	7.52 x 2.48 x 1.48						
				240						240 Watt	9.61 x 2.68 x 1.53						
				320						320 Watt	9.92 x 3.54 x 1.72						
DTR Dimming min 10% (0-10V)		+	16	16 Watt	+	IP30	Indoor	90-305V	24V	5.83 x 1.57 x 1.26							
				25						25 Watt	+	IP67	Outdoor	90-305V	24V	5.83 x 1.57 x 1.26	
				40						40 Watt						6.40 x 1.70 x 1.26	
				60						60 Watt	6.40 x 1.70 x 1.26						
				90						90 Watt	6.34 x 2.40 x 1.42						
				96						96 Watt	8.66 x 2.68 x 1.53						
				120						120 Watt	8.66 x 2.68 x 1.53						
				150						150 Watt	8.97 x 2.68 x 1.58						
				185						185 Watt	8.97 x 2.68 x 1.58						
				240						240 Watt	9.88 x 2.68 x 1.58						
				320						320 Watt	9.92 x 3.54 x 1.72						
480	480 Watt	10.32 x 4.92 x 1.72															
600	600 Watt	11.02 X 5.67 X 1.91															
FPD Dimming min 1% (Forward Phase)		+	20	20 Watt	+	IP67	Outdoor	120V	24V	4.92 x 2.20 x 0.79							
				40						40 Watt	4.92 x 2.20 x 0.79						
				60						60 Watt	4.92 x 2.20 x 0.79						
				75						75 Watt	4.92 x 2.20 x 0.79						
				96						96 Watt	4.92 x 2.20 x 0.79						
				FPD Dimming min 1% (Forward Phase) with junction box							+	20	20 Watt	+	IP67	Outdoor	120V
40	40 Watt	5.60 x 2.00 x 2.14															
60	60 Watt	6.62 x 2.58 x 2.33															
96	96 Watt	6.62 x 2.58 x 2.33															
150	150 Watt	9.80 x 3.00 x 2.74															
200	200 Watt	9.80 x 3.00 x 2.74															
300	300 Watt	10.07 x 4.20 x 3.50															

CUSTOMIZATION	TL48	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓					✓	✓	
Installing tapelight onto extrusion						✓	✓	
Cutting diffuser to specified length		✓				✓	✓	
Cutting extrusion to specified length			✓			✓	✓	
Miter corner extrusion and diffuser				✓				
Filling extrusion with polyurethane (2 ft submersible)								✓
Customize extrusion to specified color					✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓