
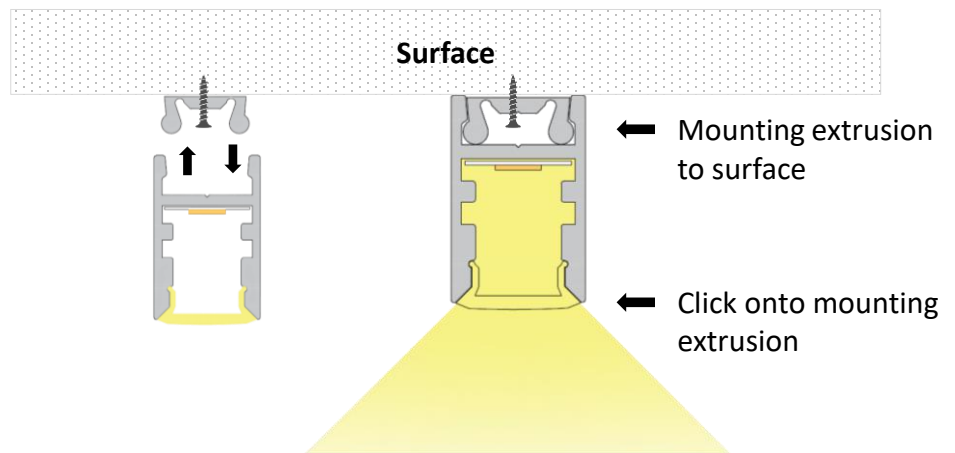


The AB02 extrusion, with its sleek profile, is perfectly suited for spaces requiring subtle yet potent lighting. It employs a two-component system: a mounting piece for ceiling attachment and a main fixture that clicks into the mount, ensuring a flush fit with no visible screws, all in efficient anodized aluminum for excellent heat dissipation.

AB02

AB02 + AB02-SL
Satin Lens

AB02 + AB02-CL
Clear Lens



Product Detail

Material:	Extruded Aluminum
Color:	Anodized Silver
Dimension (in):	L 78.74" x W 0.38" x H 0.59"
Customization:	Cut to specified length

Applications

- | | |
|---|-----------------------------------|
| <input type="checkbox"/> Narrow/Shallow | <input type="checkbox"/> Cove |
| <input type="checkbox"/> Bathroom | <input type="checkbox"/> Millwork |
| <input type="checkbox"/> Wall | <input type="checkbox"/> Handrail |
| <input type="checkbox"/> Furniture | <input type="checkbox"/> Vanity |
| <input type="checkbox"/> Steps/Staircases | <input type="checkbox"/> Office |
| <input type="checkbox"/> Under Cabinet | |

Compatible LED Tapelight

Product	Output (~lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (~lm/watt)	CRI	Voltage	Max Run Length	Cut Increment
---------	-----------------	---------	--------------------	---------------------	-----	---------	----------------	---------------








4mm Tape Light

L240	240	55	2.7	88	>90	24V	16'	1.5"
------	-----	----	-----	----	-----	-----	-----	------

Ordering Code: AB02 + Tapelight + Accessories + Lengths

AB02	- SL	- LW-4	- L200	IP54	CT35	- EC	- 4'
Extrusion	Lens	Tapelight				End Cap	Length
AB02	CL – Clear Lens SL – Satined Lens	LW-4 – Tape Light	L240 ~240 lm/ft	IP54	CT27 2700K CT30 3000K CT35 3500K CT40 4000K	EC – End Cap	Enter run length

Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67						
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION				
NTR Non-Dimming [UL Recognized]			50	50 Watt		IP00 Indoor	88-264V	24V	3.90 x 3.82 x 1.42					
			75	75 Watt					5.08 x 3.82 x 1.50					
			100	100 Watt					6.26 x 3.82 x 1.50					
			150	150 Watt					7.84 x 3.85 x 1.50					
			200	200 Watt					8.46 x 4.53 x 1.18					
			320	320 Watt					8.46 x 4.53 x 1.18					
			750	750 Watt					9.84 x 5.00 x 1.61					
			960	960 Watt					11.60 x 5.00 x 1.61					
			12	12 Watt						IP42 Indoor	90-264V	24V	3.03 x 1.57 x 1.14	
			16	16 Watt									3.03 x 1.57 x 1.14	
		25	25 Watt	3.31 x 2.24 x 1.16										
		35	35 Watt	3.31 x 2.24 x 1.16										
		20	20 Watt		IP67 Outdoor	90-264V	24V	4.65 x 1.38 x 1.02						
		35	35 Watt					5.83 x 1.57 x 1.18						
		60	60 Watt					6.40 x 1.67 x 1.26						
		100	100 Watt					7.48 x 2.05 x 1.46						
		150	150 Watt					7.52 x 2.48 x 1.48						
		240	240 Watt					9.61 x 2.68 x 1.53						
		320	320 Watt	9.92 x 3.54 x 1.72										
DTR Dimming min 10% (0-10V) [UL Recognized]			16	16 Watt		IP30 Indoor	90-305V	24V	5.83 x 1.57 x 1.26					
			25	25 Watt						IP67 Outdoor	90-305V	24V	5.83 x 1.57 x 1.26	
			40	40 Watt									6.40 x 1.70 x 1.26	
			60	60 Watt									6.40 x 1.70 x 1.26	
			90	90 Watt									6.34 x 2.40 x 1.42	
			96	96 Watt									8.66 x 2.68 x 1.53	
			120	120 Watt									8.66 x 2.68 x 1.53	
			150	150 Watt									8.97 x 2.68 x 1.58	
			185	185 Watt									8.97 x 2.68 x 1.58	
			240	240 Watt									9.88 x 2.68 x 1.58	
		320	320 Watt	9.92 x 3.54 x 1.72										
		480	480 Watt	10.32 x 4.92 x 1.72										
		600	600 Watt	11.02 X 5.67 X 1.91										
FPD Dimming min 1% (Forward Phase) [UL Recognized]			20	20 Watt		IP67 Outdoor	120V	24V	4.92 x 2.20 x 0.79					
			40	40 Watt					4.92 x 2.20 x 0.79					
			60	60 Watt					4.92 x 2.20 x 0.79					
			75	75 Watt					4.92 x 2.20 x 0.79					
			96	96 Watt					4.92 x 2.20 x 0.79					
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20	20 Watt		IP14 Outdoor	120V	24V	5.60 x 2.00 x 2.14					
			40	40 Watt					5.60 x 2.00 x 2.14					
			60	60 Watt					6.62 x 2.58 x 2.33					
			96	96 Watt					6.62 x 2.58 x 2.33					
			150	150 Watt					9.80 x 3.00 x 2.74					
			200	200 Watt					9.80 x 3.00 x 2.74					
		300	300 Watt	10.07 x 4.20 x 3.50										

CUSTOMIZATION	TL48	DC99	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓						✓	✓	
Daisy Chain: Cut tapelight to specified length + 2", 6", or 12" jumper cable daisy chain between 2 run lengths		✓							
Installing tapelight onto extrusion							✓	✓	
Cutting diffuser to specified length			✓				✓	✓	
Cutting extrusion to specified length				✓			✓	✓	
Miter corner extrusion and diffuser					✓				
Filling extrusion with polyurethane (2 ft submersible)									✓
Customize extrusion to specified color						✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓	✓