

The BE08 is a popular choice for recessed lighting solutions, accommodating the full range of Beulux lumen output tapes within its compact form. Constructed from anodized aluminum, it excels in heat dissipation, ensuring longevity and performance.




**BE08**

**BE08 + BE08-SLS**  
Seamless  
Satined Lens

**BE08 + BE08-CLS**  
Seamless  
Clear Lens



Seamless Lens available up to 65'

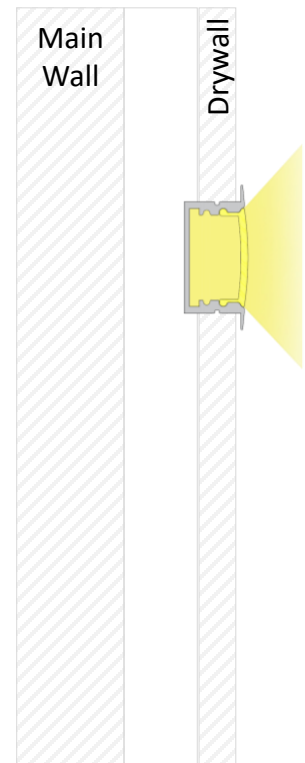

**BE08-EC**  
End Cap

**BL15-MCL**  
Mounting Clip

**BA08-RS**  
Recessed Spring

**BL15-AA**  
Adj. Angle

**BL15-AA90**  
90° Adj. Angle



## Product Detail:

Material:	Extruded Aluminum
Color:	Anodized Silver
Dimension (in):	L 78.74" x W 1.20" x H 0.53"
Customization:	Cut to specified length

## Applications:

- Recessed with Trim
- Transition Wall/Ceiling
- Hallways
- Millwork
- Vanity
- Office
- Retail

## Compatible LED Tapelight

Product	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	---------	--------------------	--------------------	-----	---------	------------	---------

### Florence (Specification Grade)

L90	~ 90	36	~ 0.73	~ 123	>90	24V	75'	1.97"
L200	~ 200	36	~ 1.46	~ 140	>90	24V	49'	1.97"
L360	~ 360	36	~ 3.12	~ 117	>90	24V	42'	1.97"
L500	~ 500	36	~ 4.39	~ 135	>90	24V	36'	1.97"
L780	~ 780	36	~ 6.72	~ 108	>90	24V	24'	1.97"
L990	~ 990	36	~ 9.36	~ 106	>90	24V	16'	1.97"
RGB-3535	~ 170	36	~ 4.4	~ 39	N/A	24V	23'	1.97"
RGB-3838	~ 280	73	~ 5.0	~ 56	N/A	24V	16'	1.00"
RGB-5050	~ 230	29	~ 7.0	~ 23	N/A	24V	13'	2.46"
RGBW	~ 330	29	~ 7.3	~ 47	N/A	24V	13'	2.46"
TW1865	~ 60-850	73	~ 5.8	~ 10-146	>90	24V	16'	1.97"
TW2740	~ 210-430	73	~ 5.8	~ 36-74	>90	24V	16'	1.97"
Dim-To-Warm	~ 168	73	~ 4.4	~ 38	>90	24V	16'	1.97"

### Athens (Economy)

L240	~ 240	36	~ 2.29	~ 115	>90	24V	39'	1.97"
L460	~ 460	36	~ 4.27	~ 115	>90	24V	26'	1.97"
L680	~ 680	36	~ 6.40	~ 105	>90	24V	20'	1.97"

## Compatible SOB Tapelight

Product	Output (lm/ft)	IP Rating	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	-----------	--------------------	--------------------	-----	---------	------------	---------

### Coblence H (High CRI)

L195	~ 195	IP20	~ 2.93	~ 80	>97	24V	49'	1.97"
L220	~ 220	IP67	~ 2.93	~ 80	>97	24V	65'	1.97"
L325	~ 325	IP67	~ 4.88	~ 70	>97	24V	32'	1.16"








### Coblence S (Specification Grade)

L280	~ 280	IP20	~ 2.93	~ 100	>90	24V	49'	1.97"
L335	~ 335	IP67	~ 2.93	~ 120	>90	24V	65'	1.97"
L465	~ 465	IP67	~ 4.88	~ 100	>90	24V	32'	1.16"
RGBW	RGBW	IP67	~ 4.27	~ 50	N/A	24V	16'	2.19"

## Ordering Code: BE08 + Tapelight + Accessories + Lengths

BE08	- SL	- F	- L200	IP00	CT35	- EC	- MC	- 4'
Extrusion	Lens	Tapelight				End Cap	Mounting	Length
BE08	<b>CLS</b> – Seamless Clear Lens  <b>SLS</b> – Seamless Satined Lens	F – Florence	<b>L090</b> ~90 lm/ft	<b>IP00</b> <b>IP66</b>	<b>CT27</b> 2700K	<b>EC</b> – End Cap	<b>MC</b> – Mounting Clip  <b>RS</b> – Recessed Spring  <b>AA</b> – Adjustable Angle  <b>AA90</b> – 90° Adjustable Angle	Enter run length
			<b>L200</b> ~200 lm/ft		<b>CT30</b> 3000K			
			<b>L360</b> ~360 lm/ft		<b>CT35</b> 3500K			
			<b>L500</b> ~500 lm/ft		<b>CT40</b> 4000K			
			<b>L780</b> ~780 lm/ft					
			<b>L990</b> ~990 lm/ft					
	<b>RGB-3535</b> RGB	<b>IP20</b> N/A						
	<b>RGB-3838</b> RGB	<b>IP54</b>						
	<b>RGB-5050</b> RGB	<b>IP20</b> N/A						
	<b>IP65</b>							
	<b>RGBW</b> RGBW	<b>IP00</b> N/A						
	<b>IP54</b>							
<b>TW1865</b> TW	<b>IP00</b> 1800-6500K							
<b>TW2740</b> TW	<b>IP65</b> 2700-4000K							
	<b>DTW</b> Dim-To-Warm	<b>IP00</b> <b>CT2130</b> 2100-3000K						
	<b>IP54</b>							
	<b>A</b> – Athens	<b>L240</b> ~240 lm/ft	<b>IP00</b> <b>CT27</b> 2700K					
		<b>L460</b> ~460 lm/ft	<b>IP66</b> <b>CT30</b> 3000K					
		<b>L680</b> ~680 lm/ft	<b>CT35</b> 3500K					
			<b>CT40</b> 4000K					
	<b>CH</b> – Coblence H	<b>L195</b> ~195 lm/ft	<b>IP20</b> <b>CT27</b> 2700K					
		<b>L220</b> ~220 lm/ft	<b>IP67</b> <b>CT30</b> 3000K					
		<b>L235</b> ~235 lm/ft	<b>IP67</b> <b>CT35</b> 3500K					
			<b>CT40</b> 4000K					
	<b>CS</b> – Coblence S	<b>L280</b> ~280 lm/ft	<b>IP20</b> <b>CT27</b> 2700K					
		<b>L335</b> ~335 lm/ft	<b>IP67</b> <b>CT30</b> 3000K					
		<b>L465</b> ~465 lm/ft	<b>IP67</b> <b>CT35</b> 3500K					
			<b>CT40</b> 4000K					
	<b>RGBW</b> RGBW		<b>IP67</b> N/A					

## Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67									
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION							
<b>NTR</b> Non-Dimming [UL Recognized]			<b>50</b>	50 Watt		<b>IP00</b> Indoor		88-264V	24V	3.90 x 3.82 x 1.42							
			<b>75</b>	75 Watt						5.08 x 3.82 x 1.50							
			<b>100</b>	100 Watt						6.26 x 3.82 x 1.50							
			<b>150</b>	150 Watt						7.84 x 3.85 x 1.50							
			<b>200</b>	200 Watt						8.46 x 4.53 x 1.18							
			<b>320</b>	320 Watt						8.46 x 4.53 x 1.18							
			<b>750</b>	750 Watt						9.84 x 5.00 x 1.61							
			<b>960</b>	960 Watt						11.60 x 5.00 x 1.61							
			<b>12</b>	12 Watt							<b>IP42</b> Indoor		90-264V	24V	3.03 x 1.57 x 1.14		
			<b>16</b>	16 Watt											3.03 x 1.57 x 1.14		
		<b>25</b>	25 Watt	3.31 x 2.24 x 1.16													
		<b>35</b>	35 Watt	3.31 x 2.24 x 1.16													
		<b>20</b>	20 Watt		<b>IP67</b> Outdoor		90-264V	24V	4.65 x 1.38 x 1.02								
		<b>35</b>	35 Watt						5.83 x 1.57 x 1.18								
		<b>60</b>	60 Watt						6.40 x 1.67 x 1.26								
		<b>100</b>	100 Watt						7.48 x 2.05 x 1.46								
		<b>150</b>	150 Watt						7.52 x 2.48 x 1.48								
		<b>240</b>	240 Watt						9.61 x 2.68 x 1.53								
		<b>320</b>	320 Watt	9.92 x 3.54 x 1.72													
<b>DTR</b> Dimming min 10% (0-10V) [UL Recognized]			<b>16</b>	16 Watt		<b>IP30</b> Indoor		90-305V	24V	5.83 x 1.57 x 1.26							
			<b>25</b>	25 Watt							<b>IP67</b> Outdoor	90-305V	24V	5.83 x 1.57 x 1.26			
			<b>40</b>	40 Watt										6.40 x 1.70 x 1.26			
			<b>60</b>	60 Watt										6.40 x 1.70 x 1.26			
			<b>90</b>	90 Watt										6.34 x 2.40 x 1.42			
			<b>96</b>	96 Watt										8.66 x 2.68 x 1.53			
			<b>120</b>	120 Watt										8.66 x 2.68 x 1.53			
			<b>150</b>	150 Watt										8.97 x 2.68 x 1.58			
			<b>185</b>	185 Watt										8.97 x 2.68 x 1.58			
			<b>240</b>	240 Watt										9.88 x 2.68 x 1.58			
		<b>320</b>	320 Watt	9.92 x 3.54 x 1.72													
		<b>480</b>	480 Watt	10.32 x 4.92 x 1.72													
		<b>600</b>	600 Watt	11.02 X 5.67 X 1.91													
<b>FPD</b> Dimming min 1% (Forward Phase) [UL Recognized]			<b>20</b>	20 Watt		<b>IP67</b> Outdoor		120V	24V	4.92 x 2.20 x 0.79							
			<b>40</b>	40 Watt						4.92 x 2.20 x 0.79							
			<b>60</b>	60 Watt						4.92 x 2.20 x 0.79							
			<b>75</b>	75 Watt						4.92 x 2.20 x 0.79							
			<b>96</b>	96 Watt						4.92 x 2.20 x 0.79							
<b>FPD</b> Dimming min 1% (Forward Phase) with junction box [ETL Listed]			<b>20</b>	20 Watt		<b>IP14</b> Outdoor		120V	24V	5.60 x 2.00 x 2.14							
			<b>40</b>	40 Watt						5.60 x 2.00 x 2.14							
			<b>60</b>	60 Watt						6.62 x 2.58 x 2.33							
			<b>96</b>	96 Watt						6.62 x 2.58 x 2.33							
			<b>150</b>	150 Watt						9.80 x 3.00 x 2.74							
			<b>200</b>	200 Watt						9.80 x 3.00 x 2.74							
		<b>300</b>	300 Watt	10.07 x 4.20 x 3.50													

CUSTOMIZATION	TL48	DC99	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓						✓	✓	
Daisy Chain: Cut tapelight to specified length + 2", 6", or 12" jumper cable daisy chain between 2 run lengths		✓							
Installing tapelight onto extrusion							✓	✓	
Cutting diffuser to specified length			✓				✓	✓	
Cutting extrusion to specified length				✓			✓	✓	
Miter corner extrusion and diffuser					✓				
Filling extrusion with polyurethane (2 ft submersible)									✓
Customize extrusion to specified color						✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓	✓