


The CT06 stands out with its dual-purpose design, serving as both a sturdy closet rod and a compact lighting fixture. This unique extrusion is crafted from high-quality anodized aluminum, blending functionality with elegance.






CT06



CT06 + CT99-CL60
60° Clear Lens

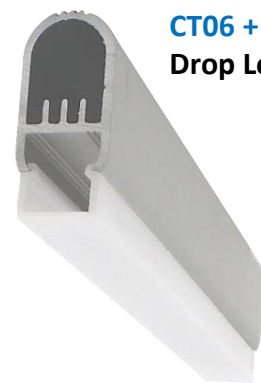

CT06 + CT99-DL
Drop Lens

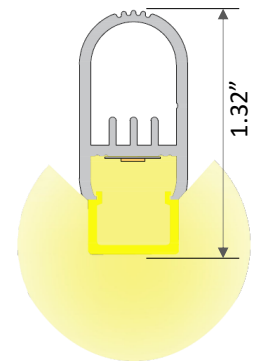

CT06-EC
End Cap



CT06-ES
End Support



CT06-CS
Center Support



Product Detail

Material:	Extruded Aluminum
Color:	Anodized Silver
Dimension (in):	L 78.74" x W 0.59" x H 1.03"
Customization:	Cut to specified length

Applications

- Closet Rod

Compatible LED Tapelight

Product	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	---------	--------------------	--------------------	-----	---------	------------	---------

Florence (Specification Grade)

L90	~ 90	36	~ 0.73	~ 123	>90	24V	75'	1.97"
L200	~ 200	36	~ 1.46	~ 140	>90	24V	49'	1.97"
L360	~ 360	36	~ 3.12	~ 117	>90	24V	42'	1.97"
L500	~ 500	36	~ 4.39	~ 135	>90	24V	36'	1.97"
L780	~ 780	36	~ 6.72	~ 108	>90	24V	24'	1.97"
RGB-3535	~ 170	36	~ 4.4	~ 39	N/A	24V	23'	1.97"
RGB-5050	~ 230	29	~ 7.0	~ 23	N/A	24V	13'	2.46"
TW1865	~ 60-850	73	~ 5.8	~ 10-146	>90	24V	16'	1.97"
TW2740	~ 210-430	73	~ 5.8	~ 36-74	>90	24V	16'	1.97"
Dim-To-Warm	~ 168	73	~ 4.4	~ 38	>90	24V	16'	1.97"

Athens (Economy)

L240	~ 240	36	~ 2.29	~ 115	>90	24V	39'	1.97"
L460	~ 460	36	~ 4.27	~ 115	>90	24V	26'	1.97"
L680	~ 680	36	~ 6.40	~ 105	>90	24V	20'	1.97"

Compatible SOB Tapelight

Product	Output (lm/ft)	IP Rating	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	-----------	--------------------	--------------------	-----	---------	------------	---------

Coblence H (High CRI)

L195	~ 195	IP20	~ 2.93	~ 80	>97	24V	49'	1.97"
------	-------	------	--------	------	-----	-----	-----	-------

Coblence S (Specification Grade)

L280	~ 280	IP20	~ 2.93	~ 100	>90	24V	49'	1.97"
------	-------	------	--------	-------	-----	-----	-----	-------








Note: Compatible with Drop Lens only for CT06 + Coblence

Ordering Code: CT06 + Tapelight + Accessories + Lengths

CT06	- DL	- F	- L200	IP00	CT35	- EC	- MC	- 4'	
Extrusion	Lens	Tapelight				End Cap	Mounting	Length	
CT06	CL60 - 60° Lens	F – Florence	L090	~90 lm/ft	IP00	CT27 2700K	EC – End Cap	ES – End Support	Enter run length
			L200	~200 lm/ft	IP66	CT30 3000K			
			L360	~360 lm/ft		CT35 3500K			
			L500	~500 lm/ft		CT40 4000K			
			L780	~780 lm/ft					
			L990	~990 lm/ft					
	DL - Drop Lens			RGB-3535	RGB	IP20 IP54	N/A		CS – Center Support
				RGB-5050	RGB	IP20 IP65	N/A		
				TW1865	TW	IP00	1800-6500K		
				TW2740	TW	IP65	2700-4000K		
				DTW	Dim-To- Warm	IP00 IP54	CT2130 2100-3000K		
		A – Athens	L240	~240 lm/ft	IP00	CT27 2700K			
			L460	~460 lm/ft	IP66	CT30 3000K			
			L680	~680 lm/ft		CT35 3500K			
						CT40 4000K			
		CH – Coblence H	L195	~195 lm/ft	IP20	CT27 2700K			
						CT30 3000K			
						CT35 3500K			
						CT40 4000K			
		CS – Coblence S	L280	~280 lm/ft	IP20	CT27 2700K			
						CT30 3000K			
						CT35 3500K			
						CT40 4000K			

Note: Compatible with Drop Lens only for CT06 + Coblence

Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67									
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION							
NTR Non-Dimming [UL Recognized]		50	50 Watt			IP00 Indoor		88-264V	24V	3.90 x 3.82 x 1.42							
		75	75 Watt							5.08 x 3.82 x 1.50							
		100	100 Watt							6.26 x 3.82 x 1.50							
		150	150 Watt							7.84 x 3.85 x 1.50							
		200	200 Watt							8.46 x 4.53 x 1.18							
		320	320 Watt							8.46 x 4.53 x 1.18							
		750	750 Watt							9.84 x 5.00 x 1.61							
		960	960 Watt							11.60 x 5.00 x 1.61							
		12	12 Watt								IP42 Indoor		90-264V	24V	3.03 x 1.57 x 1.14		
		16	16 Watt												3.03 x 1.57 x 1.14		
25	25 Watt		3.31 x 2.24 x 1.16														
35	35 Watt		3.31 x 2.24 x 1.16														
		20	20 Watt			IP67 Outdoor		90-264V	24V	4.65 x 1.38 x 1.02							
		35	35 Watt							5.83 x 1.57 x 1.18							
		60	60 Watt							6.40 x 1.67 x 1.26							
		100	100 Watt							7.48 x 2.05 x 1.46							
		150	150 Watt							7.52 x 2.48 x 1.48							
		240	240 Watt							9.61 x 2.68 x 1.53							
		320	320 Watt							9.92 x 3.54 x 1.72							
		320	320 Watt							9.92 x 3.54 x 1.72							
DTR Dimming min 10% (0-10V) [UL Recognized]		16	16 Watt			IP30 Indoor		90-305V	24V	5.83 x 1.57 x 1.26							
		25	25 Watt								IP67 Outdoor		90-305V	24V	5.83 x 1.57 x 1.26		
		40	40 Watt												6.40 x 1.70 x 1.26		
		60	60 Watt												6.40 x 1.70 x 1.26		
		90	90 Watt												6.34 x 2.40 x 1.42		
		96	96 Watt												8.66 x 2.68 x 1.53		
		120	120 Watt												8.66 x 2.68 x 1.53		
		150	150 Watt												8.97 x 2.68 x 1.58		
		185	185 Watt												8.97 x 2.68 x 1.58		
		240	240 Watt												9.88 x 2.68 x 1.58		
		320	320 Watt												9.92 x 3.54 x 1.72		
480	480 Watt		10.32 x 4.92 x 1.72														
600	600 Watt		11.02 X 5.67 X 1.91														
FPD Dimming min 1% (Forward Phase) [UL Recognized]		20	20 Watt			IP67 Outdoor		120V	24V	4.92 x 2.20 x 0.79							
		40	40 Watt							4.92 x 2.20 x 0.79							
		60	60 Watt							4.92 x 2.20 x 0.79							
		75	75 Watt							4.92 x 2.20 x 0.79							
		96	96 Watt							4.92 x 2.20 x 0.79							
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]		20	20 Watt			IP14 Outdoor		120V	24V	5.60 x 2.00 x 2.14							
		40	40 Watt							5.60 x 2.00 x 2.14							
		60	60 Watt							6.62 x 2.58 x 2.33							
		96	96 Watt							6.62 x 2.58 x 2.33							
		150	150 Watt							9.80 x 3.00 x 2.74							
		200	200 Watt							9.80 x 3.00 x 2.74							
300	300 Watt		10.07 x 4.20 x 3.50														

CUSTOMIZATION	TL48	DC99	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓						✓	✓	
Daisy Chain: Cut tapelight to specified length + 2", 6", or 12" jumper cable daisy chain between 2 run lengths		✓							
Installing tapelight onto extrusion							✓	✓	
Cutting diffuser to specified length			✓				✓	✓	
Cutting extrusion to specified length				✓			✓	✓	
Miter corner extrusion and diffuser					✓				
Filling extrusion with polyurethane (2 ft submersible)									✓
Customize extrusion to specified color						✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓	✓