

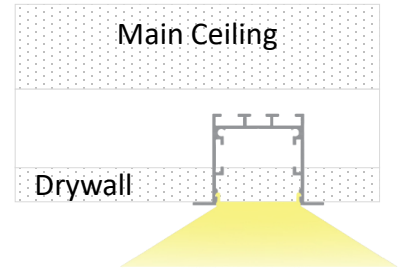
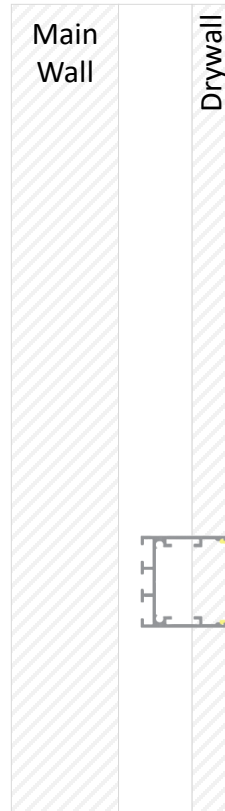



The JK08, crafted from high alloy aluminum, boasts impressive heat dissipation capabilities. It's compatible with virtually all tape light lines and shines when used with Madrid 120V RGBW tape, ensuring uniformity without pixelation.



JK08 + JK08-SL
Satined Lens



JK08-EC
End Cap



JK08-RS
Recessed Spring



JK18-CN180
Linear Connector



JK18-CN90
90° Connector



JK18-VN90
90° Vertical Connector



Product Detail

Material:	Extruded Aluminum
Color:	Anodized Silver
Dimension (in):	L 78.74" x W 1.38" x H 1.38"
Customization:	Cut to specified length

Applications

- Surface Mount
- Ceiling
- Hallways
- Office
- Wall

Compatible LED Tapelight

Product	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	---------	--------------------	--------------------	-----	---------	------------	---------

Florence (Specification Grade)

L90	~ 90	36	~ 0.73	~ 123	>90	24V	75'	1.97"
L200	~ 200	36	~ 1.46	~ 140	>90	24V	49'	1.97"
L360	~ 360	36	~ 3.12	~ 117	>90	24V	42'	1.97"
L500	~ 500	36	~ 4.39	~ 135	>90	24V	36'	1.97"
L780	~ 780	36	~ 6.72	~ 108	>90	24V	24'	1.97"
L990	~ 990	36	~ 9.36	~ 106	>90	24V	16'	1.97"
RGB-3535	~ 170	36	~ 4.4	~ 39	N/A	24V	23'	1.97"
RGB-3838	~ 280	73	~ 5.0	~ 56	N/A	24V	16'	1.00"
RGB-5050	~ 230	29	~ 7.0	~ 23	N/A	24V	13'	2.46"
RGBW	~ 330	29	~ 7.3	~ 47	N/A	24V	13'	2.46"
TW1865	~ 60-850	73	~ 5.8	~ 10-146	>90	24V	16'	1.97"
TW2740	~ 210-430	73	~ 5.8	~ 36-74	>90	24V	16'	1.97"
Dim-To-Warm	~ 168	73	~ 4.4	~ 38	>90	24V	16'	1.97"

Athens (Economy)

L240	~ 240	36	~ 2.29	~ 115	>90	24V	39'	1.97"
L460	~ 460	36	~ 4.27	~ 115	>90	24V	26'	1.97"
L680	~ 680	36	~ 6.40	~ 105	>90	24V	20'	1.97"

Madrid (Line Voltage)

L300	~ 300	18	~ 4.0	~ 75	>90	120V	164'	4.0"
L500	~ 500	28	~ 6.0	~ 85	>90	120V	100'	3.0"
RGBW	n/a	60	~ 3.0	n/a	>90	120V	164'	1.0'

Compatible SOB Tapelight

Product	Output (lm/ft)	IP Rating	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	-----------	--------------------	--------------------	-----	---------	------------	---------

Coblence H (High CRI)

L195	~ 195	IP20	~ 2.93	~ 80	>97	24V	49'	1.97"
L220	~ 220	IP67	~ 2.93	~ 80	>97	24V	65'	1.97"
L325	~ 325	IP67	~ 4.88	~ 70	>97	24V	32'	1.16"








Coblence S (Specification Grade)

L280	~ 280	IP20	~ 2.93	~ 100	>90	24V	49'	1.97"
L335	~ 335	IP67	~ 2.93	~ 120	>90	24V	65'	1.97"
L465	~ 465	IP67	~ 4.88	~ 100	>90	24V	32'	1.16"
RGBW	RGBW	IP67	~ 4.27	~ 50	N/A	24V	16'	2.19"

Ordering Code: JK02 + Tapelight + Accessories + Lengths

JK08	- SL	- M	- RGBW	IP65	N/A	- EC	- 4'	
Extrusion	Lens	Tapelight				End Cap	Length	
JK08	SL – Satined Lens	F – Florence	L090	~90 lm/ft	IP00	CT27	2700K	EC – End Cap Enter run length
			L200	~200 lm/ft	IP66	CT30	3000K	
			L360	~360 lm/ft		CT35	3500K	
			L500	~500 lm/ft		CT40	4000K	
			L780	~780 lm/ft				
			L990	~990 lm/ft				
			RGB-3535	RGB	IP20	N/A		
			RGB-3838	RGB	IP54	N/A		
			RGB-5050	RGB	IP20	N/A		
					IP65	N/A		
			RGBW	RGBW	IP00	N/A		
					IP54	N/A		
		TW1865	TW	IP00	1800-6500K			
		TW2740	TW	IP65	2700-4000K			
		DTW	Dim-To-Warm	IP00	CT2130			
				IP54	2100-3000K			
		A – Athens	L240	~240 lm/ft	IP00	CT27	2700K	
			L460	~460 lm/ft	IP66	CT30	3000K	
			L680	~680 lm/ft		CT35	3500K	
						CT40	4000K	
		M – Madrid	L300	~300 lm/ft	IP65	CT27	2700K	
			L500	~500 lm/ft		CT30	3000K	
						CT35	3500K	
						CT40	4000K	
RGBW	RGBW	IP65	N/A					
CH – Coblence H	L195	~195 lm/ft	IP20	CT27	2700K			
	L220	~220 lm/ft	IP67	CT30	3000K			
	L235	~235 lm/ft	IP67	CT35	3500K			
				CT40	4000K			
CS – Coblence S	L280	~280 lm/ft	IP20	CT27	2700K			
	L335	~335 lm/ft	IP67	CT30	3000K			
	L465	~465 lm/ft	IP67	CT35	3500K			
				CT40	4000K			
RGBW	RGBW	IP67	N/A					

Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67								
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION						
NTR Non-Dimming [UL Recognized]			50	50 Watt		IP00 Indoor		88-264V	24V	3.90 x 3.82 x 1.42						
			75	75 Watt						5.08 x 3.82 x 1.50						
			100	100 Watt						6.26 x 3.82 x 1.50						
			150	150 Watt						7.84 x 3.85 x 1.50						
			200	200 Watt						8.46 x 4.53 x 1.18						
			320	320 Watt						8.46 x 4.53 x 1.18						
			750	750 Watt						9.84 x 5.00 x 1.61						
			960	960 Watt						11.60 x 5.00 x 1.61						
			12	12 Watt							IP42 Indoor		90-264V	24V	3.03 x 1.57 x 1.14	
			16	16 Watt											3.03 x 1.57 x 1.14	
		25	25 Watt	3.31 x 2.24 x 1.16												
		35	35 Watt	3.31 x 2.24 x 1.16												
		20	20 Watt		IP67 Outdoor		90-264V	24V	4.65 x 1.38 x 1.02							
		35	35 Watt						5.83 x 1.57 x 1.18							
		60	60 Watt						6.40 x 1.67 x 1.26							
		100	100 Watt						7.48 x 2.05 x 1.46							
		150	150 Watt						7.52 x 2.48 x 1.48							
		240	240 Watt						9.61 x 2.68 x 1.53							
		320	320 Watt						9.92 x 3.54 x 1.72							
DTR Dimming min 10% (0-10V) [UL Recognized]			16	16 Watt		IP30 Indoor		90-305V	24V	5.83 x 1.57 x 1.26						
			25	25 Watt							IP67 Outdoor	90-305V	24V	5.83 x 1.57 x 1.26		
			40	40 Watt										6.40 x 1.70 x 1.26		
			60	60 Watt										6.40 x 1.70 x 1.26		
			90	90 Watt										6.34 x 2.40 x 1.42		
			96	96 Watt										8.66 x 2.68 x 1.53		
			120	120 Watt										8.66 x 2.68 x 1.53		
			150	150 Watt										8.97 x 2.68 x 1.58		
			185	185 Watt										8.97 x 2.68 x 1.58		
			240	240 Watt										9.88 x 2.68 x 1.58		
		320	320 Watt	9.92 x 3.54 x 1.72												
		480	480 Watt	10.32 x 4.92 x 1.72												
		600	600 Watt	11.02 X 5.67 X 1.91												
FPD Dimming min 1% (Forward Phase) [UL Recognized]			20	20 Watt		IP67 Outdoor		120V	24V	4.92 x 2.20 x 0.79						
			40	40 Watt						4.92 x 2.20 x 0.79						
			60	60 Watt						4.92 x 2.20 x 0.79						
			75	75 Watt						4.92 x 2.20 x 0.79						
			96	96 Watt						4.92 x 2.20 x 0.79						
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20	20 Watt		IP14 Outdoor		120V	24V	5.60 x 2.00 x 2.14						
			40	40 Watt						5.60 x 2.00 x 2.14						
			60	60 Watt						6.62 x 2.58 x 2.33						
			96	96 Watt						6.62 x 2.58 x 2.33						
			150	150 Watt						9.80 x 3.00 x 2.74						
			200	200 Watt						9.80 x 3.00 x 2.74						
		300	300 Watt	10.07 x 4.20 x 3.50												

CUSTOMIZATION	TL48	DC99	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓						✓	✓	
Daisy Chain: Cut tapelight to specified length + 2", 6", or 12" jumper cable daisy chain between 2 run lengths		✓							
Installing tapelight onto extrusion							✓	✓	
Cutting diffuser to specified length			✓				✓	✓	
Cutting extrusion to specified length				✓			✓	✓	
Miter corner extrusion and diffuser					✓				
Filling extrusion with polyurethane (2 ft submersible)									✓
Customize extrusion to specified color						✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓	✓