


The PH01 is a durable, **vandal-resistant**, recessed walk-over fixture made from solid aluminum and a robust one-piece PMMA extrusion, designed to withstand up to 30kN of weight and rated IP67 for water and dust resistance. Versatile in installation, it can be embedded in or placed above ground. Ideal for crafting uniform, shadow-free light lines, the PH01 can function as a standalone uplight or be linked with others for continuous, seamless illumination. This makes it an exceptional choice for both outdoor and indoor applications.

PH01-B
Flanges Above Ground



PH01-B
Flanges Inground

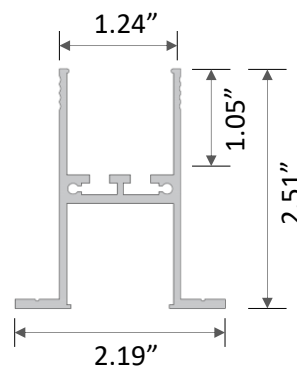

PH01-EC
End Cap




PH99-C
Cover




PH99-EC
End Cap



Flanges Above Ground

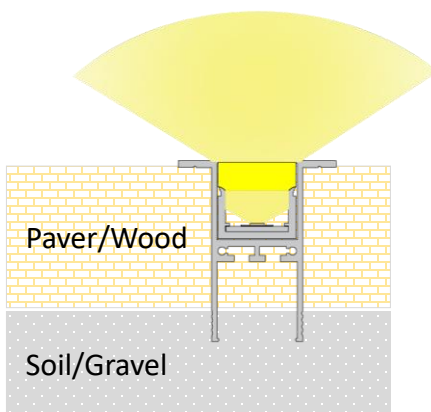

Flanges Inground

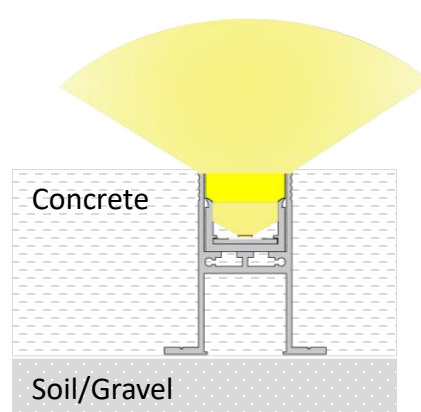


Product Detail

Material:	Extruded Aluminum & PMMA
Color:	Anodized Silver
Dimension (in):	L 78.74" x W 2.19" x H 2.51"
Customization:	Cut to specified length

Applications

- Recessed with Trim
- Outdoor Downlight
- Outdoor Uplight
- Stair Riser
- Step Light
- Staircases
- Hallways
- Facades

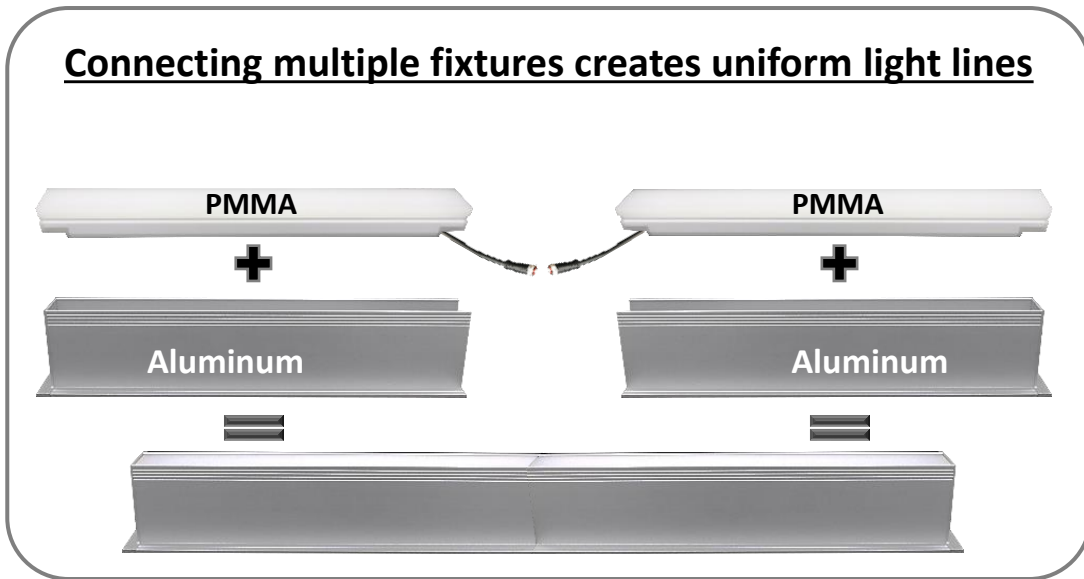

Compatible LED Tapelight

Product	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	---------	--------------------	--------------------	-----	---------	------------	---------

Florence (Specification Grade)

L90	~ 90	36	~ 0.73	~ 123	>90	24V	75'	1.97"
L200	~ 200	36	~ 1.46	~ 140	>90	24V	49'	1.97"
L360	~ 360	36	~ 3.12	~ 117	>90	24V	42'	1.97"
L500	~ 500	36	~ 4.39	~ 135	>90	24V	36'	1.97"
L780	~ 780	36	~ 6.72	~ 108	>90	24V	24'	1.97"
RGB-3535	~ 170	36	~ 4.4	~ 39	N/A	24V	23'	1.97"
RGB-3838	~ 280	73	~ 5.0	~ 56	N/A	24V	16'	1.00"
RGB-5050	~ 230	29	~ 7.0	~ 23	N/A	24V	13'	2.46"
RGBW	~ 330	29	~ 7.3	~ 47	N/A	24V	13'	2.46"
TW1865	~ 60-850	73	~ 5.8	~ 10-146	>90	24V	16'	1.97"
TW2740	~ 210-430	73	~ 5.8	~ 36-74	>90	24V	16'	1.97"
Dim-To-Warm	~ 168	73	~ 4.4	~ 38	>90	24V	16'	1.97"








Athens (Economy)

L240	~ 240	36	~ 2.29	~ 115	>90	24V	39'	1.97"
L460	~ 460	36	~ 4.27	~ 115	>90	24V	26'	1.97"
L680	~ 680	36	~ 6.40	~ 105	>90	24V	20'	1.97"

Ordering Code: PH01-B + Tapelight + Accessories + Lengths

PH01-B	- C	- F	- L200	IP00	CT35	- EC	- 4'		
Extrusion	Cover	Tapelight				End Cap	Length		
PH01-B	C – Cover	F – Florence	L090	~90 lm/ft	IP00	CT27	2700K	EC – End Cap Enter run length	
			L200	~200 lm/ft	IP66	CT30	3000K		
			L360	~360 lm/ft		CT35	3500K		
			L500	~500 lm/ft		CT40	4000K		
			L780	~780 lm/ft					
				RGB-3535	RGB	IP20	N/A		
				RGB-3838	RGB	IP54			
				RGB-5050	RGB	IP20 IP65	N/A		
				RGBW	RGBW	IP00 IP54	N/A		
				TW1865	TW	IP00	1800-6500K		
				TW2740	TW	IP65	2700-4000K		
		DTW	Dim-To-Warm	IP00 IP54	CT2130 2100-3000K				
		A – Athens	L240	~240 lm/ft	IP00	CT27	2700K		
			L460	~460 lm/ft	IP66	CT30	3000K		
			L680	~680 lm/ft		CT35	3500K		
						CT40	4000K		

Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67							
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION					
NTR Non-Dimming [UL Recognized]			50	50 Watt		IP00 Indoor		88-264V	24V	3.90 x 3.82 x 1.42					
		75	75 Watt	5.08 x 3.82 x 1.50											
		100	100 Watt	6.26 x 3.82 x 1.50											
		150	150 Watt	7.84 x 3.85 x 1.50											
		200	200 Watt	8.46 x 4.53 x 1.18											
		320	320 Watt	8.46 x 4.53 x 1.18											
		750	750 Watt	9.84 x 5.00 x 1.61											
		960	960 Watt	11.60 x 5.00 x 1.61											
		12	12 Watt							IP42 Indoor		90-264V	24V	3.03 x 1.57 x 1.14	
		16	16 Watt											3.03 x 1.57 x 1.14	
	25	25 Watt	3.31 x 2.24 x 1.16												
	35	35 Watt	3.31 x 2.24 x 1.16												
	20	20 Watt		IP67 Outdoor		90-264V	24V	4.65 x 1.38 x 1.02							
	35	35 Watt						5.83 x 1.57 x 1.18							
	60	60 Watt						6.40 x 1.67 x 1.26							
	100	100 Watt						7.48 x 2.05 x 1.46							
	150	150 Watt						7.52 x 2.48 x 1.48							
	240	240 Watt						9.61 x 2.68 x 1.53							
	320	320 Watt						9.92 x 3.54 x 1.72							
DTR Dimming min 10% (0-10V) [UL Recognized]		16	16 Watt		IP30 Indoor		90-305V	24V	5.83 x 1.57 x 1.26						
		25	25 Watt							IP67 Outdoor	90-305V	24V	5.83 x 1.57 x 1.26		
		40	40 Watt										6.40 x 1.70 x 1.26		
		60	60 Watt										6.40 x 1.70 x 1.26		
		90	90 Watt										6.34 x 2.40 x 1.42		
		96	96 Watt										8.66 x 2.68 x 1.53		
		120	120 Watt										8.66 x 2.68 x 1.53		
		150	150 Watt										8.97 x 2.68 x 1.58		
		185	185 Watt										8.97 x 2.68 x 1.58		
		240	240 Watt										9.88 x 2.68 x 1.58		
	320	320 Watt	9.92 x 3.54 x 1.72												
	480	480 Watt	10.32 x 4.92 x 1.72												
	600	600 Watt	11.02 X 5.67 X 1.91												
FPD Dimming min 1% (Forward Phase) [UL Recognized]		20	20 Watt		IP67 Outdoor		120V	24V	4.92 x 2.20 x 0.79						
		40	40 Watt						4.92 x 2.20 x 0.79						
		60	60 Watt						4.92 x 2.20 x 0.79						
		75	75 Watt						4.92 x 2.20 x 0.79						
		96	96 Watt						4.92 x 2.20 x 0.79						
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]		20	20 Watt		IP14 Outdoor		120V	24V	5.60 x 2.00 x 2.14						
		40	40 Watt						5.60 x 2.00 x 2.14						
		60	60 Watt						6.62 x 2.58 x 2.33						
		96	96 Watt						6.62 x 2.58 x 2.33						
		150	150 Watt						9.80 x 3.00 x 2.74						
		200	200 Watt						9.80 x 3.00 x 2.74						
	300	300 Watt	10.07 x 4.20 x 3.50												

CUSTOMIZATION	TL48	DC99	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓						✓	✓	
Daisy Chain: Cut tapelight to specified length + 2", 6", or 12" jumper cable daisy chain between 2 run lengths		✓							
Installing tapelight onto extrusion							✓	✓	
Cutting diffuser to specified length			✓				✓	✓	
Cutting extrusion to specified length				✓			✓	✓	
Miter corner extrusion and diffuser					✓				
Filling extrusion with polyurethane (2 ft submersible)									✓
Customize extrusion to specified color						✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓	✓