







The VT03, a medium-sized extrusion made from premium anodized aluminum, seamlessly blends into contemporary settings as either a pendant light or a surface-mounted fixture, offering a touch of modern elegance. It comes with unobtrusive mounting hardware for a clean installation. Paired with the VT03-SL, a satined polycarbonate diffusor, it forms a stylish cylindrical silhouette, enhancing the aesthetic of any space with its sophisticated design.

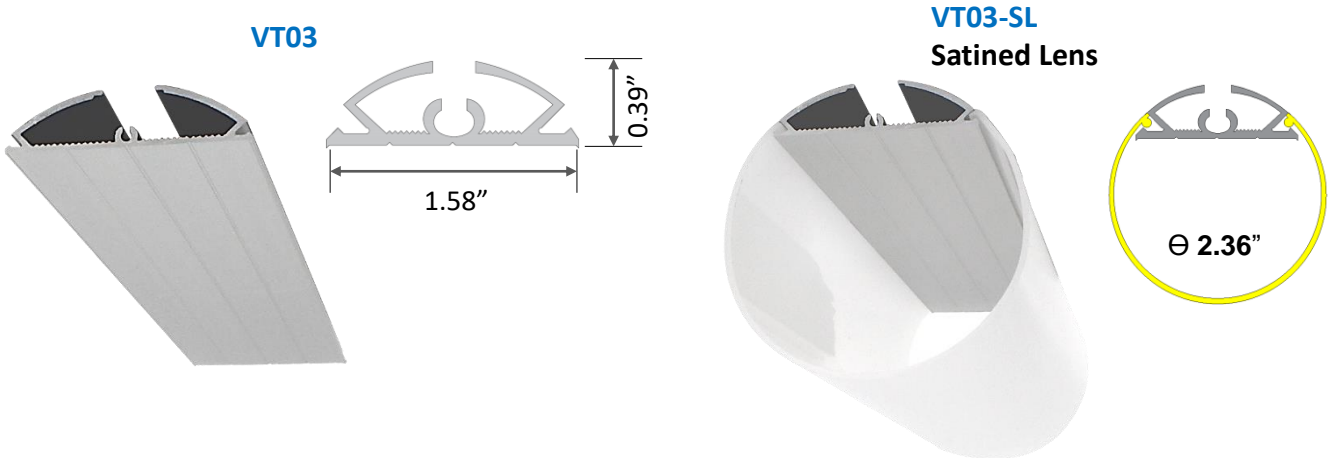

VT03-EC	VT03-CN2S	ZZ99-CP-AP	ZZ99-CP-PF	ZZ99-SK
				
End Cap	2-Sides Connector	Cable Coupling	Powerfeed Coupling	Suspension Kit

## Product Detail

Material:	Extruded Aluminum
Color:	Anodized Silver
Size in inch:	L 78.74" x W 1.58" x H 0.39"
Customization:	Cut to specified length

## Applications

- Pendant
- Surface Mount
- Hallways
- Wall Sconces
- Vanity
- Office
- Retail

### Compatible LED Tapelight

Product	Output (~lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (~lm/watt)	CRI	Voltage	Max Run Length	Cut Increment
---------	-----------------	---------	--------------------	---------------------	-----	---------	----------------	---------------

#### Vienna (High End)

L90	90	36	0.7	123	>90	24V	75'	1.97"
L270	270	36	2.7	108	>90	24V	34'	1.97"
L400	400	36	3.9	109	>90	24V	25'	1.97"
L610	610	36	6.2	104	>90	24V	18'	1.97"
L910	910	36	9.7	104	>90	24V	10'	1.97"
Dim-To-Warm	320	51	2.9	109	>80	24V	10'	3.28"

#### Florence (Mid-Range)

L200	200	36	1.6	125	>90	24V	55'	1.97"
L360	360	36	2.9	124	>90	24V	42'	1.97"
L500	500	36	4.3	116	>90	24V	32'	1.97"
L780	780	36	6.9	113	>90	24V	24'	1.97"
L990	990	36	9.2	108	>90	24V	16'	1.97"
RGB	200	36	7.3	29	N/A	24V	16'	1.97"
RGBW	330	29	7.3	47	N/A	24V	16'	2.46"
Tunable White	590	73	5.9	100	>90	24V	16'	1.97"
Dim-To-Warm	168	73	4.4	38	>90	24V	16'	1.97"

#### Athens (Economy)







L240	240	36	2.1	117	>90	24V	26'	1.97"
L460	460	36	4.1	114	>90	24V	16'	1.97"
L680	680	36	6.3	109	>90	24V	13'	1.97"

## Ordering Code: VT03 + Tapelight + Accessories + Lengths

VT03	- SL	- F	- L200	IP00	CT35	- EC	- MC	- 4'
------	------	-----	--------	------	------	------	------	------

Extrusion	Lens	Tapelight				End Cap	Mounting	Length			
VT03	SL – Satined Lens	V – Vienna	L90	~90 lm/ft	IP00	CT22	2200K	EC – End Cap	MC – Mounting Clip	Enter run length	
			L270	~270 lm/ft	IP66	CT27	2700K				
			L400	~400 lm/ft		CT30	3000K				
			L610	~610 lm/ft		CT35	3500K				
			L910	~910 lm/ft		CT40	4000K				
			DTW	Dim-To-Warm	IP00	CT1930	1900-3000K				
		F – Florence	L200	~200 lm/ft	IP00	CT27	2700K				CN2S – 2 Sides Connector
			L360	~360 lm/ft	IP66	CT30	3000K				
			L500	~500 lm/ft		CT35	3500K				
			L780	~780 lm/ft		CT40	4000K				
			L990	~990 lm/ft							
			RGB	RGB	IP00	N/A	CP – Coupling				
RGBW	RGBW		IP54								
TW	Tunable White										
A – Athens	DTW	Dim-To-Warm	IP00	CT2130	SK – Suspension Kit						
			IP54	2100-3000K							
	L240	~240 lm/ft	IP00	CT27		2700K					
	L460	~460 lm/ft	IP66	CT30	3000K						
	L680	~680 lm/ft		CT35	3500K						
				CT40	4000K						

## Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67									
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION							
<b>NTR</b> Non-Dimming		+	50	50 Watt	+	<b>IP00</b> Indoor		88-264V	24V	3.90 x 3.82 x 1.42							
			75	75 Watt						5.08 x 3.82 x 1.50							
			100	100 Watt						6.26 x 3.82 x 1.50							
			150	150 Watt						7.84 x 3.85 x 1.50							
			200	200 Watt						8.46 x 4.53 x 1.18							
			320	320 Watt						8.46 x 4.53 x 1.18							
			750	750 Watt						9.84 x 5.00 x 1.61							
			960	960 Watt						11.60 x 5.00 x 1.61							
			12	12 Watt						+	<b>IP42</b> Indoor		90-264V	24V	3.03 x 1.57 x 1.14		
			16	16 Watt											3.03 x 1.57 x 1.14		
			25	25 Watt											3.31 x 2.24 x 1.16		
			35	35 Watt											3.31 x 2.24 x 1.16		
		+	<b>IP67</b> Outdoor		90-264V	24V	4.65 x 1.38 x 1.02										
							35	35 Watt	5.83 x 1.57 x 1.18								
							60	60 Watt	6.40 x 1.67 x 1.26								
							100	100 Watt	7.48 x 2.05 x 1.46								
							150	150 Watt	7.52 x 2.48 x 1.48								
							240	240 Watt	9.61 x 2.68 x 1.53								
							320	320 Watt	9.92 x 3.54 x 1.72								
<b>DTR</b> Dimming min 10% (0-10V)		+	<b>16</b>	16 Watt	+	<b>IP30</b> Indoor		90-305V	24V	5.83 x 1.57 x 1.26							
			<b>25</b>	25 Watt						<b>IP67</b> Outdoor	90-305V	24V	5.83 x 1.57 x 1.26				
			<b>40</b>	40 Watt									6.40 x 1.70 x 1.26				
			<b>60</b>	60 Watt									6.40 x 1.70 x 1.26				
			<b>90</b>	90 Watt									6.34 x 2.40 x 1.42				
			<b>96</b>	96 Watt									8.66 x 2.68 x 1.53				
			<b>120</b>	120 Watt									8.66 x 2.68 x 1.53				
			<b>150</b>	150 Watt									8.97 x 2.68 x 1.58				
			<b>185</b>	185 Watt									8.97 x 2.68 x 1.58				
			<b>240</b>	240 Watt									9.88 x 2.68 x 1.58				
			<b>320</b>	320 Watt									9.92 x 3.54 x 1.72				
<b>480</b>	480 Watt	10.32 x 4.92 x 1.72															
<b>600</b>	600 Watt	11.02 x 5.67 x 1.91															
<b>FPD</b> Dimming min 1% (Forward Phase)		+	<b>IP67</b> Outdoor		120V	24V	4.92 x 2.20 x 0.79										
							40	40 Watt	4.92 x 2.20 x 0.79								
							60	60 Watt	4.92 x 2.20 x 0.79								
							75	75 Watt	4.92 x 2.20 x 0.79								
							96	96 Watt	4.92 x 2.20 x 0.79								
<b>FPD</b> Dimming min 1% (Forward Phase) with junction box		+	<b>IP14</b> Outdoor		120V	24V	5.60 x 2.00 x 2.14										
							40	40 Watt	5.60 x 2.00 x 2.14								
							60	60 Watt	6.62 x 2.58 x 2.33								
							96	96 Watt	6.62 x 2.58 x 2.33								
							150	150 Watt	9.80 x 3.00 x 2.74								
							200	200 Watt	9.80 x 3.00 x 2.74								
							300	300 Watt	10.07 x 4.20 x 3.50								

CUSTOMIZATION	TL48	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓					✓	✓	
Installing tapelight onto extrusion						✓	✓	
Cutting diffuser to specified length		✓				✓	✓	
Cutting extrusion to specified length			✓			✓	✓	
Miter corner extrusion and diffuser				✓				
Filling extrusion with polyurethane (2 ft submersible)								✓
Customize extrusion to specified color					✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓