




# Dublin Perforated Sheet Specifications



Specification grade, flexible LED sheet with minimal cutting increments

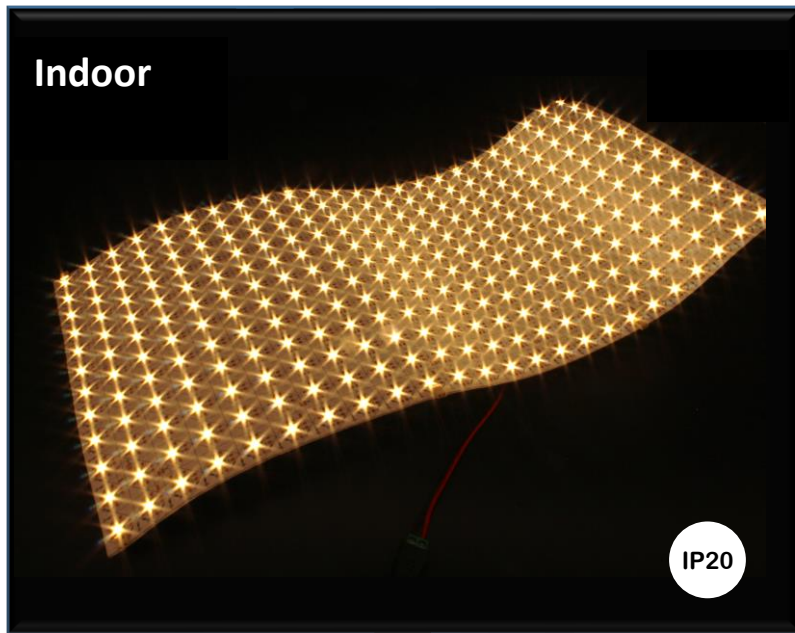



- Creates uniform illumination from very small distance
- Can be adhered with double sided adhesive or mechanical fasteners
- Can be field cut horizontally, vertically and diagonally (white only)
- Plug-and-play connectors on board for easy installation and connection



## Technical Information

Product	CCT	Output (lm/pc)	Output (lm/ft <sup>2</sup> )	LEDs/pc	Consump. (watt/pc)	Efficacy (lm/watt)	CRI	Voltage	Max # pcs	Cut increment	Dimension (per pc)
L2000	2700K	~ 2000	~ 1610	288	20W	100	>90	24V	4 pcs	0.79" x 0.79"	18.90" x 9.45" = 1.24 ft <sup>2</sup>
	3000K	~ 2000	~ 1610	288	20W	100	>90	24V	4 pcs	0.79" x 0.79"	18.90" x 9.45" = 1.24 ft <sup>2</sup>
	3500K	~ 2000	~ 1610	288	20W	100	>90	24V	4 pcs	0.79" x 0.79"	18.90" x 9.45" = 1.24 ft <sup>2</sup>
	4000K	~ 2000	~ 1610	288	20W	100	>90	24V	4 pcs	0.79" x 0.79"	18.90" x 9.45" = 1.24 ft <sup>2</sup>

# Dublin Perforated Sheet: Static White

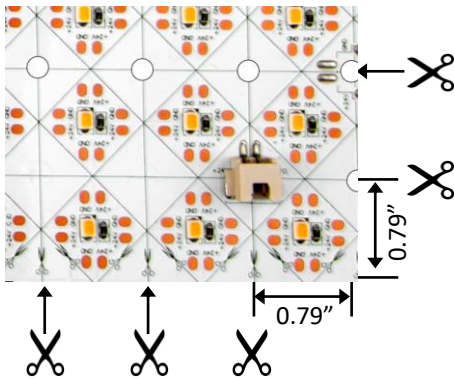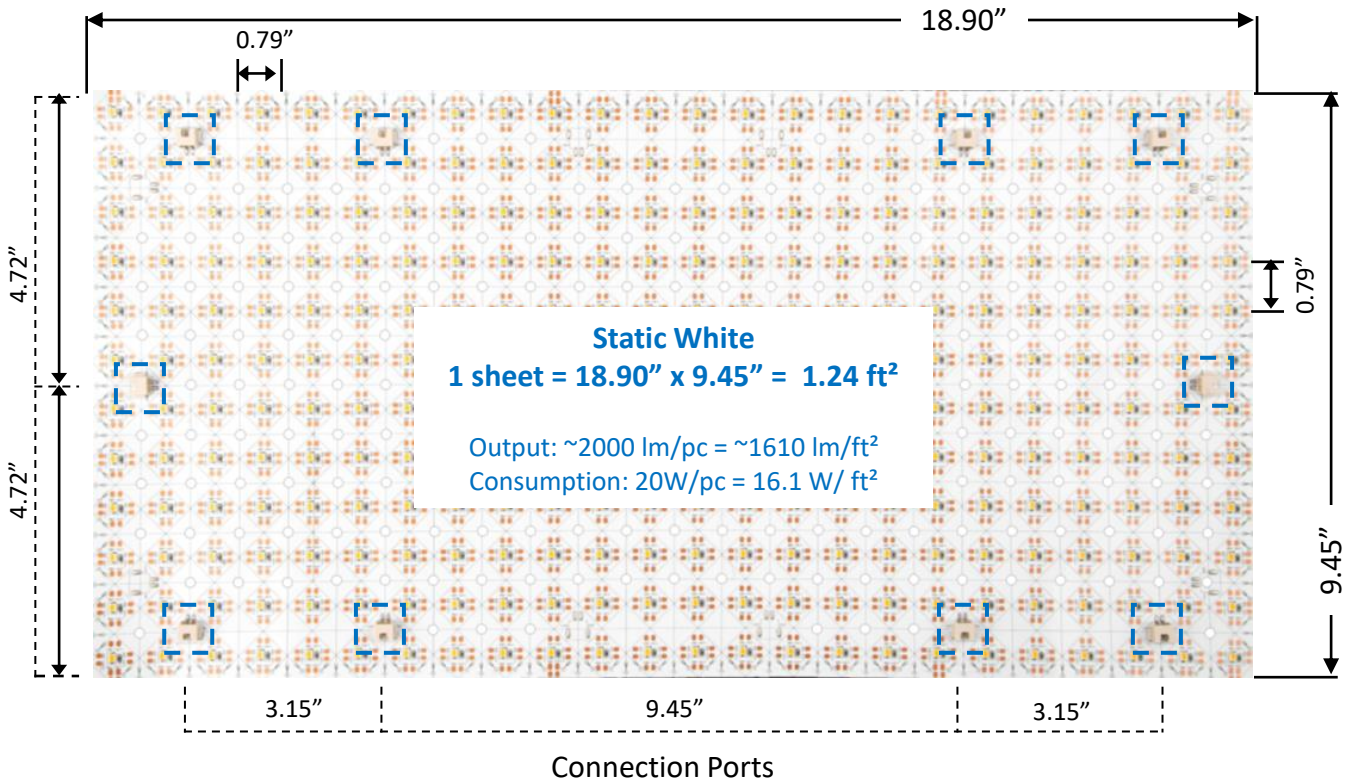

## Ordering Codes


**Example: DP-L2000IP20CT30-48"x12"**

(Dublin perforated, ~2000 lm/pc, Indoor, 3000K, 4 ft<sup>2</sup>)

Product Line	+	Output	+	IP Rating	+	Color Temp	+	Dimension
DP Dublin Perforated		L2000 ~ 2000 lm/pc		IP20 Indoor		CT27 2700k CT30 3000k CT35 3500k CT40 4000k		Enter length x width


## Static White Wiring Configuration

Maximum 4 sheets per driver

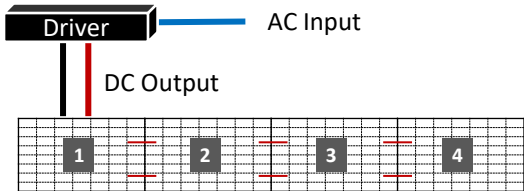


Multiple sheets per driver as long as maximum load is less than driver load

Example 1:

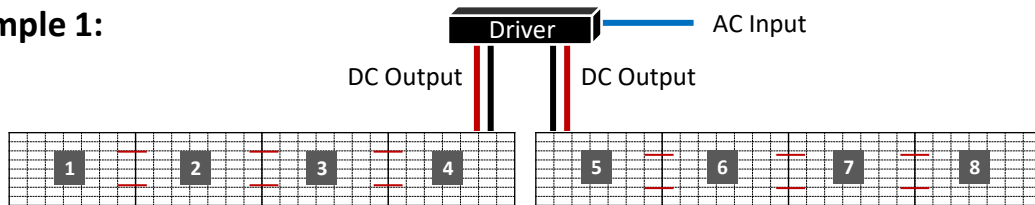

Example 2:

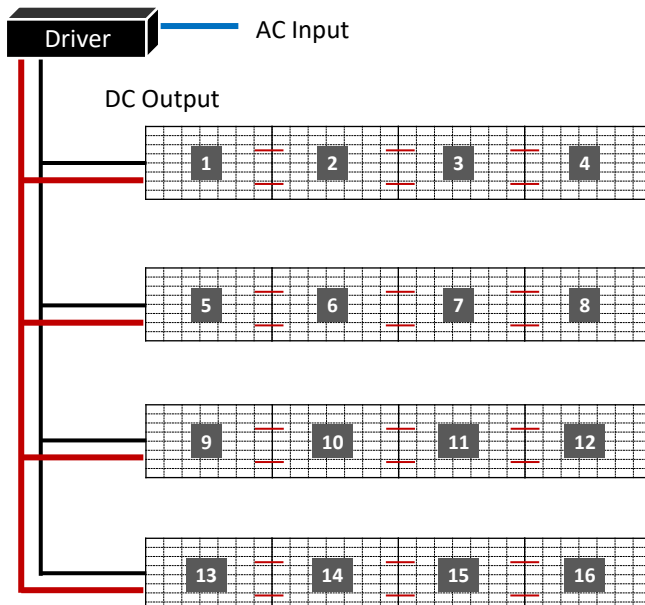

## Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67			
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION	
<b>NTR</b> Non-Dimming	<b>50</b> 50 Watt	<b>IP00</b> Indoor	88-264V	24V	3.90 x 3.82 x 1.42						
						<b>75</b> 75 Watt	5.08 x 3.82 x 1.50				
						<b>100</b> 100 Watt	6.26 x 3.82 x 1.50				
						<b>150</b> 150 Watt	7.84 x 3.85 x 1.50				
						<b>200</b> 200 Watt	8.46 x 4.53 x 1.18				
	<b>320</b> 320 Watt	<b>IP42</b> Indoor	90-264V	24V	3.03 x 1.57 x 1.14						
						<b>16</b> 16 Watt	3.03 x 1.57 x 1.14				
						<b>25</b> 25 Watt	3.31 x 2.24 x 1.16				
						<b>35</b> 35 Watt	3.31 x 2.24 x 1.16				
	<b>20</b> 20 Watt	<b>IP67</b> Outdoor	90-264V	24V	4.65 x 1.38 x 1.02						
						<b>35</b> 35 Watt	5.83 x 1.57 x 1.18				
						<b>60</b> 60 Watt	6.40 x 1.67 x 1.26				
						<b>100</b> 100 Watt	7.48 x 2.05 x 1.46				
						<b>150</b> 150 Watt	7.52 x 2.48 x 1.48				
						<b>240</b> 240 Watt	9.61 x 2.68 x 1.53				
<b>DTR</b> Dimming (0-10V)						<b>IP67</b> Outdoor	90-305V	24V	5.83 x 1.57 x 1.26		
										<b>16</b> 16 Watt	5.83 x 1.57 x 1.26
	<b>25</b> 25 Watt	6.40 x 1.70 x 1.26									
	<b>40</b> 40 Watt	6.40 x 1.70 x 1.26									
	<b>60</b> 60 Watt	6.40 x 1.70 x 1.26									
	<b>90</b> 90 Watt	6.34 x 2.40 x 1.42									
	<b>100</b> 100 Watt	8.66 x 2.68 x 1.53									
	<b>120</b> 120 Watt	8.66 x 2.68 x 1.53									
	<b>150</b> 150 Watt	8.97 x 2.68 x 1.58									
	<b>185</b> 185 Watt	8.97 x 2.68 x 1.58									
	<b>240</b> 240 Watt	9.88 x 2.68 x 1.58									
<b>320</b> 320 Watt	9.92 x 3.54 x 1.72										
<b>480</b> 480 Watt	10.32 x 4.92 x 1.72										
<b>600</b> 600 Watt	11.02 x 5.67 x 1.91										
<b>FPD</b> Dimming (Forward Phase)	<b>IP67</b> Outdoor	120V	24V	4.92 x 2.20 x 0.79							
					<b>20</b> 20 Watt	4.92 x 2.20 x 0.79					
					<b>40</b> 40 Watt	4.92 x 2.20 x 0.79					
					<b>60</b> 60 Watt	4.92 x 2.20 x 0.79					
					<b>75</b> 75 Watt	4.92 x 2.20 x 0.79					
					<b>96</b> 96 Watt	4.92 x 2.20 x 0.79					
<b>150</b> 150 Watt	9.24 x 3.00 x 2.74										