
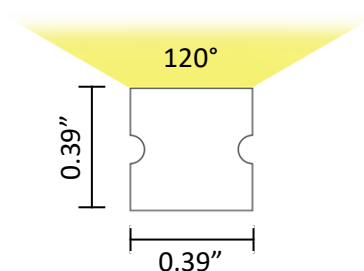


LWD10F – London Wave Top View




BEULUX

London Wave Dual bending is an improved Neon Flex replacement using latest LED technology and creates pixilation free light lines, straight or curved. Made from UV stabilized silicone. Mounts to the surface with mounting clips or aluminum extrusion.

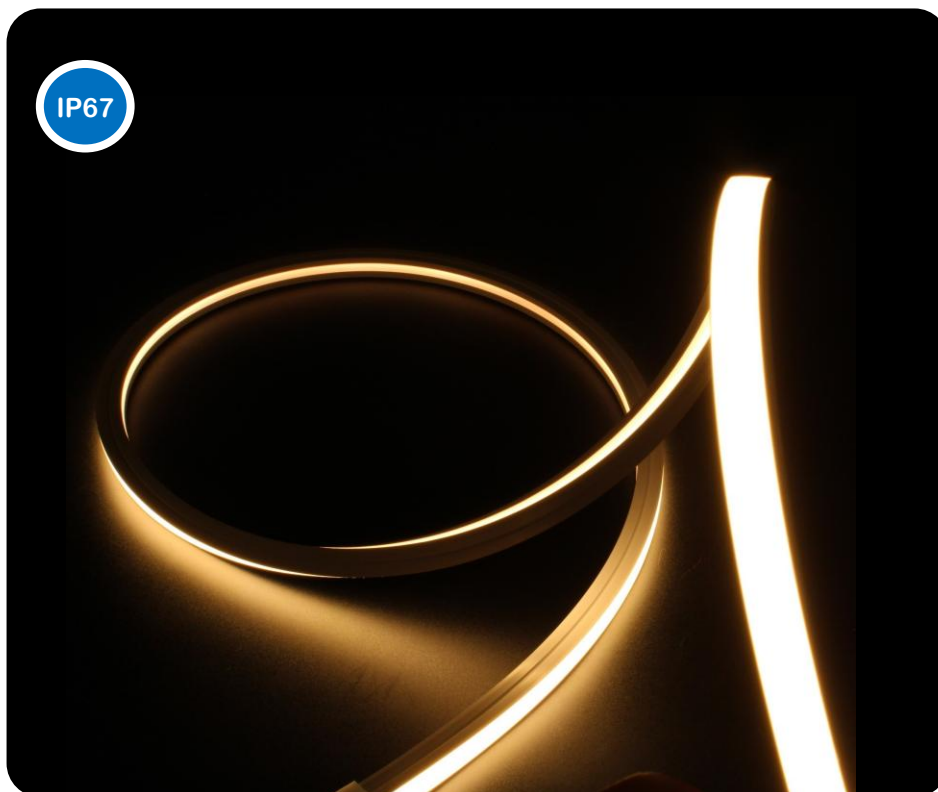

Bending Instruction

Min. Bending Diameter

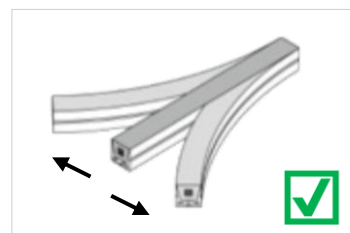

LWD10F – London Wave Top View



Technical Information:

Product	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Cut increment
150	2700K	~ 140	3.0 W	~ 45	>90	24V	16.4'	1.97"
	3000K	~ 150	3.0 W	~ 50	>90	24V	16.4'	1.97"
	3500K	~ 150	3.0 W	~ 50	>90	24V	16.4'	1.97"
	4000K	~ 155	3.0 W	~ 50	>90	24V	16.4'	1.97"
	5000K	~ 155	3.0 W	~ 50	>90	24V	16.4'	1.97"
	6000K	~ 150	3.0 W	~ 50	>90	24V	16.4'	1.97"
SR	Red	~ 50	3.0 W	~ 17	>90	24V	16.4'	1.97"
SG	Green	~ 135	3.0 W	~ 45	>90	24V	16.4'	1.97"
SB	Blue	~ 30	3.0 W	~ 10	>90	24V	16.4'	1.97"
SY	Yellow	~ 35	3.0 W	~ 10	>90	24V	16.4'	1.97"
SP	Pink	~ 115	3.0 W	~ 37	>90	24V	16.4'	1.97"
SO	Orange	~ 145	3.0 W	~ 15	>90	24V	16.4'	1.97"

Ordering Code

Example: LWD10F-15030-AL-DTR-16'-F


London Wave Dual View, ~150 lm/ft, 3000K,
Linear Extrusion, Dimming, 16 ft, Front cable entry

LWD10F	150	30	AL	DTR	16'	F
---------------	------------	-----------	-----------	------------	------------	----------


Model	Output	CCT	Accessories	Driver	Length	Cable Entry
LWD10F London Wave Dual View	150 ~ 150 lm/ft	27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 60 6000K	AL Aluminum Extrusion PC PC Extrusion	NTR Non-Dimming DTR Dimming 0-10V, to 10%	Enter run length	F Front S Side B Bottom
	SR Static Red SG Static Green SB Static Blue SY Static Yellow SP Static Pink SO Static Orange	N/A	FLX Flexible Extrusion MC1 Mounting Clip MC2 Mounting Clip	DUR Dimming 0-10V, to 1% FPD Dimming 1%-100%		

Compatible Accessories:


LWD10F-AL
Aluminum Extrusion

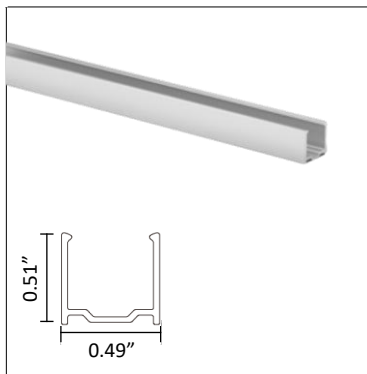

LWD10F-PC
PC Extrusion

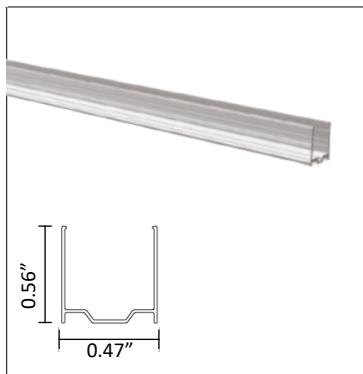


LWD10F-FLX
Mounting Clip

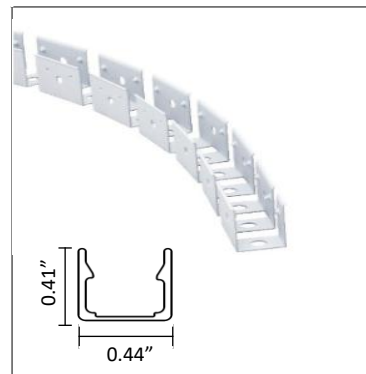



LWD10F-MC1
Mounting Clip




LWD10F-MC2
Stainless Steel Mounting Clip

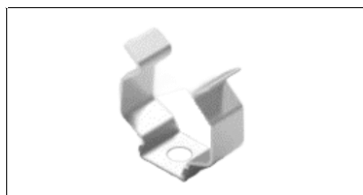

Cable Entry:



Power Supply Ordering Codes

DTR		+	60	+	IP67	DTR60IP67 - Dimming, 60 Watt, IP67		
MODEL		+	POWER	+	IP RATING	INPUT	OUTPUT	DIMENSION
NTR Non-Dimming [UL Recognized]			50 50 Watt		IP00 Indoor 	88-264V	24V	3.90 x 3.82 x 1.42
			75 75 Watt					5.08 x 3.82 x 1.50
			100 100 Watt					6.26 x 3.82 x 1.50
			150 150 Watt					7.84 x 3.85 x 1.50
			200 200 Watt					8.46 x 4.53 x 1.18
			320 320 Watt					8.46 x 4.53 x 1.18
			750 750 Watt					9.84 x 5.00 x 1.61
			960 960 Watt					11.60 x 5.00 x 1.61
			12 12 Watt		IP42 Indoor 	90-264V	24V	3.03 x 1.57 x 1.14
			16 16 Watt					3.03 x 1.57 x 1.14
			25 25 Watt					3.31 x 2.24 x 1.16
			35 35 Watt					3.31 x 2.24 x 1.16
			20 20 Watt		IP67 Outdoor 	90-264V	24V	4.65 x 1.38 x 1.02
			35 35 Watt					5.83 x 1.57 x 1.18
			60 60 Watt					6.40 x 1.67 x 1.26
			100 100 Watt					7.48 x 2.05 x 1.46
			150 150 Watt					7.52 x 2.48 x 1.48
			240 240 Watt					9.61 x 2.68 x 1.53
			320 320 Watt					9.92 x 3.54 x 1.72
DTR Dimming min 10% (0-10V) [UL Recognized]			16 16 Watt		IP30 Indoor	90-305V	24V	5.83 x 1.57 x 1.26
			25 25 Watt		IP67 Outdoor  	90-305V	24V	5.83 x 1.57 x 1.26
			40 40 Watt					6.40 x 1.70 x 1.26
			60 60 Watt					6.40 x 1.70 x 1.26
			90 90 Watt					6.34 x 2.40 x 1.42
			96 96 Watt					8.66 x 2.68 x 1.53
			120 120 Watt					8.66 x 2.68 x 1.53
			150 150 Watt					8.97 x 2.68 x 1.58
			185 185 Watt					8.97 x 2.68 x 1.58
			240 240 Watt					9.88 x 2.68 x 1.58
			320 320 Watt					9.92 x 3.54 x 1.72
FPD Dimming min 1% (Forward Phase) [UL Recognized]			480 480 Watt					10.32 x 4.92 x 1.72
			600 600 Watt					11.02 X 5.67 X 1.91
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20 20 Watt		IP67 Outdoor 	120V	24V	4.92 x 2.20 x 0.79
			40 40 Watt					4.92 x 2.20 x 0.79
			60 60 Watt					4.92 x 2.20 x 0.79
			75 75 Watt					4.92 x 2.20 x 0.79
			96 96 Watt					4.92 x 2.20 x 0.79
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20 20 Watt		IP14 Outdoor 	120V	24V	5.60 x 2.00 x 2.14
			40 40 Watt					5.60 x 2.00 x 2.14
			60 60 Watt					6.62 x 2.58 x 2.33
			96 96 Watt					6.62 x 2.58 x 2.33
			150 150 Watt					9.80 x 3.00 x 2.74
			200 200 Watt					9.80 x 3.00 x 2.74
			300 300 Watt					10.07 x 4.20 x 3.50