






LWD12F – London Wave Dual View

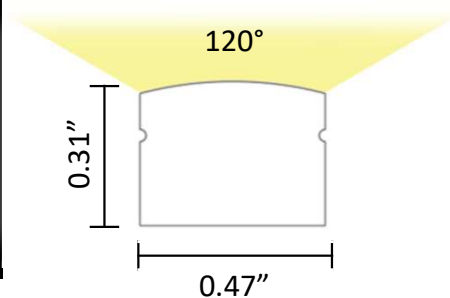

London Wave Dual Bending horizontally and vertically is an improved Neon Flex replacement using latest LED technology and creates pixilation free, uniform light lines, straight or curved. Made from UV-resistant silicone. The 120° wide light distribution ensures optimal direct and lateral coverage.. Compatible with LED aluminum extrusions to create seamless linear fixtures or direct surface-mounting using included metal clips.



Bending Instruction

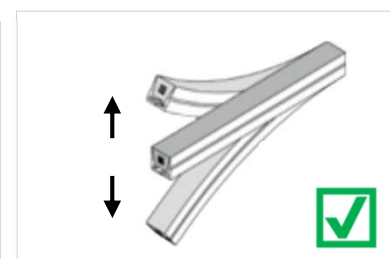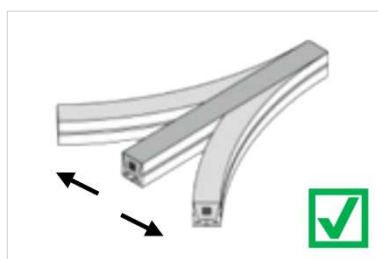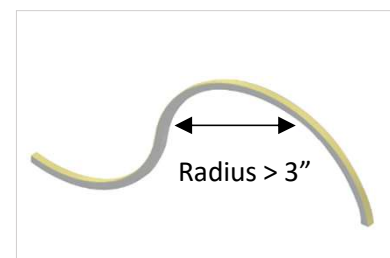

LWD12F – London Wave Dual View



Technical Information:

Product	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Cut increment
335	2400K	~ 335	4.4 W	~ 76	>90	24V	16.4'	1.64"
	2700K	~ 335	4.4 W	~ 76	>90	24V	16.4'	1.64"
	3000K	~ 335	4.4 W	~ 76	>90	24V	16.4'	1.64"
	3500K	~ 335	4.4 W	~ 76	>90	24V	16.4'	1.64"
	4000K	~ 335	4.4 W	~ 76	>90	24V	16.4'	1.64"
	5000K	~ 335	4.4 W	~ 76	>90	24V	16.4'	1.64"
	6000K	~ 335	4.4 W	~ 76	>90	24V	16.4'	1.64"

Accessories:

LWD12-AL

Aluminum Extrusion



LWS12-MC

Mounting Clip



Example: LWD12F-33530-AL-DUD-F-16'

London Wave Dual View, ~335 lm/ft, 3000K, Linear Extrusion, Dimming, 16 ft, Front Cable

Ordering Code

LWD12F	150	30	AL	DUD	16'	F
Model	Output	CCT	Accessories	Driver	Length	Cable Entry
LWD12F London Wave Dual View	335 ~ 335 lm/ft	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 60 6000K	AL Aluminum Extrusion MC Mounting Clip	NTR Non-Dimming DUD Dimming 0.1%-100% Triac/0-10V/ 10V PWM/ Potentiometer FPD Dimming 1%-100%	Enter run length	F Front S Side B Bottom

Power Supply Ordering Codes

DUD		+	60		+	IP65		DUD60IP65 - Dimming, 60 Watt, IP65		
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION
NTR	Non-Dimming		50	50 Watt		IP00	Indoor	88-264V	24V	3.90 x 3.82 x 1.42
			75	75 Watt						5.08 x 3.82 x 1.50
			100	100 Watt						6.26 x 3.82 x 1.50
			150	150 Watt						7.84 x 3.85 x 1.50
			200	200 Watt						8.46 x 4.53 x 1.18
			320	320 Watt						8.46 x 4.53 x 1.18
			750	750 Watt						9.84 x 5.00 x 1.61
			960	960 Watt						11.60 x 5.00 x 1.61
			12	12 Watt		IP42	Indoor	90-264V	24V	3.03 x 1.57 x 1.14
			16	16 Watt						3.03 x 1.57 x 1.14
			25	25 Watt						3.31 x 2.24 x 1.16
			35	35 Watt						3.31 x 2.24 x 1.16
						IP67	Outdoor	90-264V	24V	
			20	20 Watt						4.65 x 1.38 x 1.02
			35	35 Watt						5.83 x 1.57 x 1.18
			60	60 Watt						6.40 x 1.67 x 1.26
			100	100 Watt						7.48 x 2.05 x 1.46
			150	150 Watt						7.52 x 2.48 x 1.48
			240	240 Watt						9.61 x 2.68 x 1.53
			320	320 Watt						9.92 x 3.54 x 1.72
DUD	Dimming 0.1%-100%		18	18 Watt		IP65	Outdoor	110-277V	24V	5.04 x 2.09 x 0.83
			24	24 Watt						5.04 x 2.09 x 0.83
			36	36 Watt						5.98 x 2.32 x 0.83
			48	48 Watt						5.98 x 2.32 x 0.83
			60	60 Watt						5.98 x 2.32 x 0.83
			80	80 Watt						7.17 x 2.32 x 0.83
	Universal: Triac/0-10V/ 10V PWM/ Potentiometer		96	96 Watt						7.16 x 2.48 x 1.49
			120	120 Watt						7.16 x 2.48 x 1.49
			150	150 Watt						9.92 x 2.48 x 1.49
			200	200 Watt						9.92 x 2.48 x 1.49
			300	300 Watt						12.1 x 2.48 x 1.49
FPD	Dimming min 1% (Forward Phase)		40	40 Watt		IP67	Outdoor	120V	24V	4.92 x 2.20 x 0.79
			60	60 Watt						4.92 x 2.20 x 0.79
			75	75 Watt						4.92 x 2.20 x 0.79
			96	96 Watt						4.92 x 2.20 x 0.79
FPD	Dimming min 1% (Forward Phase) with junction box		20	20 Watt		IP14	Indoor	120V	24V	5.60 x 2.00 x 2.14
			40	40 Watt						5.60 x 2.00 x 2.14
			60	60 Watt						6.62 x 2.58 x 2.33
			96	96 Watt						6.62 x 2.58 x 2.33
			150	150 Watt						9.80 x 3.00 x 2.74
			200	200 Watt						9.80 x 3.00 x 2.74
			300	300 Watt						10.07 x 4.20 x 3.50