





LWD12F – London Wave Dual View



London Wave Dual Bending horizontally and vertically is an improved Neon Flex replacement using latest LED technology and creates pixilation free, uniform light lines, straight or curved. Made from UV-resistant silicone. The 120° light output provides direct as well as lateral light. Can be used with aluminum extrusions for straight lines and also mounts to the surface with mounting clips.

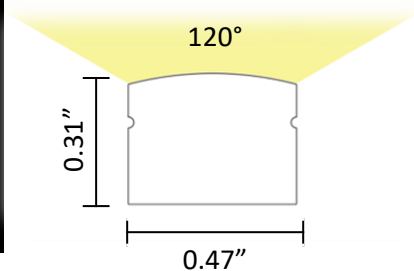

Bending Instruction

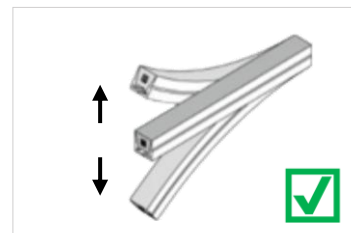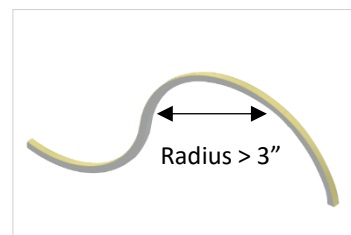

LWD12F – London Wave Dual View



Technical Information:

Product	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Cut increment
335	2400K	~ 335	4.4	120	>90	24V	16.4'	1.64"
	2700K	~ 335	4.4	120	>90	24V	16.4'	1.64"
	3000K	~ 335	4.4	128	>90	24V	16.4'	1.64"
	3500K	~ 335	4.4	130	>90	24V	16.4'	1.64"
	4000K	~ 335	4.4	135	>90	24V	16.4'	1.64"

Accessories:

LWD12-AL

Aluminum Extrusion



LWS12-MC

Mounting Clip



Ordering Code


Example: **LWD12F-33530-AL-DTR-16'**

London Wave Dual View, ~335 lm/ft, 3000K, Linear Extrusion, Dimming, 16 ft

LWD12F	150	30	AL	DTR	16'	F
---------------	------------	-----------	-----------	------------	------------	----------

Model	Output	CCT	Accessories	Driver	Length	Cable Entry
LWD12F London Wave Dual View	335 ~ 335 lm/ft	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K 50 5000K 60 6000K	AL Aluminum Extrusion MC Mounting Clip	NTR Non-Dimming DTR Dimming 0-10V, to 10% DUR Dimming 0-10V, to 1% FPD Dimming 1%-100%	Enter run length	F Front S Side B Bottom

Power Supply Ordering Codes

DTR		+	60	+	IP67	DTR60IP67 - Dimming, 60 Watt, IP67		
MODEL		+	POWER	+	IP RATING	INPUT	OUTPUT	DIMENSION
NTR Non-Dimming [UL Recognized]			50 50 Watt		IP00 Indoor 	88-264V	24V	3.90 x 3.82 x 1.42
			75 75 Watt					5.08 x 3.82 x 1.50
			100 100 Watt					6.26 x 3.82 x 1.50
			150 150 Watt					7.84 x 3.85 x 1.50
			200 200 Watt					8.46 x 4.53 x 1.18
			320 320 Watt					8.46 x 4.53 x 1.18
			750 750 Watt					9.84 x 5.00 x 1.61
			960 960 Watt					11.60 x 5.00 x 1.61
			12 12 Watt		IP42 Indoor 	90-264V	24V	3.03 x 1.57 x 1.14
			16 16 Watt					3.03 x 1.57 x 1.14
			25 25 Watt					3.31 x 2.24 x 1.16
			35 35 Watt					3.31 x 2.24 x 1.16
			20 20 Watt		IP67 Outdoor 	90-264V	24V	4.65 x 1.38 x 1.02
			35 35 Watt					5.83 x 1.57 x 1.18
			60 60 Watt					6.40 x 1.67 x 1.26
			100 100 Watt					7.48 x 2.05 x 1.46
			150 150 Watt					7.52 x 2.48 x 1.48
			240 240 Watt					9.61 x 2.68 x 1.53
			320 320 Watt					9.92 x 3.54 x 1.72
DTR Dimming min 10% (0-10V) [UL Recognized]			16 16 Watt		IP30 Indoor	90-305V	24V	5.83 x 1.57 x 1.26
			25 25 Watt		IP67 Outdoor  	90-305V	24V	5.83 x 1.57 x 1.26
			40 40 Watt					6.40 x 1.70 x 1.26
			60 60 Watt					6.40 x 1.70 x 1.26
			90 90 Watt					6.34 x 2.40 x 1.42
			96 96 Watt					8.66 x 2.68 x 1.53
			120 120 Watt					8.66 x 2.68 x 1.53
			150 150 Watt					8.97 x 2.68 x 1.58
			185 185 Watt					8.97 x 2.68 x 1.58
			240 240 Watt					9.88 x 2.68 x 1.58
			320 320 Watt					9.92 x 3.54 x 1.72
FPD Dimming min 1% (Forward Phase) [UL Recognized]			480 480 Watt					10.32 x 4.92 x 1.72
			600 600 Watt					11.02 x 5.67 x 1.91
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20 20 Watt		IP67 Outdoor 	120V	24V	4.92 x 2.20 x 0.79
			40 40 Watt					4.92 x 2.20 x 0.79
			60 60 Watt					4.92 x 2.20 x 0.79
			75 75 Watt					4.92 x 2.20 x 0.79
			96 96 Watt					4.92 x 2.20 x 0.79
			20 20 Watt		IP14 Outdoor 	120V	24V	5.60 x 2.00 x 2.14
			40 40 Watt					5.60 x 2.00 x 2.14
			60 60 Watt					6.62 x 2.58 x 2.33
			96 96 Watt					6.62 x 2.58 x 2.33
			150 150 Watt					9.80 x 3.00 x 2.74
			200 200 Watt					9.80 x 3.00 x 2.74
			300 300 Watt					10.07 x 4.20 x 3.50