






LWD12F3 – London Wave Dual View

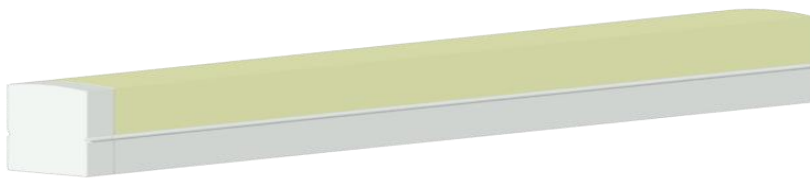

London Wave Dual Bending horizontally and vertically is an improved Neon Flex replacement using latest LED technology and creates pixilation free, uniform light lines, straight or curved. Made from UV-resistant silicone. The 180° light output provides direct as well as lateral light. Can be used with aluminum extrusions for straight lines and also mounts to the surface with mounting clips.



Bending Instruction

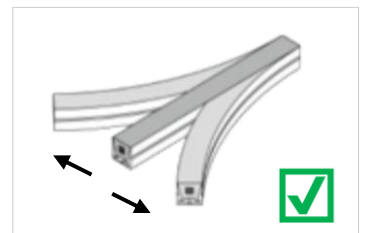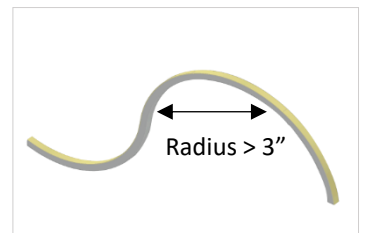


LWD12F3 – London Wave Dual View



Technical Information:

Product	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Cut increment
365	2400K	~ 365	4.4 W	~ 83	>90	24V	16.4'	1.64"
	2700K	~ 365	4.4 W	~ 83	>90	24V	16.4'	1.64"
	3000K	~ 365	4.4 W	~ 83	>90	24V	16.4'	1.64"
	3500K	~ 365	4.4 W	~ 83	>90	24V	16.4'	1.64"
	4000K	~ 365	4.4 W	~ 83	>90	24V	16.4'	1.64"
	5000K	~ 365	4.4 W	~ 83	>90	24V	16.4'	1.64"
	6000K	~ 365	4.4 W	~ 83	>90	24V	16.4'	1.64"

Accessories:



Ordering Code







Example: LWD12F3-36530-AL-DUD-16'-F

London Wave Dual View, ~365 lm/ft, 3000K, Linear Extrusion, Dimming, 16 ft, Front cable entry

LWD12F	150	30	AL	DUD	16'	F
---------------	------------	-----------	-----------	------------	------------	----------

Model	Output	CCT	Accessories	Driver	Length	Cable Entry
LWD12F3 London Wave Dual View	365 ~ 365 lm/ft	24 2400K	AL Aluminum Extrusion	NTR Non-Dimming	Enter run length	F Front S Side B Bottom
		27 2700K				
		30 3000K	MC Mounting Clip	DUD Dimming 0.1%-100% Triac/0-10V/ 10V PWM/ Potentiometer		
		35 3500K				
		40 4000K				
		50 5000K				
		60 6000K				
			FPD Dimming 1%-100%			

Power Supply Ordering Codes

DUD		+	60		+	IP65		DUD60IP65 - Dimming, 60 Watt, IP65								
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION						
NTR Non-Dimming		+	50	50 Watt	+	IP00 Indoor		88-264V	24V	3.90 x 3.82 x 1.42						
			75	75 Watt						5.08 x 3.82 x 1.50						
			100	100 Watt						6.26 x 3.82 x 1.50						
			150	150 Watt						7.84 x 3.85 x 1.50						
			200	200 Watt						8.46 x 4.53 x 1.18						
			320	320 Watt						8.46 x 4.53 x 1.18						
			750	750 Watt						9.84 x 5.00 x 1.61						
			960	960 Watt						11.60 x 5.00 x 1.61						
			12	12 Watt						+	IP42 Indoor		90-264V	24V	3.03 x 1.57 x 1.14	
			16	16 Watt											3.03 x 1.57 x 1.14	
			25	25 Watt											3.31 x 2.24 x 1.16	
			35	35 Watt											3.31 x 2.24 x 1.16	
		+	20	20 Watt	+	IP67 Outdoor		90-264V	24V	4.65 x 1.38 x 1.02						
				35						35 Watt	5.83 x 1.57 x 1.18					
				60						60 Watt	6.40 x 1.67 x 1.26					
				100						100 Watt	7.48 x 2.05 x 1.46					
				150						150 Watt	7.52 x 2.48 x 1.48					
				240						240 Watt	9.61 x 2.68 x 1.53					
				320						320 Watt	9.92 x 3.54 x 1.72					
				DUD Dimming 0.1%-100%						Universal: Triac/0-10V/ 10V PWM/ Potentiometer	+	18	18 Watt	+	IP65 Outdoor	
24	24 Watt	5.04 x 2.09 x 0.83														
36	36 Watt	5.98 x 2.32 x 0.83														
48	48 Watt	5.98 x 2.32 x 0.83														
60	60 Watt	5.98 x 2.32 x 0.83														
80	80 Watt	7.17 x 2.32 x 0.83														
96	96 Watt	7.16 x 2.48 x 1.49														
120	120 Watt	7.16 x 2.48 x 1.49														
150	150 Watt	9.92 x 2.48 x 1.49														
200	200 Watt	9.92 x 2.48 x 1.49														
300	300 Watt	12.1 x 2.48 x 1.49														
FPD Dimming min 1% (Forward Phase)		+	40		40 Watt	+	IP67 Outdoor		120V			24V	4.92 x 2.20 x 0.79			
			60	60 Watt	4.92 x 2.20 x 0.79											
			75	75 Watt	4.92 x 2.20 x 0.79											
			96	96 Watt	4.92 x 2.20 x 0.79											
FPD Dimming min 1% (Forward Phase) with junction box		+	20	20 Watt	+	IP14 Indoor		120V	24V	5.60 x 2.00 x 2.14						
			40	40 Watt						5.60 x 2.00 x 2.14						
			60	60 Watt						6.62 x 2.58 x 2.33						
			96	96 Watt						6.62 x 2.58 x 2.33						
			150	150 Watt						9.80 x 3.00 x 2.74						
			200	200 Watt						9.80 x 3.00 x 2.74						
300	300 Watt	10.07 x 4.20 x 3.50														