





LWD16F – London Wave Dual View

BEULUX

London Wave Dual Bending horizontally and vertically is an improved Neon Flex replacement using latest LED technology and creates pixilation free, uniform light lines, straight or curved. Made from UV-resistant silicone. The 120° light output provides direct as well as lateral light. Can be used with aluminum extrusions for straight lines or with the flexible extrusion to keep curves exactly as desired. Also mounts to the surface with mounting clips.



Bending Instruction

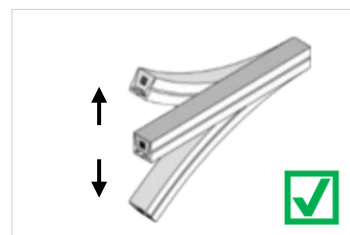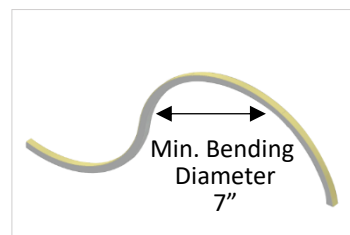

Technical Information:

Product	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Cut increment
115	2100K	~ 95	~ 1.5 W	~ 61	>90	24V	16.4'	1.97"
	2400K	~ 105	~ 1.5 W	~ 70	>90	24V	16.4'	1.97"
	2700K	~ 105	~ 1.5 W	~ 70	>90	24V	16.4'	1.97"
	3000K	~ 110	~ 1.5 W	~ 71	>90	24V	16.4'	1.97"
	3500K	~ 115	~ 1.5 W	~ 75	>90	24V	16.4'	1.97"
	4000K	~ 120	~ 1.5 W	~ 78	>90	24V	16.4'	1.97"
	5000K	~ 120	~ 1.5 W	~ 78	>90	24V	16.4'	1.97"
	6000K	~ 120	~ 1.5 W	~ 78	>90	24V	16.4'	1.97"
225	2100K	~ 185	~ 3.0 W	~ 61	>90	24V	16.4'	1.97"
	2400K	~ 205	~ 3.0 W	~ 70	>90	24V	16.4'	1.97"
	2700K	~ 205	~ 3.0 W	~ 70	>90	24V	16.4'	1.97"
	3000K	~ 215	~ 3.0 W	~ 71	>90	24V	16.4'	1.97"
	3500K	~ 225	~ 3.0 W	~ 75	>90	24V	16.4'	1.97"
	4000K	~ 230	~ 3.0 W	~ 78	>90	24V	16.4'	1.97"
	5000K	~ 235	~ 3.0 W	~ 78	>90	24V	16.4'	1.97"
	6000K	~ 235	~ 3.0 W	~ 78	>90	24V	16.4'	1.97"
SR	Red	Red	~ 3.0 W	N/A	N/A	24V	16.4'	1.97"
SG	Green	Green	~ 3.0 W	N/A	N/A	24V	16.4'	1.97"
SB	Blue	Blue	~ 3.0 W	N/A	N/A	24V	16.4'	1.97"
SY	Yellow	Yellow	~ 3.0 W	N/A	N/A	24V	16.4'	1.97"
SP	Pink	Pink	~ 3.0 W	N/A	N/A	24V	16.4'	1.97"
SO	Orange	Orange	~ 3.0 W	N/A	N/A	24V	16.4'	1.97"

LWD16F – London Wave Dual View

BEULUX

Ordering Code

Example: LWD16F-22530-AL-DTR-16'-F

London Wave Dual View, ~225 lm/ft, 3000K,
Linear Extrusion, Dimming, 16 ft, Front cable entry


LWD16F	225	30	AL	DTR	16'	F
--------	-----	----	----	-----	-----	---

Model	Output	CCT	Accessories	Driver	Length	Cable Entry
LWD16F	115 ~ 115 lm/ft	21 2100K	AL	NTR	Enter	F Front
London Wave	225 ~ 225 lm/ft	24 2400K	Aluminum	Non-Dimming	run	S Side
Dual View		27 2700K	Extrusion		length	B Bottom
		30 3000K		DTR Dimming		
		35 3500K	PC	0-10V, to 10%		
		40 4000K	PC Extrusion			
		50 5000K		DUR		
		60 6000K	FLX	Dimming		
			Flexible	0-10V, to 1%		
			Extrusion			
			MC1	FPD Dimming		
			Mounting Clip	1%-100%		
			MC2			
			Mounting Clip			
	SR Static Red	N/A				
	SG Static Green					
	SB Static Blue					
	SY Static Yellow					
	SP Static Pink					
	SO Static Orange					

Compatible Accessories:


LWD16F-AL

Aluminum Extrusion




LWD16F-PC

PC Extrusion




LWD16F-FLX

Mounting Clip



LWD16F-MC / MCS


Mounting Clip



Cable Entry:



Power Supply Ordering Codes

DTR		+	60	+	IP67	DTR60IP67 - Dimming, 60 Watt, IP67		
MODEL		+	POWER	+	IP RATING	INPUT	OUTPUT	DIMENSION
NTR Non-Dimming [UL Recognized]			50 50 Watt		IP00 Indoor 	88-264V	24V	3.90 x 3.82 x 1.42
			75 75 Watt					5.08 x 3.82 x 1.50
			100 100 Watt					6.26 x 3.82 x 1.50
			150 150 Watt					7.84 x 3.85 x 1.50
			200 200 Watt					8.46 x 4.53 x 1.18
			320 320 Watt					8.46 x 4.53 x 1.18
			750 750 Watt					9.84 x 5.00 x 1.61
			960 960 Watt					11.60 x 5.00 x 1.61
			12 12 Watt		IP42 Indoor 	90-264V	24V	3.03 x 1.57 x 1.14
			16 16 Watt					3.03 x 1.57 x 1.14
			25 25 Watt					3.31 x 2.24 x 1.16
			35 35 Watt					3.31 x 2.24 x 1.16
			20 20 Watt		IP67 Outdoor 	90-264V	24V	4.65 x 1.38 x 1.02
			35 35 Watt					5.83 x 1.57 x 1.18
			60 60 Watt					6.40 x 1.67 x 1.26
			100 100 Watt					7.48 x 2.05 x 1.46
			150 150 Watt					7.52 x 2.48 x 1.48
			240 240 Watt					9.61 x 2.68 x 1.53
			320 320 Watt					9.92 x 3.54 x 1.72
DTR Dimming min 10% (0-10V) [UL Recognized]			16 16 Watt		IP30 Indoor	90-305V	24V	5.83 x 1.57 x 1.26
			25 25 Watt		IP67 Outdoor  	90-305V	24V	5.83 x 1.57 x 1.26
			40 40 Watt					6.40 x 1.70 x 1.26
			60 60 Watt					6.40 x 1.70 x 1.26
			90 90 Watt					6.34 x 2.40 x 1.42
			96 96 Watt					8.66 x 2.68 x 1.53
			120 120 Watt					8.66 x 2.68 x 1.53
			150 150 Watt					8.97 x 2.68 x 1.58
			185 185 Watt					8.97 x 2.68 x 1.58
			240 240 Watt					9.88 x 2.68 x 1.58
			320 320 Watt					9.92 x 3.54 x 1.72
			480 480 Watt					10.32 x 4.92 x 1.72
			600 600 Watt					11.02 X 5.67 X 1.91
FPD Dimming min 1% (Forward Phase) [UL Recognized]			20 20 Watt		IP67 Outdoor 	120V	24V	4.92 x 2.20 x 0.79
			40 40 Watt					4.92 x 2.20 x 0.79
			60 60 Watt					4.92 x 2.20 x 0.79
			75 75 Watt					4.92 x 2.20 x 0.79
			96 96 Watt					4.92 x 2.20 x 0.79
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20 20 Watt		IP14 Outdoor 	120V	24V	5.60 x 2.00 x 2.14
			40 40 Watt					5.60 x 2.00 x 2.14
			60 60 Watt					6.62 x 2.58 x 2.33
			96 96 Watt					6.62 x 2.58 x 2.33
			150 150 Watt					9.80 x 3.00 x 2.74
			200 200 Watt					9.80 x 3.00 x 2.74
			300 300 Watt					10.07 x 4.20 x 3.50