


LWT10F – London Wave Top View






London Wave is an improved Neon Flex replacement using latest LED technology and creates pixilation free light lines, straight or curved. Made from UV stabilized silicone. Mounts to the surface with mounting clips or aluminum extrusion.



- Waterproof IP67**
- LM-80 Compliant**
- 3 Step MacAdam**
- UV Protected**
- CRI 90+**
- UL LISTED**
- RoHS**

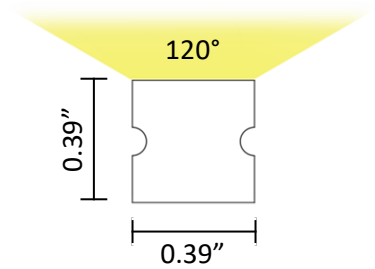

Bending Instruction

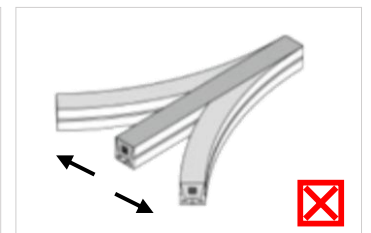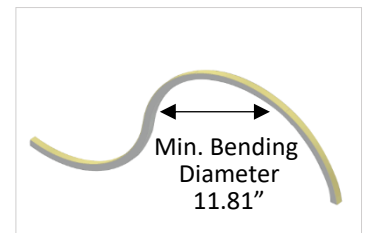

LWT10F – London Wave Top View




Technical Information:

Product Group	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
130	2400K	~ 125	2.7 W	~ 46	>90	24V	16'	1.5"
	2700K	~ 125	2.7 W	~ 46	>90	24V	16'	1.5"
	3000K	~ 130	2.7 W	~ 47	>90	24V	16'	1.5"
	3500K	~ 130	2.7 W	~ 47	>90	24V	16'	1.5"
	4000K	~ 135	2.7 W	~ 49	>90	24V	16'	1.5"

Compatible Accessories:


LWT10F-AL

Aluminum Extrusion

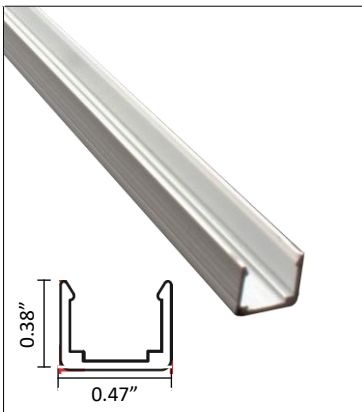


LWT10F-FLX

Flexible Extrusion

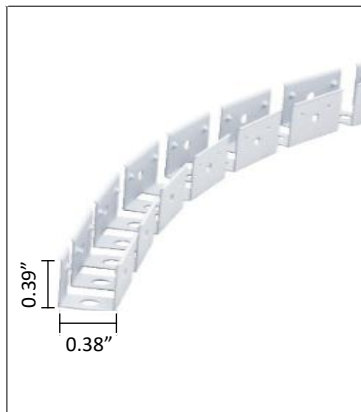

LWT10F-MC

Mounting Clip

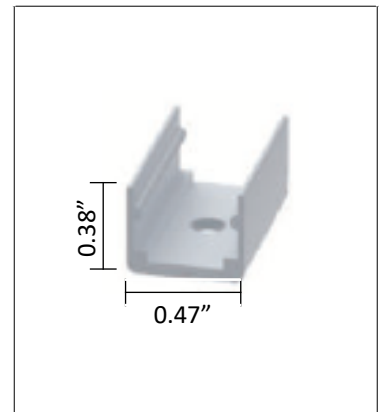

Ordering Code

Example: LWT10F-13030-AL-DTR-16'

London Wave Top View, ~130 lm/ft, 3000K, Linear Extrusion, Dimming, 16 ft








LWT10F	-	150	-	30	-	AL	-	DTR	-	16'
---------------	---	------------	---	-----------	---	-----------	---	------------	---	------------

Model	+	Output	+	CCT	+	Accessories	+	Driver	+	Length
LWT10F		130	~ 130 lm/ft	24	2400K	AL		NTR		Enter length
London Wave				27	2700K	Linear Extrusion		Non-Dimming		
Top View				30	3000K					
				35	3500K	FLX		DTR	Dimming	
				40	4000K	Flexible Extrusion		10%-0-10V		
						MC		DUR	Dimming	
						Mounting Clip		1%-0-10V		
								FPD	Dimming	
								0.1%-0-10V		

LWT10F – London Wave Top View



Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67									
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION							
NTR Non-Dimming [UL Recognized]			50	50 Watt		IP00 Indoor		88-264V	24V	3.90 x 3.82 x 1.42							
			75	75 Watt						5.08 x 3.82 x 1.50							
			100	100 Watt						6.26 x 3.82 x 1.50							
			150	150 Watt						7.84 x 3.85 x 1.50							
			200	200 Watt						8.46 x 4.53 x 1.18							
			320	320 Watt						8.46 x 4.53 x 1.18							
			750	750 Watt						9.84 x 5.00 x 1.61							
			960	960 Watt						11.60 x 5.00 x 1.61							
			12	12 Watt							IP42 Indoor		90-264V	24V	3.03 x 1.57 x 1.14		
			16	16 Watt											3.03 x 1.57 x 1.14		
		25	25 Watt	3.31 x 2.24 x 1.16													
		35	35 Watt	3.31 x 2.24 x 1.16													
		20	20 Watt		IP67 Outdoor		90-264V	24V	4.65 x 1.38 x 1.02								
		35	35 Watt						5.83 x 1.57 x 1.18								
		60	60 Watt						6.40 x 1.67 x 1.26								
		100	100 Watt						7.48 x 2.05 x 1.46								
		150	150 Watt						7.52 x 2.48 x 1.48								
		240	240 Watt						9.61 x 2.68 x 1.53								
		320	320 Watt	9.92 x 3.54 x 1.72													
DTR Dimming min 10% (0-10V) [UL Recognized]			16	16 Watt		IP30 Indoor		90-305V	24V	5.83 x 1.57 x 1.26							
			25	25 Watt							IP67 Outdoor		90-305V	24V	5.83 x 1.57 x 1.26		
			40	40 Watt											6.40 x 1.70 x 1.26		
			60	60 Watt											6.40 x 1.70 x 1.26		
			90	90 Watt											6.34 x 2.40 x 1.42		
			96	96 Watt											8.66 x 2.68 x 1.53		
			120	120 Watt											8.66 x 2.68 x 1.53		
			150	150 Watt											8.97 x 2.68 x 1.58		
			185	185 Watt											8.97 x 2.68 x 1.58		
			240	240 Watt											9.88 x 2.68 x 1.58		
		320	320 Watt	9.92 x 3.54 x 1.72													
		480	480 Watt	10.32 x 4.92 x 1.72													
		600	600 Watt	11.02 X 5.67 X 1.91													
FPD Dimming min 1% (Forward Phase) [UL Recognized]			20	20 Watt		IP67 Outdoor		120V	24V	4.92 x 2.20 x 0.79							
			40	40 Watt						4.92 x 2.20 x 0.79							
			60	60 Watt						4.92 x 2.20 x 0.79							
			75	75 Watt						4.92 x 2.20 x 0.79							
			96	96 Watt						4.92 x 2.20 x 0.79							
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20	20 Watt		IP14 Outdoor		120V	24V	5.60 x 2.00 x 2.14							
			40	40 Watt						5.60 x 2.00 x 2.14							
			60	60 Watt						6.62 x 2.58 x 2.33							
			96	96 Watt						6.62 x 2.58 x 2.33							
			150	150 Watt						9.80 x 3.00 x 2.74							
			200	200 Watt						9.80 x 3.00 x 2.74							
		300	300 Watt	10.07 x 4.20 x 3.50													