






LWT12F3 – London Wave Top View

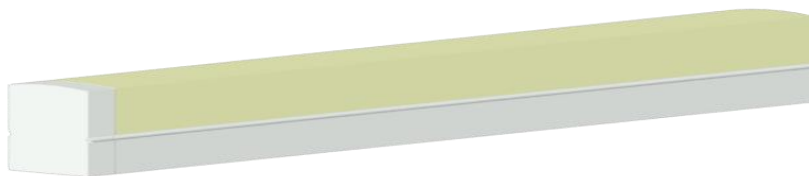

London Wave is an improved Neon Flex replacement using latest LED technology and creates pixilation free light lines, straight or curved. Made from UV stabilized silicone. Mounts to the surface with mounting clips or aluminum extrusion.



Bending Instruction

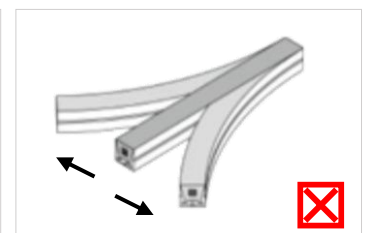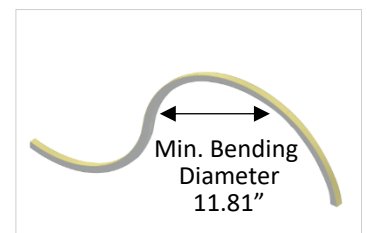

LWT12F3 – London Wave Top View



Technical Information:

Product Group	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
140	2400K	~ 130	2.3 W	~ 57	>90	24V	32'	1.97"
	2700K	~ 135	2.3 W	~ 59	>90	24V	32'	1.97"
	3000K	~ 135	2.3 W	~ 59	>90	24V	32'	1.97"
	3500K	~ 140	2.3 W	~ 61	>90	24V	32'	1.97"
	4000K	~ 145	2.3 W	~ 63	>90	24V	32'	1.97"
230	2400K	~ 200	4.3 W	~ 47	>90	24V	26'	1.97"
	2700K	~ 215	4.3 W	~ 50	>90	24V	26'	1.97"
	3000K	~ 220	4.3 W	~ 52	>90	24V	26'	1.97"
	3500K	~ 230	4.3 W	~ 54	>90	24V	26'	1.97"
	4000K	~ 235	4.3 W	~ 55	>90	24V	26'	1.97"
305	2400K	~ 270	4.4 W	~ 62	>90	24V	32'	1.97"
	2700K	~ 290	4.4 W	~ 66	>90	24V	32'	1.97"
	3000K	~ 295	4.4 W	~ 67	>90	24V	32'	1.97"
	3500K	~ 305	4.4 W	~ 69	>90	24V	32'	1.97"
	4000K	~ 310	4.4 W	~ 71	>90	24V	32'	1.97"


LWT12F3 – London Wave Top View



Compatible Accessories:

LWT12F3-AL

Aluminum Extrusion

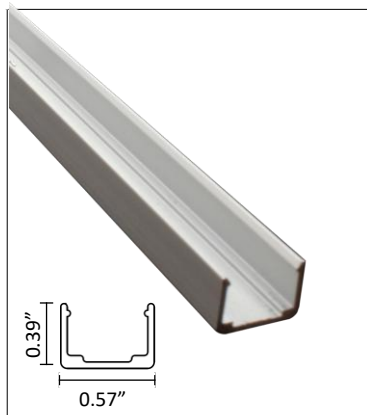


LWT12F3-FLX

Flexible Extrusion



LWT12F3-MC

Mounting Clip

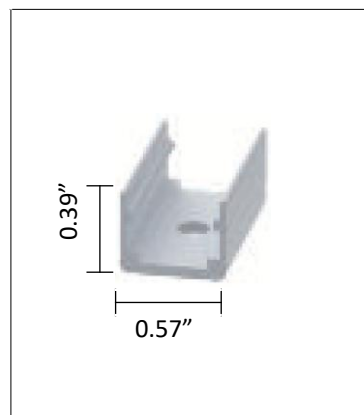

Ordering Code


Example: **LWT12F3-23030-AL-DTR-16'**

London Wave Top View, ~230 lm/ft, 3000K, Linear Extrusion, Dimming, 16 ft

LWS12F3	-	280	-	30	-	AL	-	DTR	-	16'
---------	---	-----	---	----	---	----	---	-----	---	-----

Model	+	Output	+	CCT	+	Accessories	+	Driver	+	Length
LWT12F3		140	~ 140 lm/ft	24	2400K	AL		NTR		Enter
London Wave		230	~ 230 lm/ft	27	2700K	Linear Extrusion		Non-Dimming		length
Top View		305	~ 305 lm/ft	30	3000K					
				35	3500K	FLX		DTR		
				40	4000K	Flexible Extrusion		Dimming		
								10%-0-10V		
						MC		DUR		
						Mounting Clip		Dimming		
								1%-0-10V		
								FPD		
								Dimming		
								0.1%-0-10V		

Power Supply Ordering Codes

DTR		+	60	+	IP67	DTR60IP67 - Dimming, 60 Watt, IP67		
MODEL		+	POWER	+	IP RATING	INPUT	OUTPUT	DIMENSION
NTR Non-Dimming [UL Recognized]			50 50 Watt		IP00 Indoor 	88-264V	24V	3.90 x 3.82 x 1.42
			75 75 Watt					5.08 x 3.82 x 1.50
			100 100 Watt					6.26 x 3.82 x 1.50
			150 150 Watt					7.84 x 3.85 x 1.50
			200 200 Watt					8.46 x 4.53 x 1.18
			320 320 Watt					8.46 x 4.53 x 1.18
			750 750 Watt					9.84 x 5.00 x 1.61
			960 960 Watt					11.60 x 5.00 x 1.61
			12 12 Watt		IP42 Indoor 	90-264V	24V	3.03 x 1.57 x 1.14
			16 16 Watt					3.03 x 1.57 x 1.14
			25 25 Watt					3.31 x 2.24 x 1.16
			35 35 Watt					3.31 x 2.24 x 1.16
			20 20 Watt		IP67 Outdoor 	90-264V	24V	4.65 x 1.38 x 1.02
			35 35 Watt					5.83 x 1.57 x 1.18
			60 60 Watt					6.40 x 1.67 x 1.26
			100 100 Watt					7.48 x 2.05 x 1.46
			150 150 Watt					7.52 x 2.48 x 1.48
			240 240 Watt					9.61 x 2.68 x 1.53
			320 320 Watt					9.92 x 3.54 x 1.72
DTR Dimming min 10% (0-10V) [UL Recognized]			16 16 Watt		IP30 Indoor	90-305V	24V	5.83 x 1.57 x 1.26
			25 25 Watt		IP67 Outdoor  	90-305V	24V	5.83 x 1.57 x 1.26
			40 40 Watt					6.40 x 1.70 x 1.26
			60 60 Watt					6.40 x 1.70 x 1.26
			90 90 Watt					6.34 x 2.40 x 1.42
			96 96 Watt					8.66 x 2.68 x 1.53
			120 120 Watt					8.66 x 2.68 x 1.53
			150 150 Watt					8.97 x 2.68 x 1.58
			185 185 Watt					8.97 x 2.68 x 1.58
			240 240 Watt					9.88 x 2.68 x 1.58
			320 320 Watt					9.92 x 3.54 x 1.72
FPD Dimming min 1% (Forward Phase) [UL Recognized]			480 480 Watt					10.32 x 4.92 x 1.72
			600 600 Watt					11.02 X 5.67 X 1.91
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]			20 20 Watt		IP67 Outdoor 	120V	24V	4.92 x 2.20 x 0.79
			40 40 Watt					4.92 x 2.20 x 0.79
			60 60 Watt					4.92 x 2.20 x 0.79
			75 75 Watt					4.92 x 2.20 x 0.79
			96 96 Watt					4.92 x 2.20 x 0.79
			20 20 Watt		IP14 Outdoor 	120V	24V	5.60 x 2.00 x 2.14
			40 40 Watt					5.60 x 2.00 x 2.14
			60 60 Watt					6.62 x 2.58 x 2.33
			96 96 Watt					6.62 x 2.58 x 2.33
			150 150 Watt					9.80 x 3.00 x 2.74
			200 200 Watt					9.80 x 3.00 x 2.74
			300 300 Watt					10.07 x 4.20 x 3.50