






LWT16F – London Wave Top View

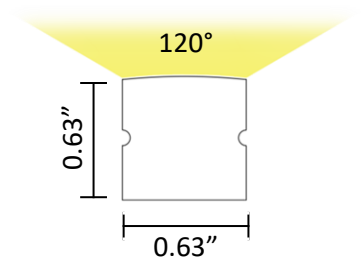

London Wave is an improved Neon Flex replacement using latest LED technology and creates pixilation free light lines, straight or curved. Made from UV stabilized silicone. Mounts to the surface with mounting clips or aluminum extrusion.

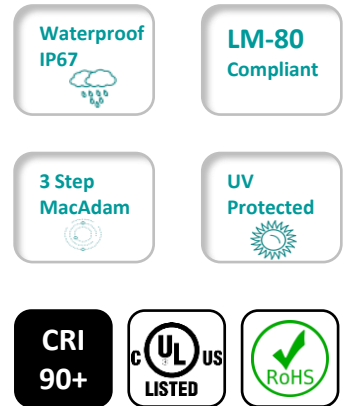

Bending Instruction

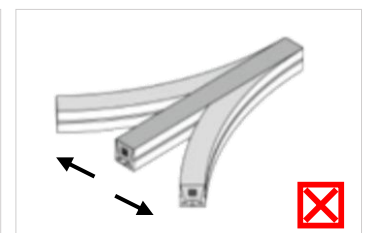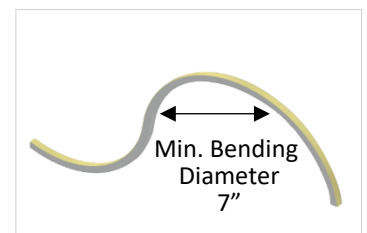

Technical Information:

Product Group	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
100	2400K	~ 85	2.4 W	~ 35	>90	24V	32'	1"
	2700K	~ 90	2.4 W	~ 38	>90	24V	32'	1"
	3000K	~ 95	2.4 W	~ 40	>90	24V	32'	1"
	3500K	~ 100	2.4 W	~ 42	>90	24V	32'	1"
	4000K	~ 105	2.4 W	~ 44	>90	24V	32'	1"
180	2400K	~ 165	4.1 W	~ 40	>90	24V	26'	1"
	2700K	~ 170	4.1 W	~ 41	>90	24V	26'	1"
	3000K	~ 180	4.1 W	~ 44	>90	24V	26'	1"
	3500K	~ 185	4.1 W	~ 45	>90	24V	26'	1"
	4000K	~ 190	4.1 W	~ 46	>90	24V	26'	1"
265	2400K	~ 220	5.5 W	~ 40	>90	24V	23'	1"
	2700K	~ 235	5.5 W	~ 43	>90	24V	23'	1"
	3000K	~ 255	5.5 W	~ 46	>90	24V	23'	1"
	3500K	~ 265	5.5 W	~ 48	>90	24V	23'	1"
	4000K	~ 275	5.5 W	~ 49	>90	24V	23'	1"
SR	Red	Red	6.0 W	N/A	N/A	24V	16'	1"
SG	Green	Green	6.0 W	N/A	N/A	24V	16'	1"
SB	Blue	Blue	6.0 W	N/A	N/A	24V	16'	1"
SY	Yellow	Yellow	6.0 W	N/A	N/A	24V	16'	1"
RGB	RGB	RGB	5.0 W	N/A	N/A	24V	16'	1"
RGBW	RGBW	RGBW	7.0 W	N/A	N/A	24V	16'	1.97"
TW1865	1800K-6500K	~ 140-180	5.9 W	~ 24-30	>90	24V	16'	1.97"
TW2740	2700K-4000K	~ 95-190	5.8 W	~ 16-33	>90	24V	16'	1.97"
Dim-to-warm	2100-3000K	~ 70-75	4.4 W	~ 15-17	>90	24V	16'	1.97"


LWT16F – London Wave Top View



Compatible Accessories:


LWT16F-AL

Aluminum Extrusion

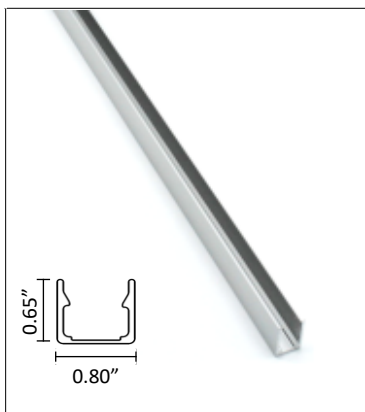


LWT16F-FLX

Flexible Extrusion

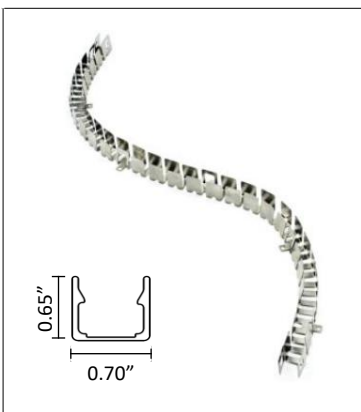

LWT16F-MC

Mounting Clip

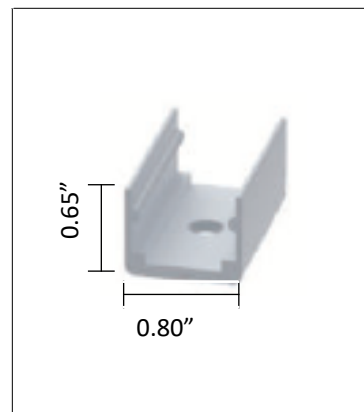

Ordering Code

Example: LWT16F-18530-AL-DTR-16'

London Wave Top View, ~185 lm/ft, 3000K, Linear Extrusion, Dimming, 16 ft

LWT16F	-	185	-	30	-	AL	-	DTR	-	16'
Model	+	Output	+	CCT	+	Accessories	+	Driver	+	Length
LWT16F		100 ~ 100 lm/ft		24 2400K		AL		NTR		Enter length
London Wave		180 ~ 185 lm/ft		27 2700K		Linear		Non-Dimming		
Top View		265 ~ 265 lm/ft		30 3000K		Extrusion		DTR Dimming		
				35 3500K				10%-0-10V		
				40 4000K		FLX		DUR		
						Flexible		Dimming		
		SR Static Red		N/A		Extrusion		1%-0-10V		
		SG Static Green								
		SB Static Blue				MC				
		SY Static Yellow				Mounting				
						Clip		FPD Dimming		
		RGB RGB		N/A				0.1%-0-10V		
		RGBW RGBW								
		TW Tunable White		1865 1800k-6500K						
				2740 2700k-4000K						
		DTW Dim-To-Warm		2130 2100k-3000K						

Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67		
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION
NTR	Non-Dimming [UL Recognized]		50	50 Watt		IP00	Indoor	88-264V	24V	3.90 x 3.82 x 1.42
			75	75 Watt						5.08 x 3.82 x 1.50
			100	100 Watt						6.26 x 3.82 x 1.50
			150	150 Watt						7.84 x 3.85 x 1.50
			200	200 Watt						8.46 x 4.53 x 1.18
			320	320 Watt						8.46 x 4.53 x 1.18
			750	750 Watt						9.84 x 5.00 x 1.61
			960	960 Watt						11.60 x 5.00 x 1.61
			12	12 Watt		IP42	Indoor	90-264V	24V	3.03 x 1.57 x 1.14
			16	16 Watt						3.03 x 1.57 x 1.14
			25	25 Watt						3.31 x 2.24 x 1.16
			35	35 Watt						3.31 x 2.24 x 1.16
						IP67	Outdoor	90-264V	24V	4.65 x 1.38 x 1.02
			20	20 Watt						5.83 x 1.57 x 1.18
			35	35 Watt						6.40 x 1.67 x 1.26
			60	60 Watt						7.48 x 2.05 x 1.46
			100	100 Watt						7.52 x 2.48 x 1.48
			150	150 Watt						9.61 x 2.68 x 1.53
			240	240 Watt						9.92 x 3.54 x 1.72
			320	320 Watt						
DTR	Dimming min 10% (0-10V) [UL Recognized]		16	16 Watt		IP30	Indoor	90-305V	24V	5.83 x 1.57 x 1.26
			25	25 Watt		IP67	Outdoor	90-305V	24V	5.83 x 1.57 x 1.26
			40	40 Watt						6.40 x 1.70 x 1.26
			60	60 Watt						6.40 x 1.70 x 1.26
			90	90 Watt						6.34 x 2.40 x 1.42
			96	96 Watt						8.66 x 2.68 x 1.53
			120	120 Watt						8.66 x 2.68 x 1.53
			150	150 Watt						8.97 x 2.68 x 1.58
			185	185 Watt						8.97 x 2.68 x 1.58
			240	240 Watt						9.88 x 2.68 x 1.58
			320	320 Watt						9.92 x 3.54 x 1.72
			480	480 Watt						10.32 x 4.92 x 1.72
			600	600 Watt						11.02 x 5.67 x 1.91
DUR	Dimming min 0.1% (Triac 0-10V) [UL Listed]		20	20 Watt		IP20	Indoor	100-305V	24V	4.92 x 2.20 x 0.79
			96	30 Watt		IP67	Indoor	100-305V 120-277V	24V	7.64 x 2.25 x 1.46
			40	20 Watt						11.1 x 1.18 x 0.79
			200	30 Watt						10.16 x 3.07 x 1.89
FPD	Dimming min 1% (Forward Phase) [UL Recognized]		20	20 Watt		IP67	Outdoor	120V	24V	4.92 x 2.20 x 0.79
			40	40 Watt						4.92 x 2.20 x 0.79
			60	60 Watt						4.92 x 2.20 x 0.79
			75	75 Watt						4.92 x 2.20 x 0.79
			96	96 Watt						4.92 x 2.20 x 0.79
FPD	Dimming min 1% (Forward Phase) with junction box [ETL Listed]		20	20 Watt		IP14	Outdoor	120V	24V	5.60 x 2.00 x 2.14
			40	40 Watt						5.60 x 2.00 x 2.14
			60	60 Watt						6.62 x 2.58 x 2.33
			96	96 Watt						6.62 x 2.58 x 2.33
			150	150 Watt						9.80 x 3.00 x 2.74
			200	200 Watt						9.80 x 3.00 x 2.74
			300	300 Watt						10.07 x 4.20 x 3.50