
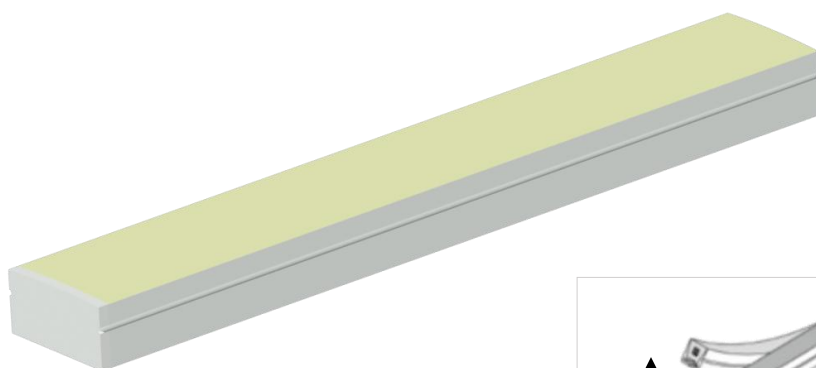





LWT50F – London Wave Top View View

BEULUX

London Wave is an improved Neon Flex replacement using latest LED technology and creates pixilation free light lines, straight or curved. Made from UV stabilized silicone. Mounts to the surface with mounting clips or aluminum extrusion.

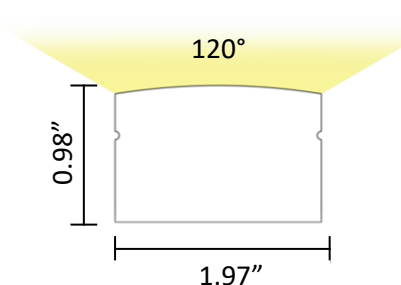

Bending Instruction



LWT50F – London Wave Top View



Technical Information:

Model	CCT	Output (lm/ft)	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
LWT50F	2700K	~ 260	5.0 W	~ 52	>95	24V	32'	1.0"
	3000K	~ 260	5.0 W	~ 52	>95	24V	32'	1.0"
	3500K	~ 260	5.0 W	~ 52	>95	24V	32'	1.0"
	4000K	~ 260	5.0 W	~ 52	>95	24V	32'	1.0"
	RGBW	RGBW	7.0 W	N/A	N/A	24V	16'	1.97"

Ordering Code

Example: LWT50F-26030-AL-DUD-16'

London Wave Top View 50F, ~260 lm/ft, 3000K,
Linear Extrusion, Dimming, 16 ft, Front cable entry

LWT50F	260	30	AL	DUD	16'	F

Model	Output	CCT	Accessories	Driver	Length	Cable Entry
LWT50F London Wave Top View	260 ~ 260 lm/ft	24 2400K	AL	NTR	Enter run length	F Front
		27 2700K	Linear	Non-Dimming		S Side
		30 3000K	Extrusion			B Bottom
		35 3500K		DUD Dimming		
		40 4000K	FLX	0.1%-100%		
	RGBW RGBW	N/A	Flexible	Triac/0-10V/ 10V PWM/ Potentiometer		
			Extrusion			
			MC			
			Mounting Clip	FPD Dimming		
				1%-100%		

Compatible Accessories:

Aluminum Extrusion




LWT50F-AL

Flexible Extrusion



LWT50F-FLX


Mounting Clip

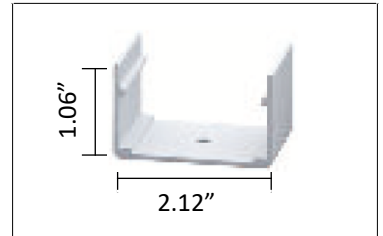

LWT50F-MC

Cable Entry:

Front

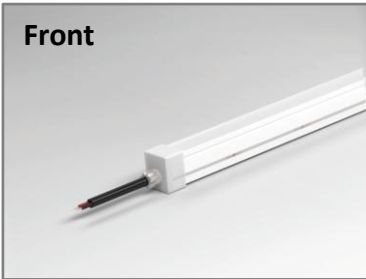

Side



Bottom



Power Supply Ordering Codes

DUD		+	60		+	IP65		DUD60IP65 - Dimming, 60 Watt, IP65		
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION
NTR	Non-Dimming		50	50 Watt		IP00	Indoor	88-264V	24V	3.90 x 3.82 x 1.42
			75	75 Watt						5.08 x 3.82 x 1.50
			100	100 Watt						6.26 x 3.82 x 1.50
			150	150 Watt						7.84 x 3.85 x 1.50
			200	200 Watt						8.46 x 4.53 x 1.18
			320	320 Watt						8.46 x 4.53 x 1.18
			750	750 Watt						9.84 x 5.00 x 1.61
			960	960 Watt						11.60 x 5.00 x 1.61
			12	12 Watt		IP42	Indoor	90-264V	24V	3.03 x 1.57 x 1.14
			16	16 Watt						3.03 x 1.57 x 1.14
			25	25 Watt						3.31 x 2.24 x 1.16
			35	35 Watt						3.31 x 2.24 x 1.16
						IP67	Outdoor	90-264V	24V	4.65 x 1.38 x 1.02
			20	20 Watt						5.83 x 1.57 x 1.18
			35	35 Watt						6.40 x 1.67 x 1.26
			60	60 Watt						7.48 x 2.05 x 1.46
			100	100 Watt						7.52 x 2.48 x 1.48
			150	150 Watt						9.61 x 2.68 x 1.53
			240	240 Watt						9.92 x 3.54 x 1.72
			320	320 Watt						
DUD	Dimming 0.1%-100%		18	18 Watt		IP65	Outdoor	110-277V	24V	5.04 x 2.09 x 0.83
			24	24 Watt						5.04 x 2.09 x 0.83
			36	36 Watt						5.98 x 2.32 x 0.83
			48	48 Watt						5.98 x 2.32 x 0.83
	Universal: Triac/0-10V/ 10V PWM/ Potentiometer		60	60 Watt						5.98 x 2.32 x 0.83
			80	80 Watt						7.17 x 2.32 x 0.83
			96	96 Watt						7.16 x 2.48 x 1.49
			120	120 Watt						7.16 x 2.48 x 1.49
			150	150 Watt						9.92 x 2.48 x 1.49
			200	200 Watt						9.92 x 2.48 x 1.49
			300	300 Watt						12.1 x 2.48 x 1.49
FPD	Dimming min 1% (Forward Phase)		40	40 Watt		IP67	Outdoor	120V	24V	4.92 x 2.20 x 0.79
			60	60 Watt						4.92 x 2.20 x 0.79
			75	75 Watt						4.92 x 2.20 x 0.79
			96	96 Watt						4.92 x 2.20 x 0.79
FPD	Dimming min 1% (Forward Phase) with junction box		20	20 Watt		IP14	Indoor	120V	24V	5.60 x 2.00 x 2.14
			40	40 Watt						5.60 x 2.00 x 2.14
			60	60 Watt						6.62 x 2.58 x 2.33
			96	96 Watt						6.62 x 2.58 x 2.33
			150	150 Watt						9.80 x 3.00 x 2.74
			200	200 Watt						9.80 x 3.00 x 2.74
			300	300 Watt						10.07 x 4.20 x 3.50