

Regrazer – Specification

The Regrazer is a small cove grazer that **grazes surfaces up to 40’ height**. The inner geometry along with using latest CSP chip technology and glare-reducing optics make this fixture outstanding in both performance and glare protection. Can be mounted directly to ceilings or by using the bracket accessory for wall mounting. Fixture can be cut on site.



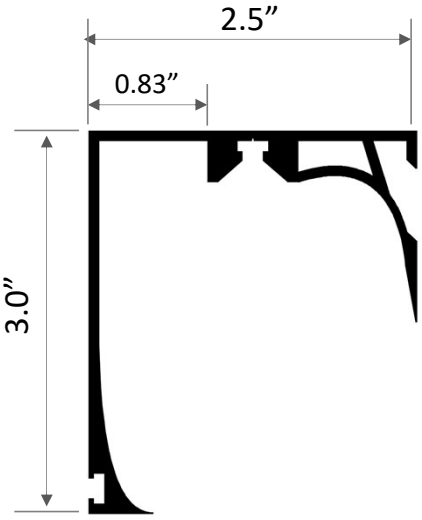

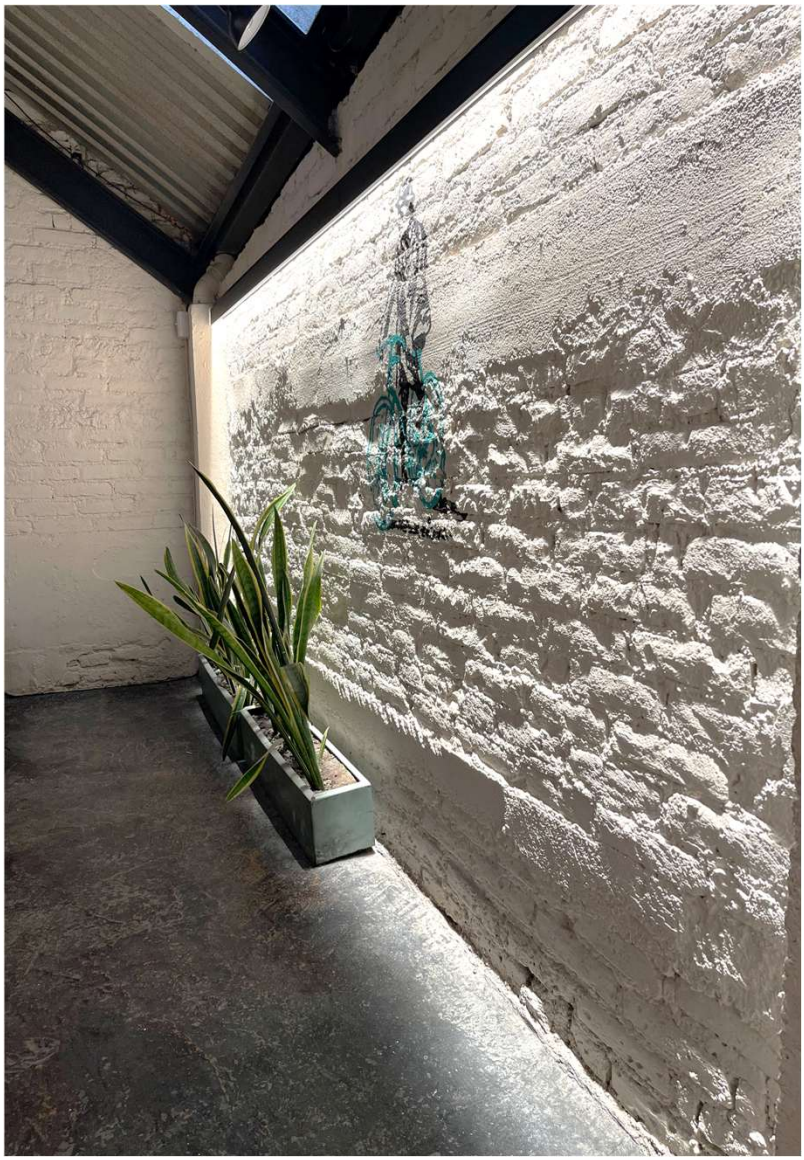

IP67 | CRI 90+ | cULus LISTED | RoHS | CE

Product Detail:

Material:	Extruded Aluminum
Colors:	Black, Silver, White
Dimension (in):	L 78.74” x W 2.5” x H 3.0”
Customization:	Cut to specified length

Applications:

- Regressed
- Office
- Hallways
- Outdoors
- Lobbies
- Grazing

Regrazer – Technical Data

Technical Information

Other Color Temperature available upon request

Model	CCT	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Min Cut
RG-D10	2400K	~ 510	14	6.0 W	~ 90	>90	24V	32'	5.93”
	2700K	~ 520	14	6.0 W	~ 90	>90	24V	32'	5.93”
	3000K	~ 540	14	6.0 W	~ 90	>90	24V	32'	5.93”
	3500K	~ 570	14	6.0 W	~ 95	>90	24V	32'	5.93”
	4000K	~ 575	14	6.0 W	~ 95	>90	24V	32'	5.93”
	RGBW	~ 310	14	6.0 W	N/A	N/A	24V	32'	5.93”


Ordering Code

Example: RG-D1027-CB-BR-DUD-16’-W-RC
Regrazer, 2700K, Black, Bracket, Dimming, 16 ft, Wall Grazing/Regressed Ceiling

RG-D10	27	CB	BR	DUD	16’	W-RC
Model	**CCT**	**Finished**	**Accessories**	**Driver**	**Length**	**Installation**
RG-D10 Regrazer	**24** 2400K **27** 2700K **30** 3000K **35** 3500K **40** 4000K **RGBW**	**CB** Black **CS** Silver **CW** White	**BR** Bracket **GF** Grid Flange **MIF** Mud-In Flange **LC** Linear Connector	**NTR** Non-Dimming **DUD** Dimming 0.1%-100% Triac/0-10V/ 10V PWM/ Potentiometer **FPD** Dimming (Forward Phase) 1%-100% **FPD-JB** Dimming (Forward Phase) w/ Junction Box 1%-100%	Enter run length	**Wall Grazing** **W-SM** Surface Mount **W-RC** Regressed Ceiling **W-RD-MI** Regressed Drywall **W-RD-GF** Regressed Drywall **W-WM** Wall Mount **W-WMD** Wall Mount Drywall **W-IU** Inground Up **Ceiling Grazing** **C-WM** Wall Mount **Ground Grazing** **G-GO** Ground Out


Power Supply Ordering Codes


DUD	+	60	+	IP65	DUD60IP65 - Dimming, 60 Watt, IP65

MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION
NTR	Non-Dimming		50	50 Watt		IP00	Indoor	88-264V	24V	3.90 x 3.82 x 1.42
			75	75 Watt						5.08 x 3.82 x 1.50
			100	100 Watt						6.26 x 3.82 x 1.50
			150	150 Watt						7.84 x 3.85 x 1.50
			200	200 Watt						8.46 x 4.53 x 1.18
			320	320 Watt						8.46 x 4.53 x 1.18
			750	750 Watt						9.84 x 5.00 x 1.61
			960	960 Watt						11.60 x 5.00 x 1.61
			12	12 Watt		IP42	Indoor	90-264V	24V	3.03 x 1.57 x 1.14
			16	16 Watt						3.03 x 1.57 x 1.14
			25	25 Watt						3.31 x 2.24 x 1.16
			35	35 Watt						3.31 x 2.24 x 1.16
			20	20 Watt		IP67	Outdoor	90-264V	24V	4.65 x 1.38 x 1.02
			35	35 Watt						5.83 x 1.57 x 1.18
			60	60 Watt						6.40 x 1.67 x 1.26
			100	100 Watt						7.48 x 2.05 x 1.46
			150	150 Watt						7.52 x 2.48 x 1.48
			240	240 Watt						9.61 x 2.68 x 1.53
			320	320 Watt						9.92 x 3.54 x 1.72
DUD	Dimming 0.1%-100% Universal: Triac/0-10V/ 10V PWM/ Potentiometer		18	18 Watt		IP65	Outdoor	110-277V	24V	5.04 x 2.09 x 0.83
			24	24 Watt						5.04 x 2.09 x 0.83
			36	36 Watt						5.98 x 2.32 x 0.83
			48	48 Watt						5.98 x 2.32 x 0.83
			60	60 Watt						5.98 x 2.32 x 0.83
			80	80 Watt						7.17 x 2.32 x 0.83
			96	96 Watt						7.16 x 2.48 x 1.49
			120	120 Watt						7.16 x 2.48 x 1.49
			150	150 Watt						9.92 x 2.48 x 1.49
			200	200 Watt						9.92 x 2.48 x 1.49
			300	300 Watt						12.1 x 2.48 x 1.49
FPD	Dimming min 1% (Forward Phase)		40	40 Watt		IP67	Outdoor	120V	24V	4.92 x 2.20 x 0.79
			60	60 Watt						4.92 x 2.20 x 0.79
			75	75 Watt						4.92 x 2.20 x 0.79
			96	96 Watt						4.92 x 2.20 x 0.79
FPD	Dimming min 1% (Forward Phase) with junction box		20	20 Watt		IP14	Indoor	120V	24V	5.60 x 2.00 x 2.14
			40	40 Watt						5.60 x 2.00 x 2.14
			60	60 Watt						6.62 x 2.58 x 2.33
			96	96 Watt						6.62 x 2.58 x 2.33
			150	150 Watt						9.80 x 3.00 x 2.74
			200	200 Watt						9.80 x 3.00 x 2.74
			300	300 Watt						10.07 x 4.20 x 3.50


Regrazer - Accessories

Bracket

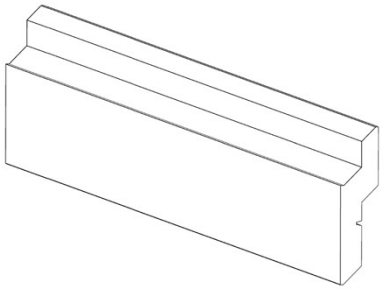





RG02-BR Bracket




Grid Flange

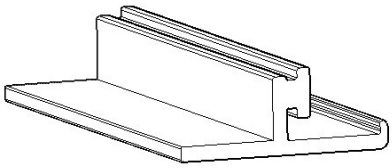





RG02W-GF Grid Flange




Mud-In Flange

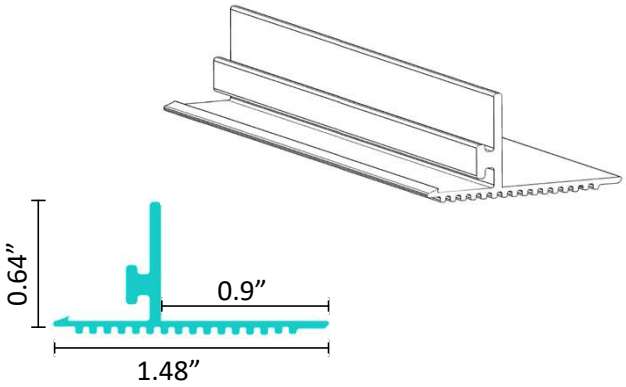

RG02-MI Mud-In Flange



End Cap






RG02-EC End Cap

Linear Connector




BL15-CN180 Linear Connector

Installation: (W-SM) Wall Grazing / Surface Mount

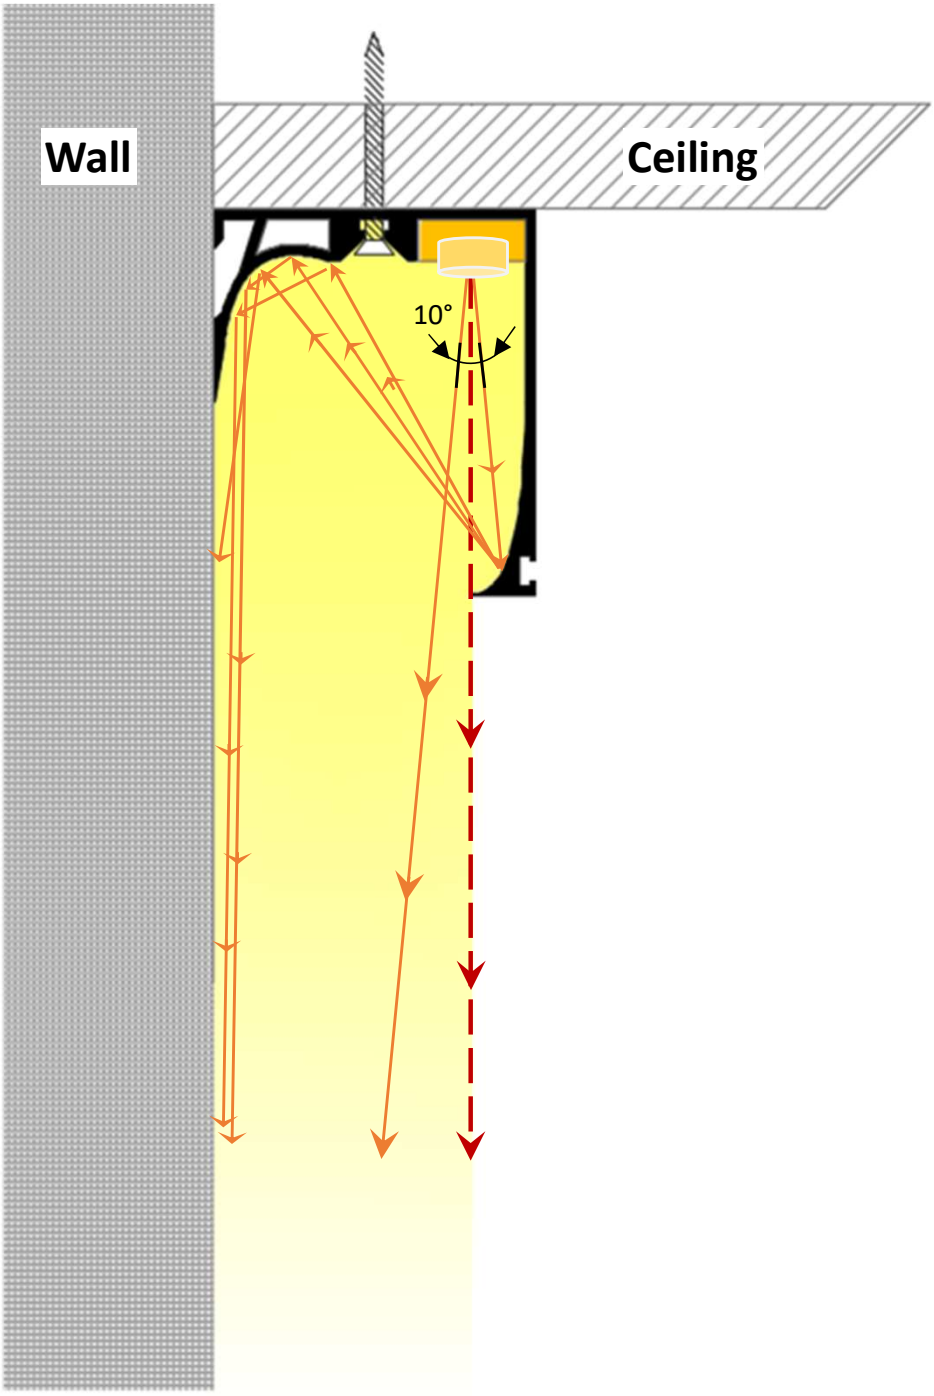


Regrazer – Regressed Installation

Installation: (W-RC) Wall Grazing / Regressed (Ceiling) with blocking

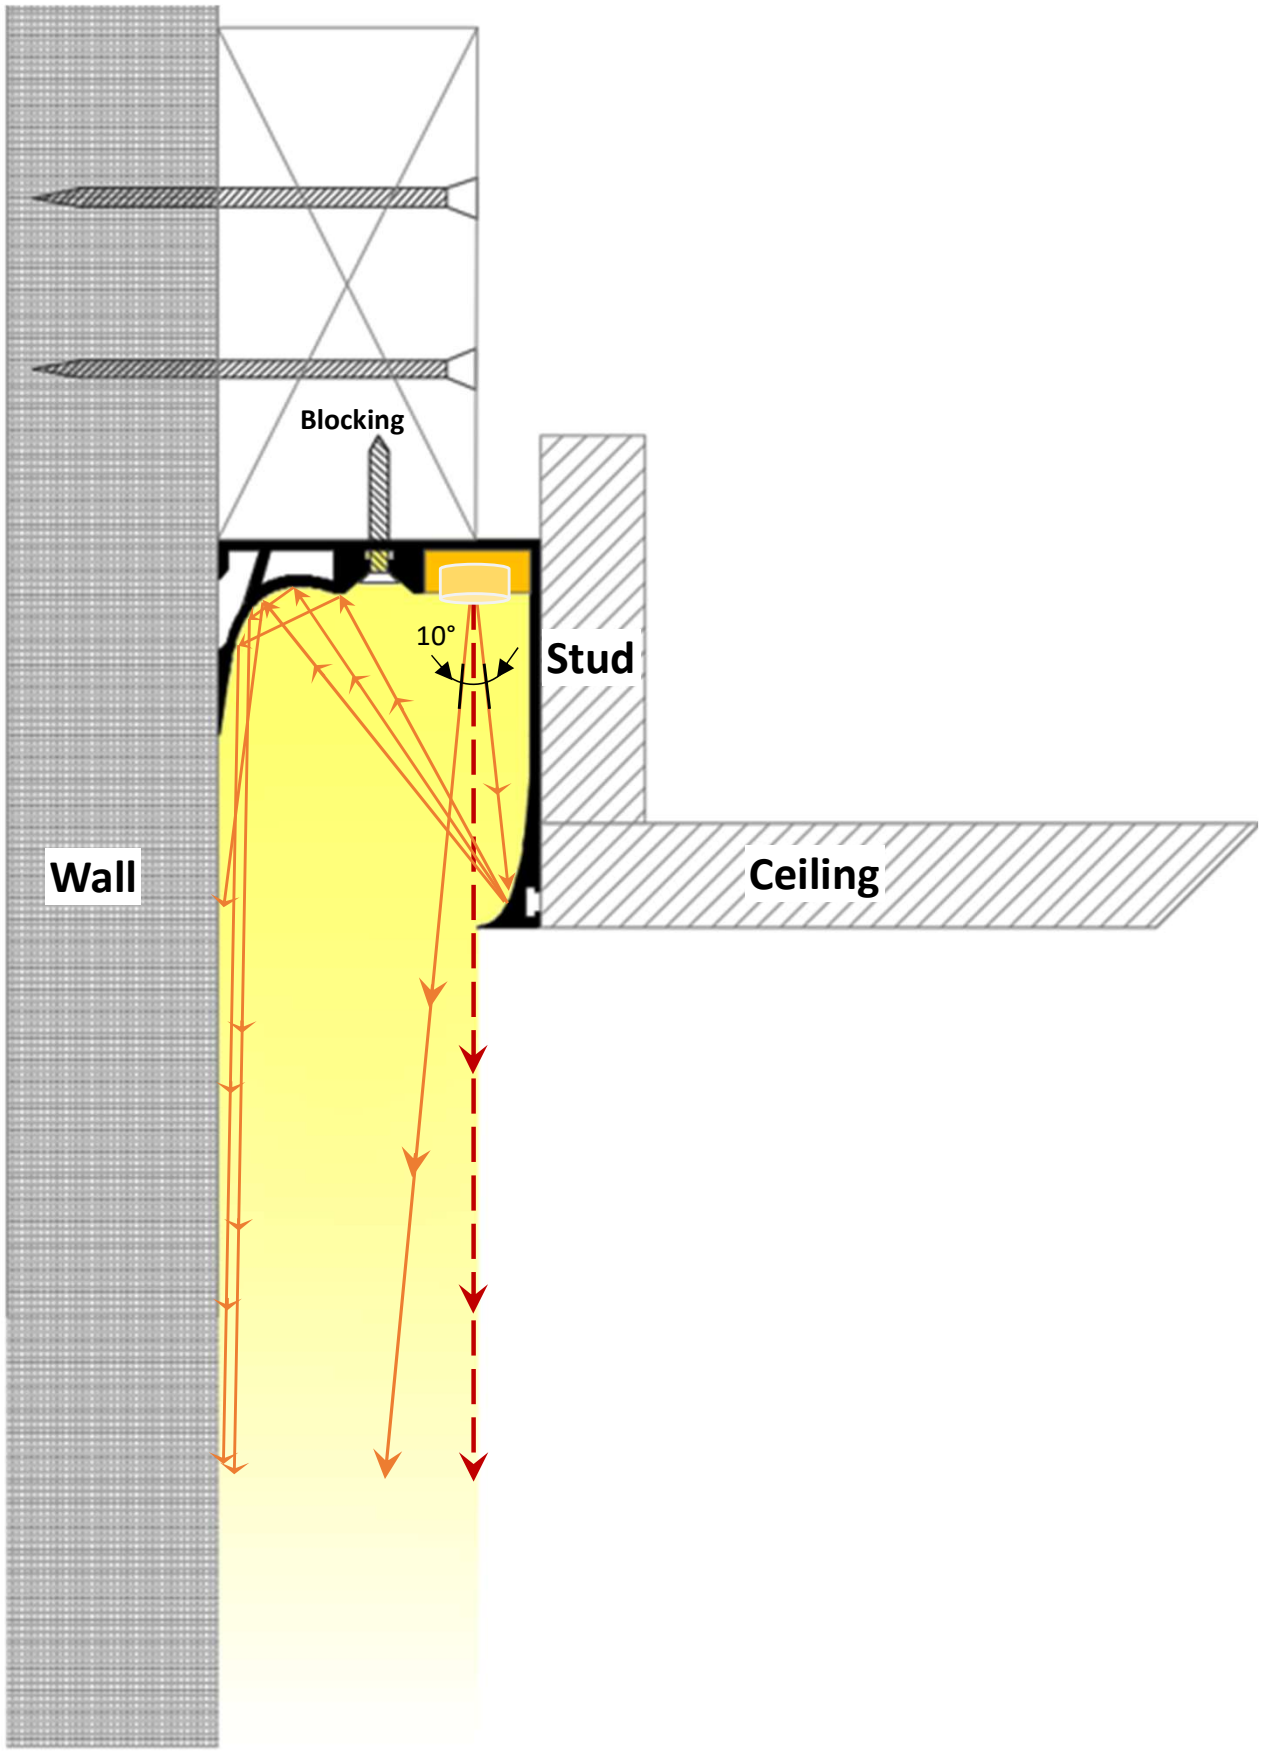


Regrazer – Regressed Installation

Installation: (W-RD-MI)
Wall Grazing / Regressed (Drywall) w/ blocking + Mud-In Flange

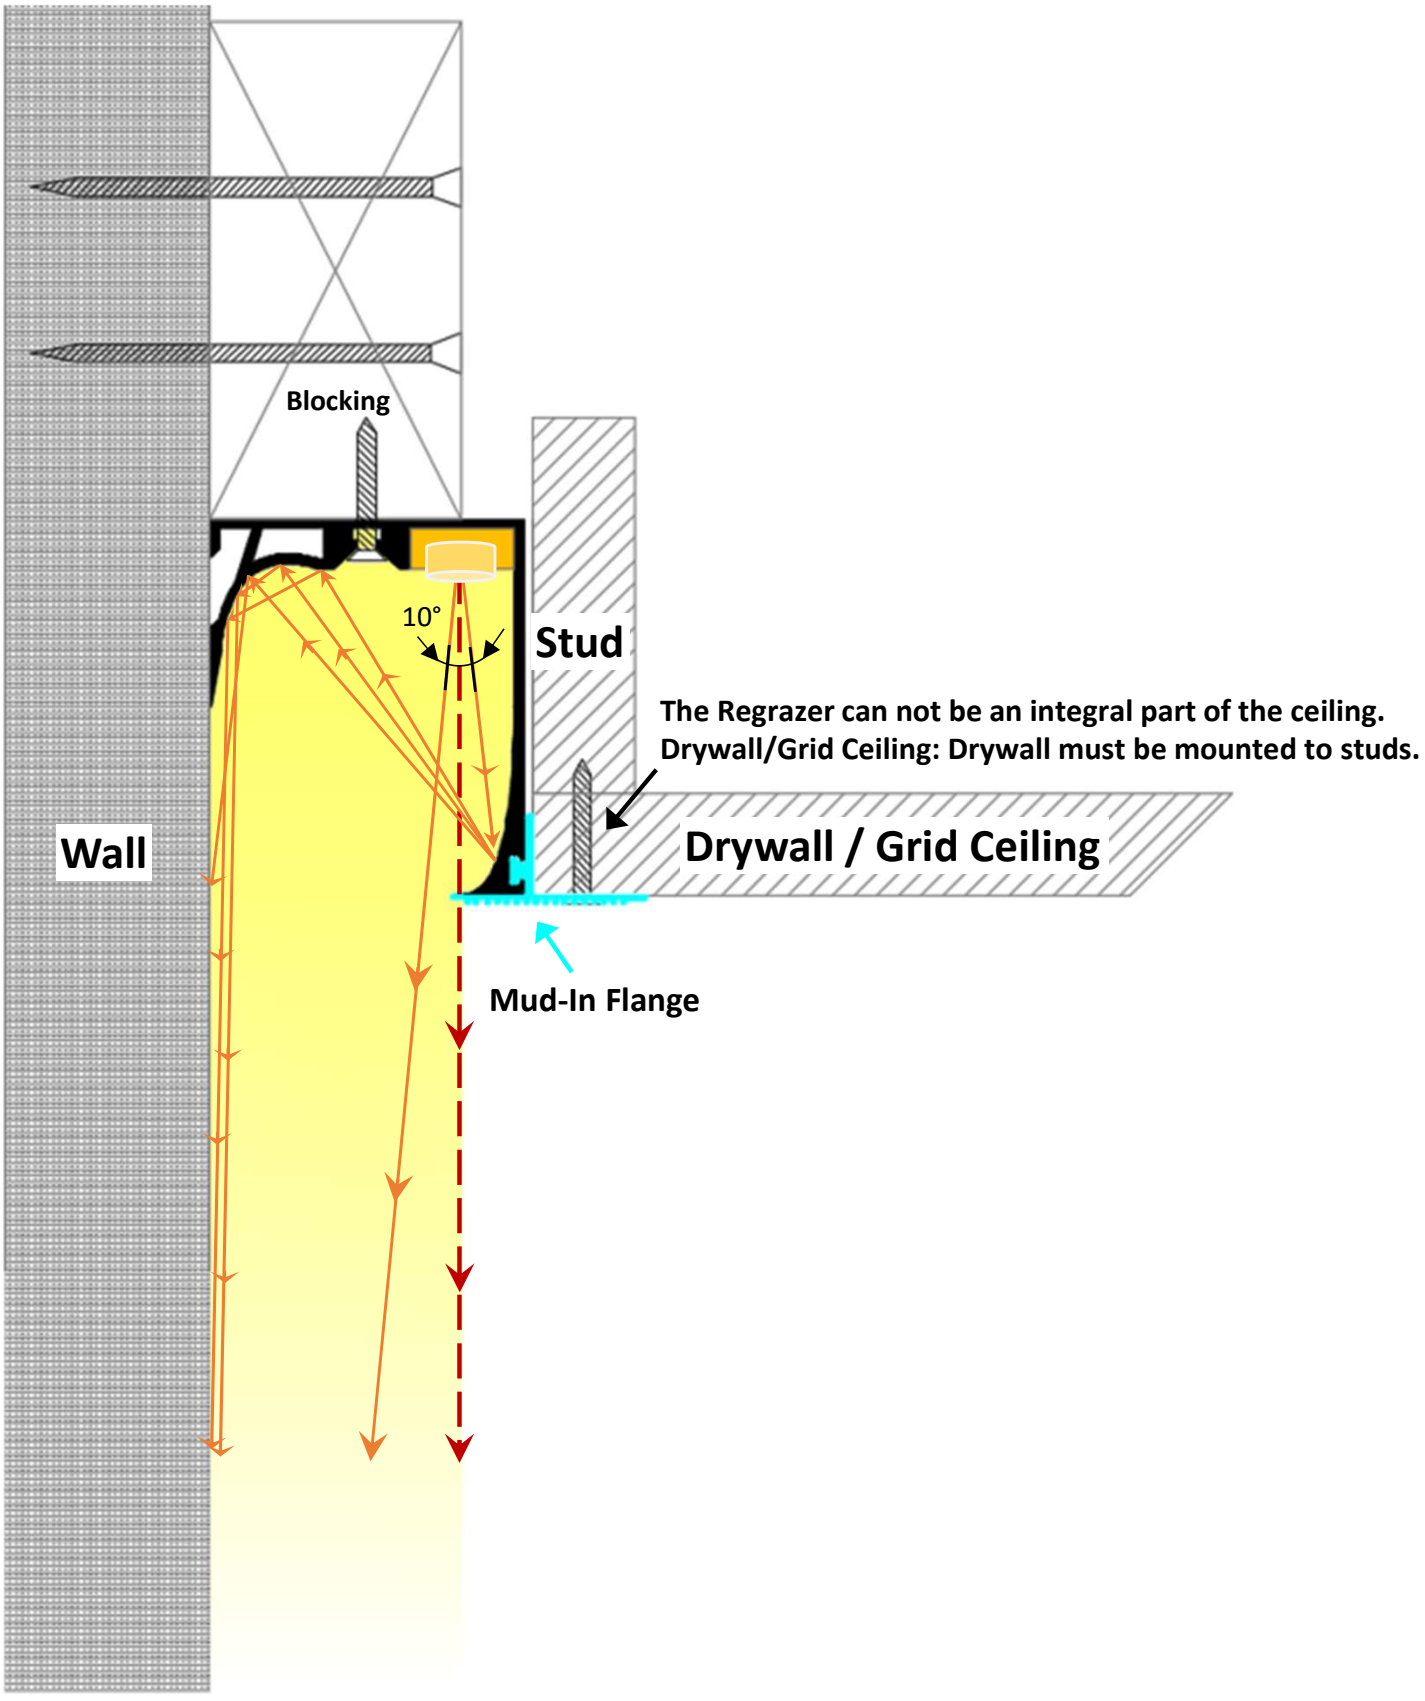


Regrazer – Regressed Installation

Installation: (W-RD-GF)
Wall Grazing / Regressed (Drywall) w/ blocking + Grid Flange

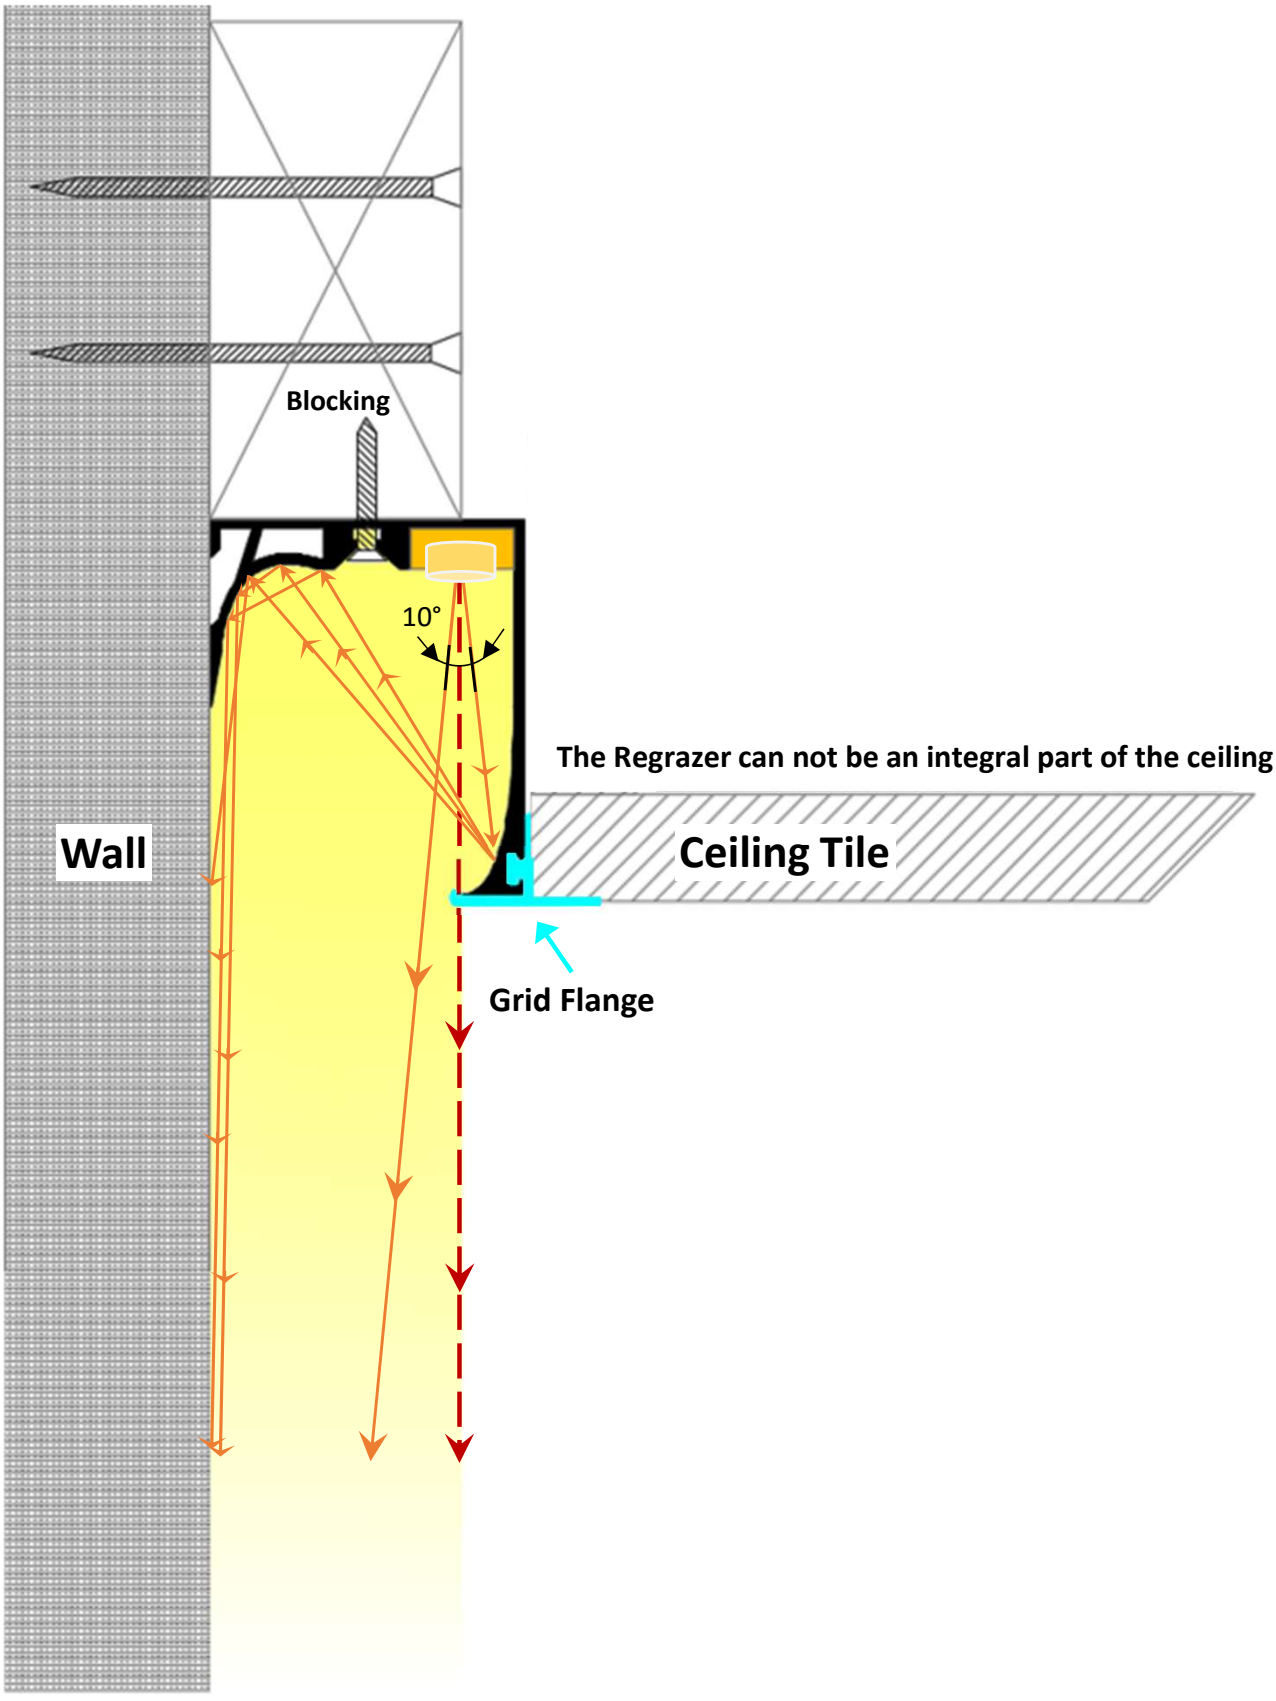


Regrazer – Wall Mount Installation

Installation: (W-WM) Wall Grazing / Wall Mount (regressed with bracket)

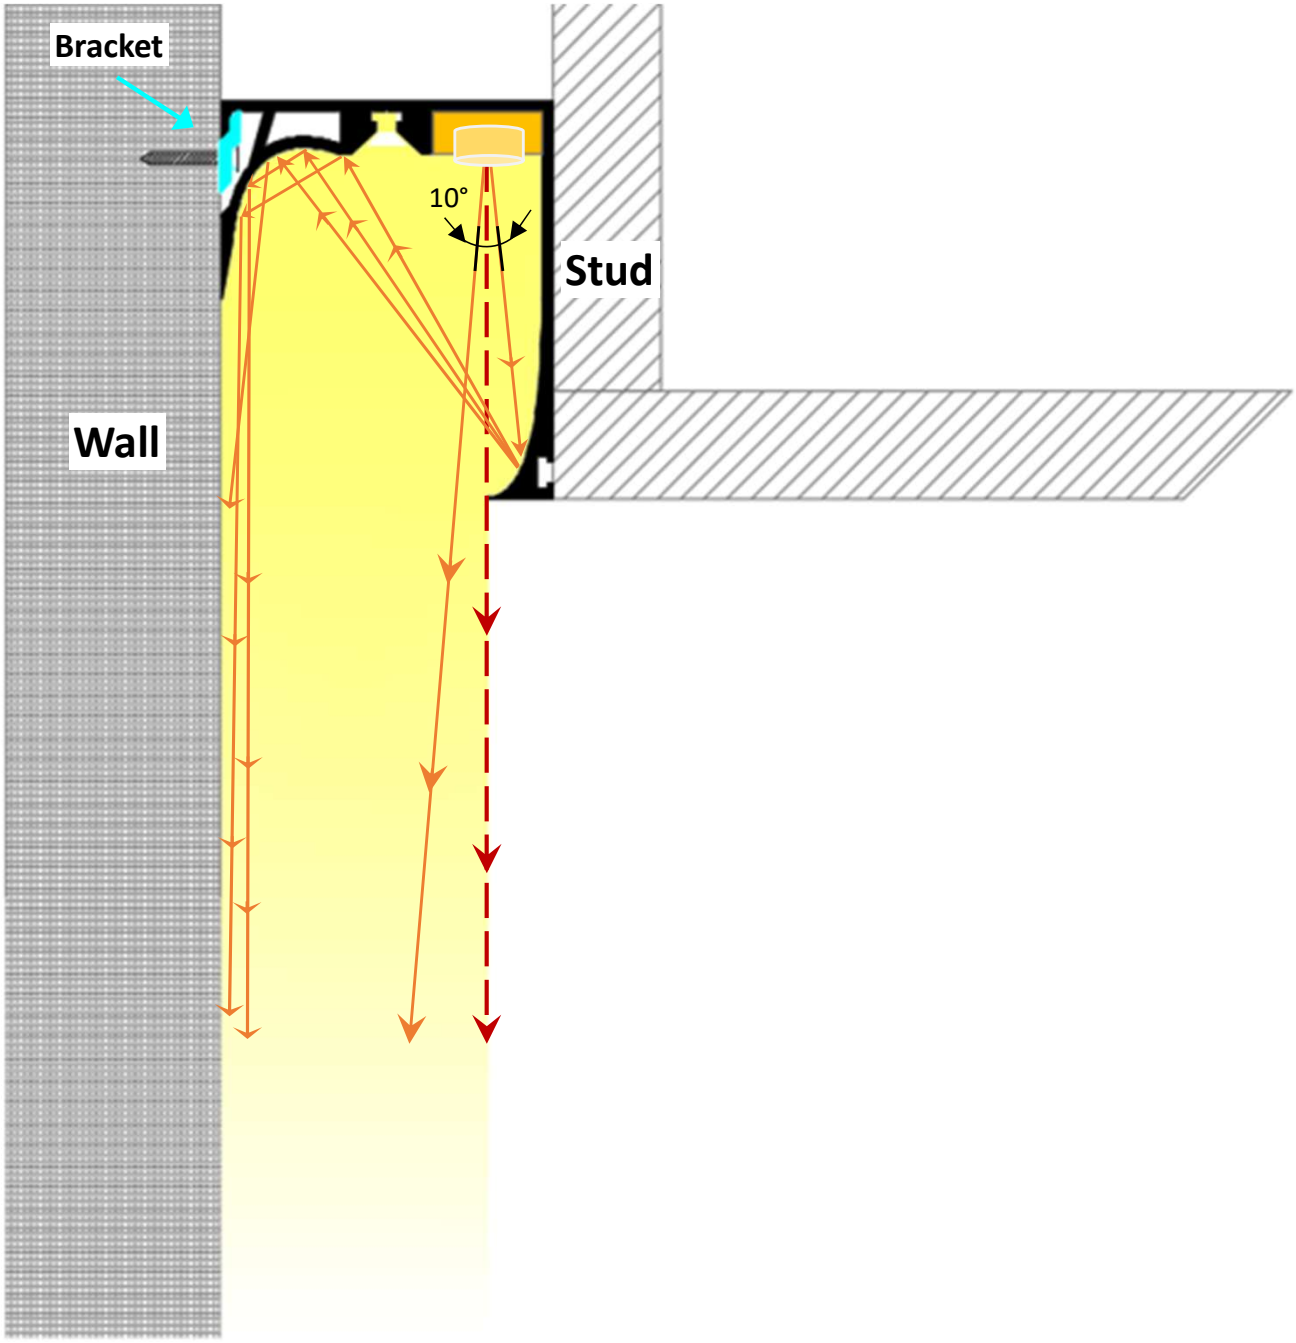


Regrazer – Wall Mount Installation


Installation: (W-WMD) Wall Grazing / Wall Mount (Drywall) (regressed with bracket + mud-in flange)

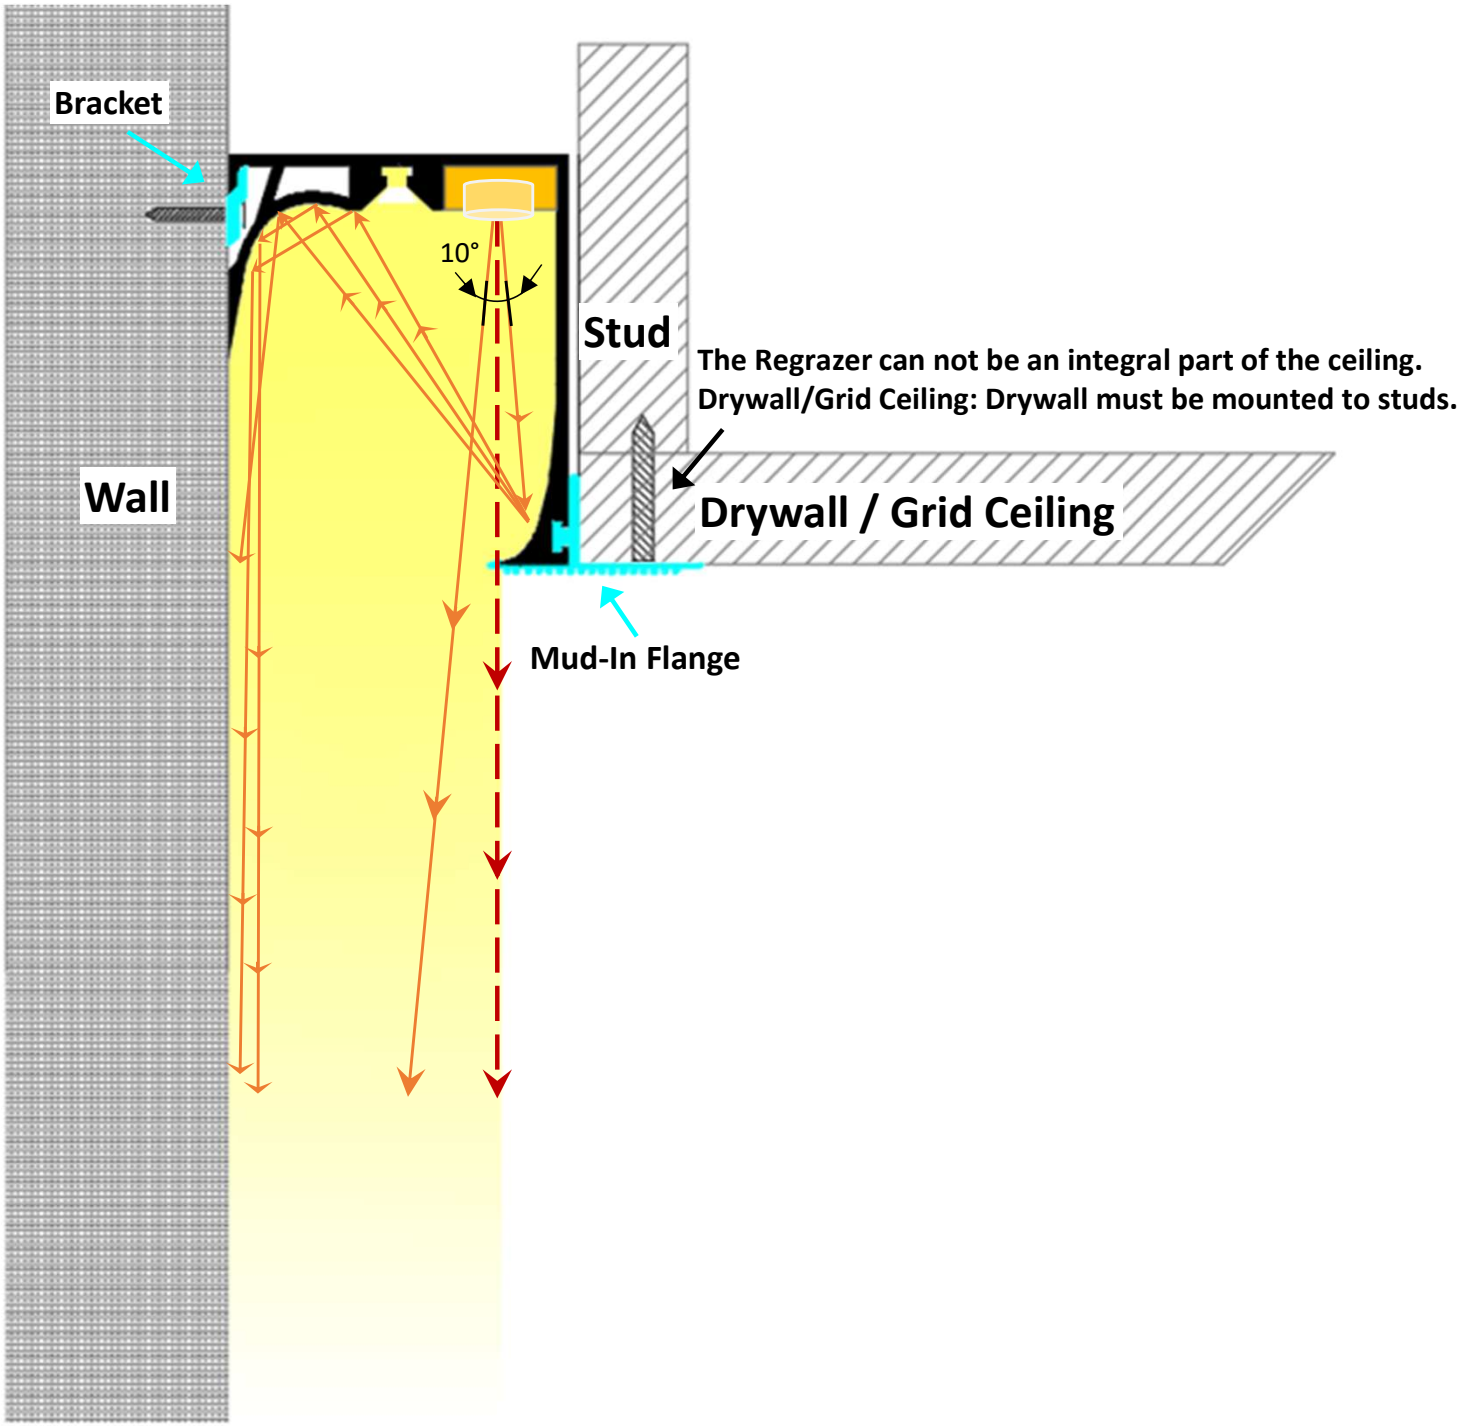


Installation: (W-IU) Wall Grazing / Inground Up (Indoor Only)

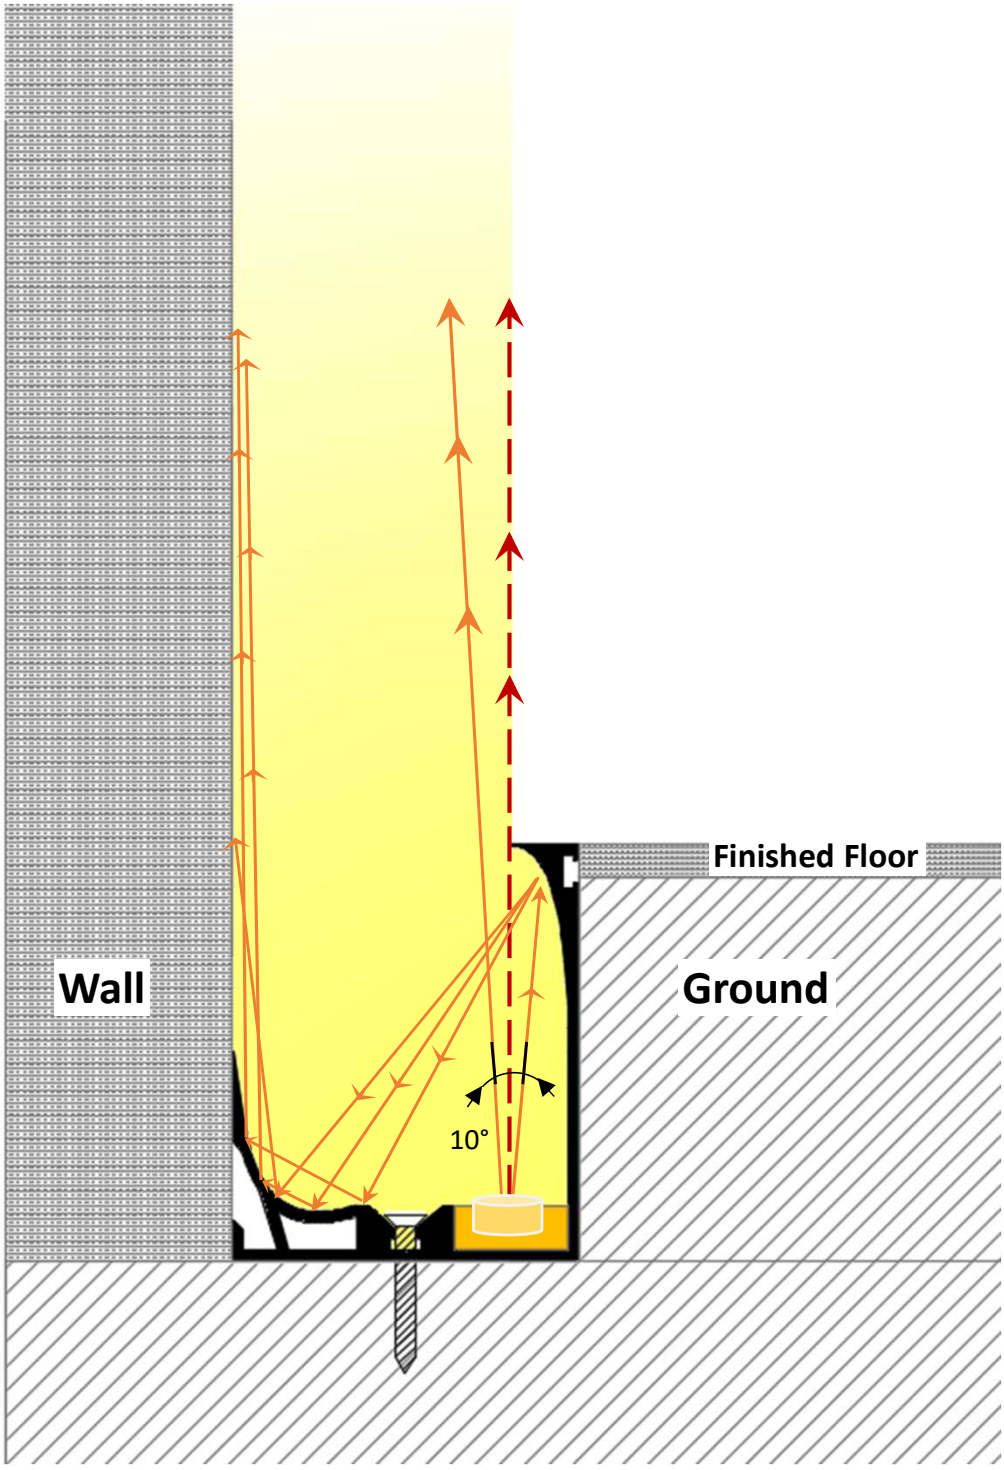

Installation: (C-WM) Ceiling Grazing / Wall Mount

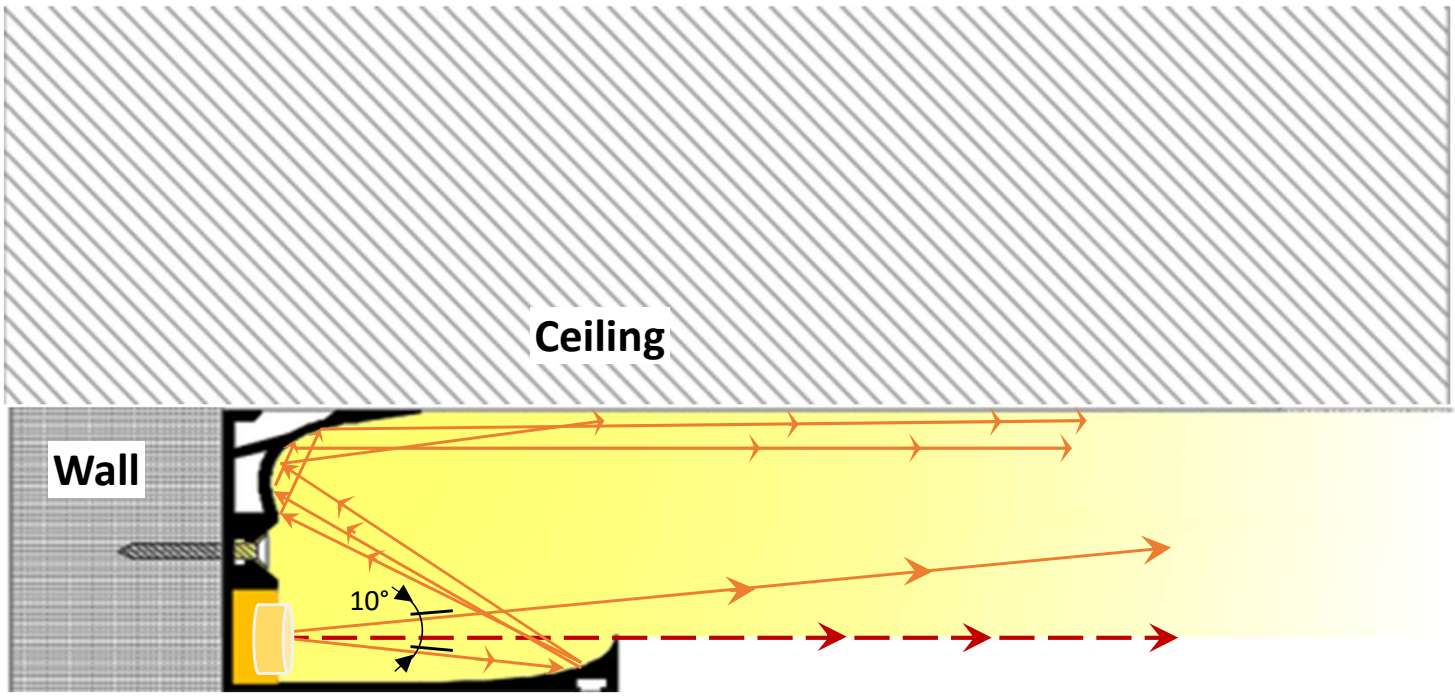

Installation: (G-GO) Ground Grazing / Ground Out

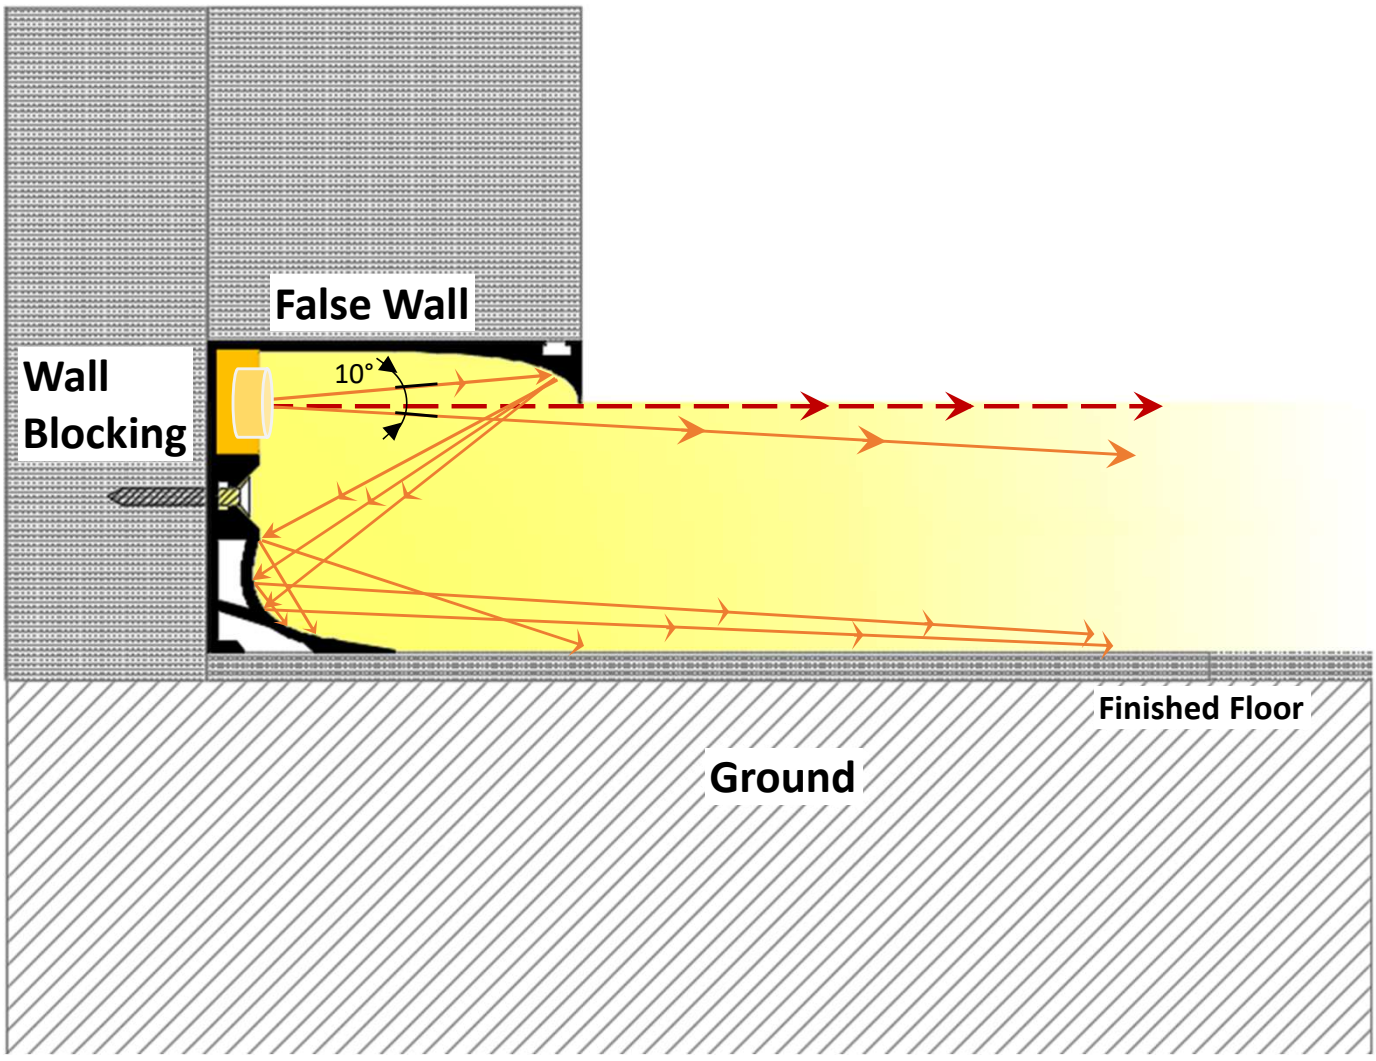

Regrazer – Applications

