



# Regrazer – Specification

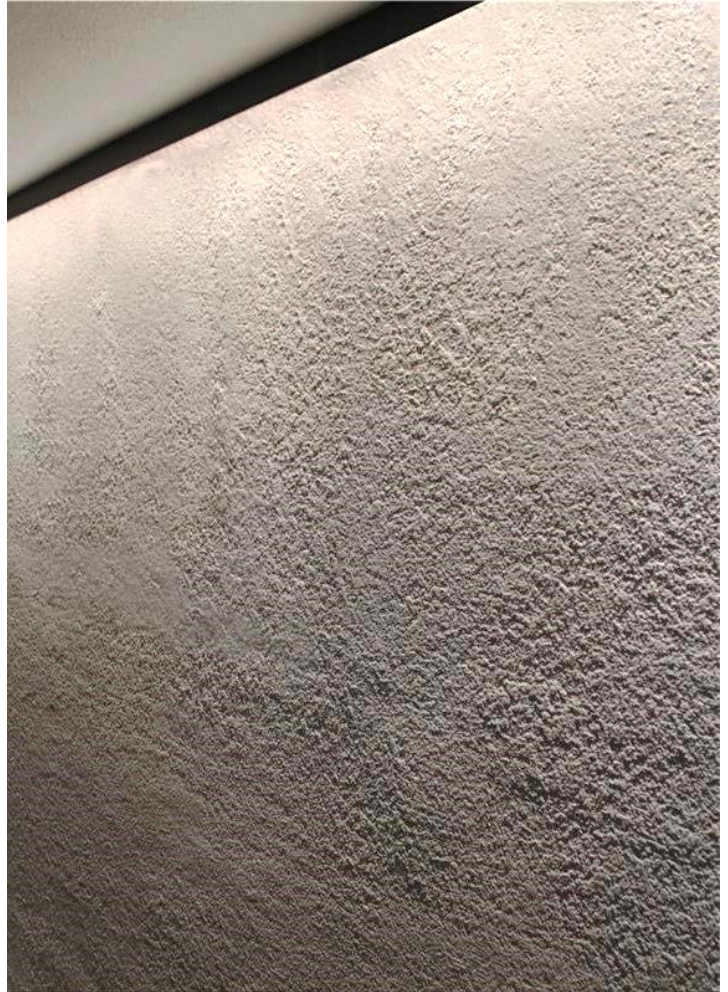

The Regrazer is a small cove grazer that **grazes surfaces up to 40' height**. The inner geometry along with using latest CSP chip technology and glare-reducing optics make this fixture outstanding in both performance and glare protection. Can be mounted directly to ceilings or by using the bracket accessory for wall mounting. Fixture can be cut on site.

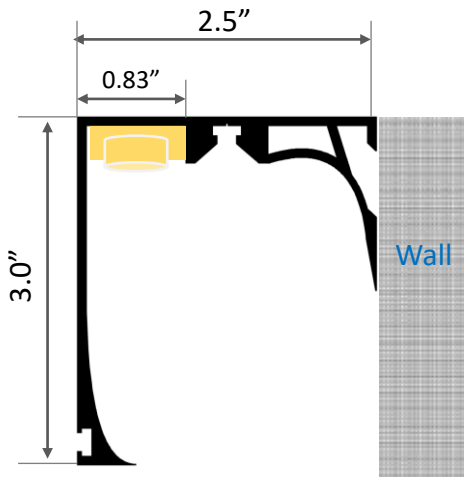

## Product Detail:

Material:	Extruded Aluminum
Colors:	Black, Silver
Dimension (in):	L 78.74" x W 2.5" x H 3.0"
Customization:	Cut to specified length

## Applications:

- Regressed
- Office
- Hallways
- Outdoors
- Lobbies
- Grazing

## Technical Information

Model	CCT	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Cut increment
RG-D10	2700K	~520	14	6.0 W	~90	>90	24V	32'	6"
	3000K	~540	14	6.0 W	~90	>90	24V	32'	6"
	3500K	~570	14	6.0 W	~95	>90	24V	32'	6"
	4000K	~575	14	6.0 W	~95	>90	24V	32'	6"

## Ordering Code

**Example: RG-D1027-CB-BR-DTR-16'-W-RC**

Regrazer, 2700K, Black, Bracket, Non-Dimming, 16 ft, Wall Grazing, Regressed Ceiling


RG-D10	-	27	-	CB	-	BR	-	NTR	-	16'	-	W-RC
--------	---	----	---	----	---	----	---	-----	---	-----	---	------

Model	+	CCT	+	Finished	+	Accessories	+	Driver	+	Length	+	Installation
-------	---	-----	---	----------	---	-------------	---	--------	---	--------	---	--------------




<b>RG-D10</b>		<b>27</b> 2700K		<b>CB</b> Black		<b>BR</b> Bracket		<b>NTR</b> Non-Dimming		<b>Enter length:</b>		<b>Wall Grazing</b>
		<b>30</b> 3000K		<b>CS</b> Silver		<b>MIF</b> Mud-In-Flange		<b>DTR</b> 10%-0-10V		6" increment,		<b>W-SM</b> Surface Mount
		<b>35</b> 3500K				<b>LC</b> Linear Connector		<b>DUR</b> 1%-0-10V		Max 32 ft		<b>W-RC</b> Regressed Ceiling
		<b>40</b> 4000K						<b>FPD</b> 0.1%-0-10V				<b>W-RD</b> Regressed Drywall
												<b>W-WM</b> Wall Mount
												<b>W-WMD</b> Wall Mount Drywall
												<b>W-IU</b> Inground Up
												<b>Ceiling Grazing</b>
												<b>C-WM</b> Wall Mount
												<b>Ground Grazing</b>
												<b>G-GO</b> Ground Out

## Power Supply Ordering Codes




DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67													
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION											
<b>NTR</b> Non-Dimming		+	50	50 Watt	+	<b>IP00</b>	Indoor	88-264V	24V	3.90 x 3.82 x 1.42											
				75 Watt						5.08 x 3.82 x 1.50											
				100 Watt						6.26 x 3.82 x 1.50											
				150 Watt						7.84 x 3.85 x 1.50											
				200 Watt						8.46 x 4.53 x 1.18											
				320 Watt						8.46 x 4.53 x 1.18											
				750 Watt						9.84 x 5.00 x 1.61											
				960 Watt						11.60 x 5.00 x 1.61											
				<b>12</b>							+	12	12 Watt	+	<b>IP42</b>	Indoor	90-264V	24V	3.03 x 1.57 x 1.14		
													16 Watt						3.03 x 1.57 x 1.14		
													25 Watt						3.31 x 2.24 x 1.16		
													35 Watt						3.31 x 2.24 x 1.16		
<b>20</b>		+	20	20 Watt	+	<b>IP67</b>	Outdoor	90-264V	24V	4.65 x 1.38 x 1.02											
				35 Watt						5.83 x 1.57 x 1.18											
				60 Watt						6.40 x 1.67 x 1.26											
				100 Watt						7.48 x 2.05 x 1.46											
				150 Watt						7.52 x 2.48 x 1.48											
				320 Watt						9.92 x 3.54 x 1.72											
<b>DTR</b> Dimming min 10% (0-10V)		+	16	16 Watt	+	<b>IP30</b>	Indoor	90-305V	24V	5.83 x 1.57 x 1.26											
				25 Watt						6.40 x 1.70 x 1.26											
				40 Watt						6.40 x 1.70 x 1.26											
				60 Watt						6.34 x 2.40 x 1.42											
				90 Watt						8.66 x 2.68 x 1.53											
				96 Watt						8.66 x 2.68 x 1.53											
				120 Watt						8.97 x 2.68 x 1.58											
				150 Watt						8.97 x 2.68 x 1.58											
				185 Watt						9.88 x 2.68 x 1.58											
				240 Watt						9.92 x 3.54 x 1.72											
				480 Watt						10.32 x 4.92 x 1.72											
				600 Watt						11.02 X 5.67 X 1.91											
<b>FPD</b> Dimming min 1% (Forward Phase)		+	20	20 Watt	+	<b>IP67</b>	Outdoor	120V	24V	4.92 x 2.20 x 0.79											
				40 Watt						4.92 x 2.20 x 0.79											
				60 Watt						4.92 x 2.20 x 0.79											
				75 Watt						4.92 x 2.20 x 0.79											
				96 Watt						4.92 x 2.20 x 0.79											
				<b>FPD</b> Dimming min 1% (Forward Phase) with junction box							+	20	20 Watt	+	<b>IP14</b>	Outdoor	120V	24V	5.60 x 2.00 x 2.14		
40 Watt	5.60 x 2.00 x 2.14																				
60 Watt	6.62 x 2.58 x 2.33																				
96 Watt	6.62 x 2.58 x 2.33																				
150 Watt	9.80 x 3.00 x 2.74																				
300 Watt	10.07 x 4.20 x 3.50																				



## Bracket

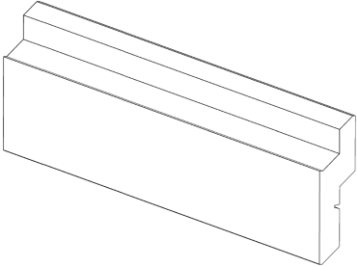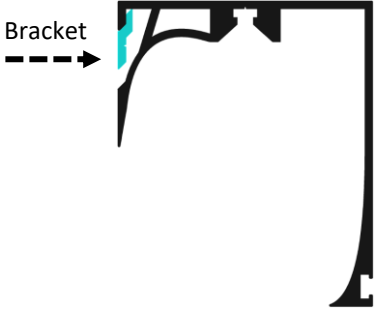 <p><b>RG02-BR</b> Bracket</p>		 <p>Bracket</p>
---	---	---

## Mud-In Flange

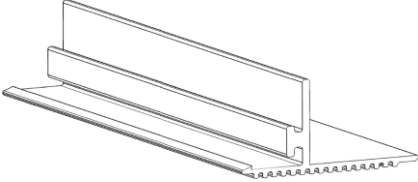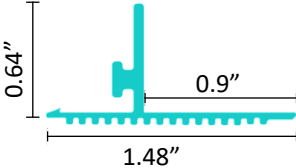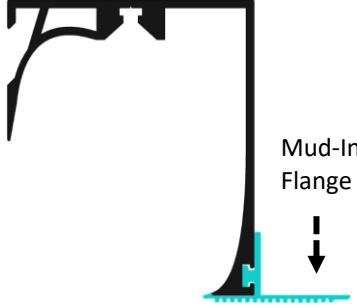 <p><b>RG02-MI</b> Mud-In Flange</p>		 <p>Mud-In Flange</p>
--	---	--


## End Cap

 <p><b>RG02-EC</b> End Cap</p>	
---	---


## Linear Connector

 <p><b>RG02-LC</b> Connector</p>
---


## Installation: (W-SM) Wall Grazing / Surface Mount

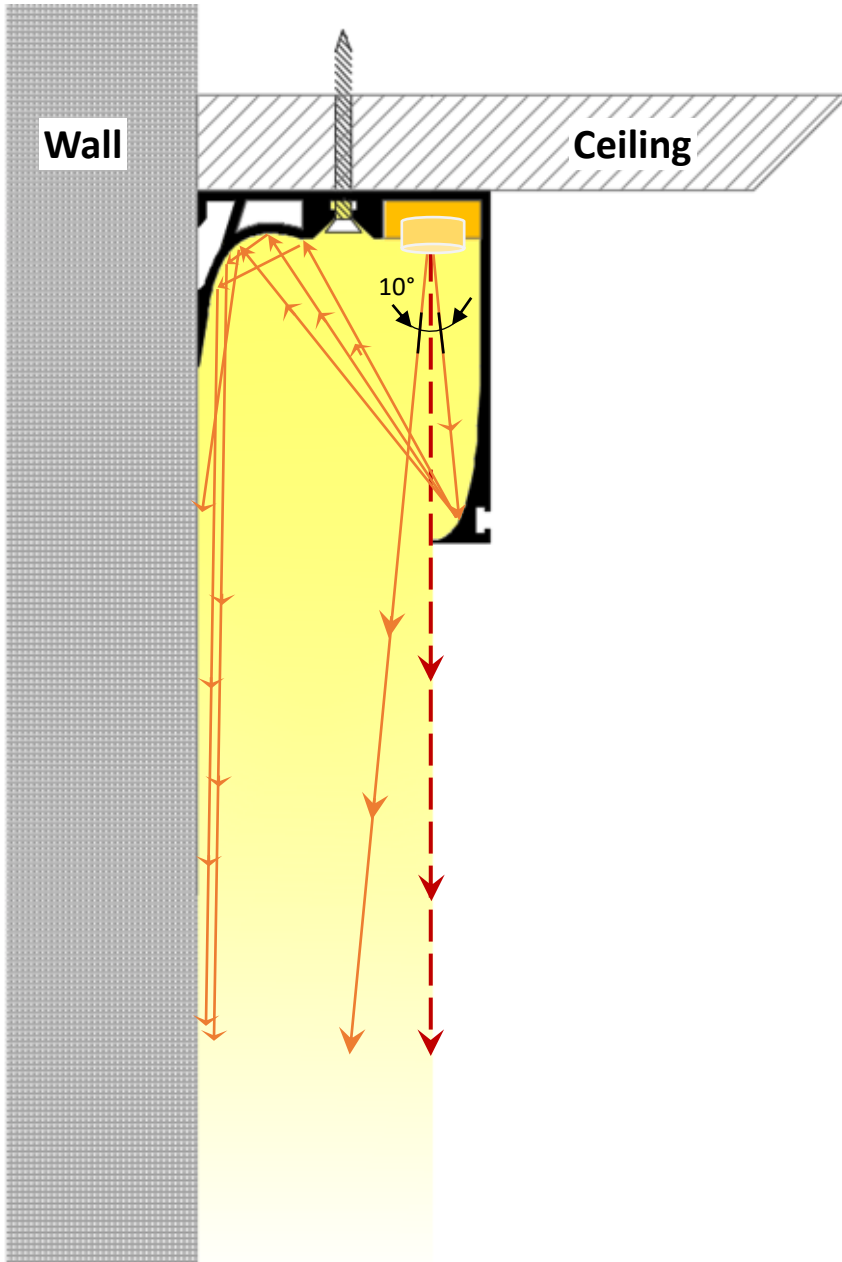


## Installation: (W-RC) Wall Grazing / Regressed (Ceiling) with blocking

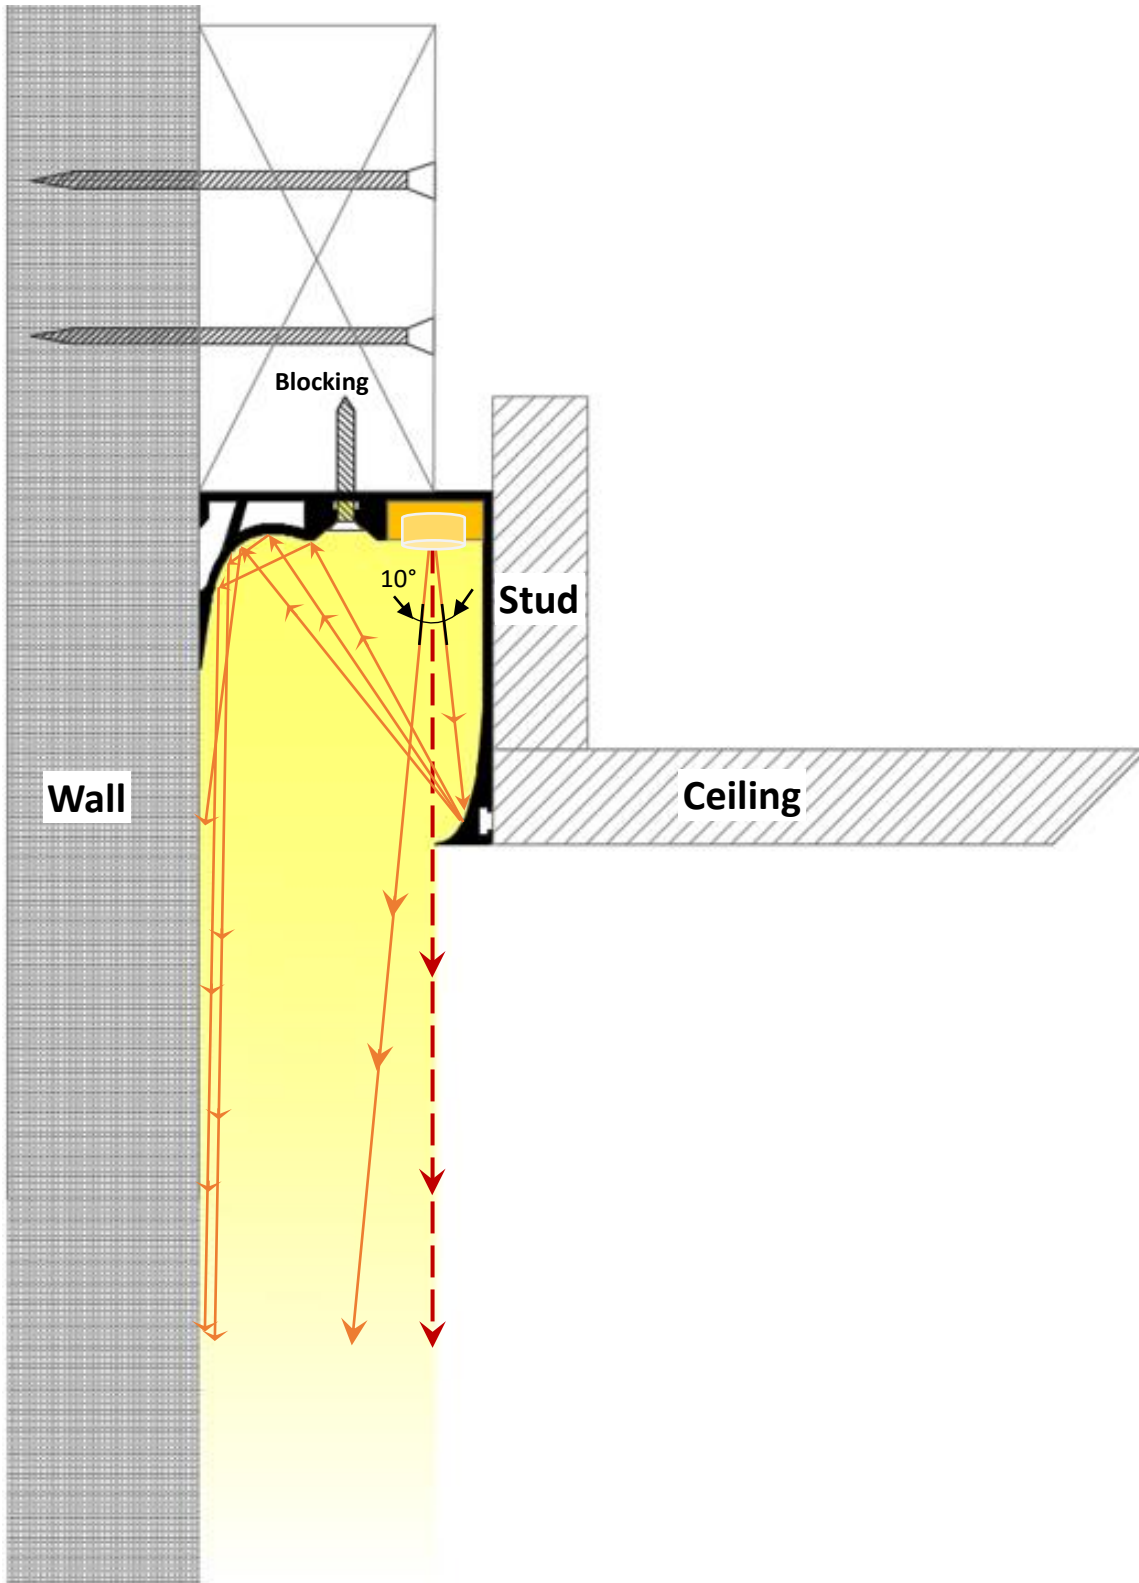

Installation: (W-RD) Wall Grazing / Regressed (Drywall) w/ blocking + mud-in flange

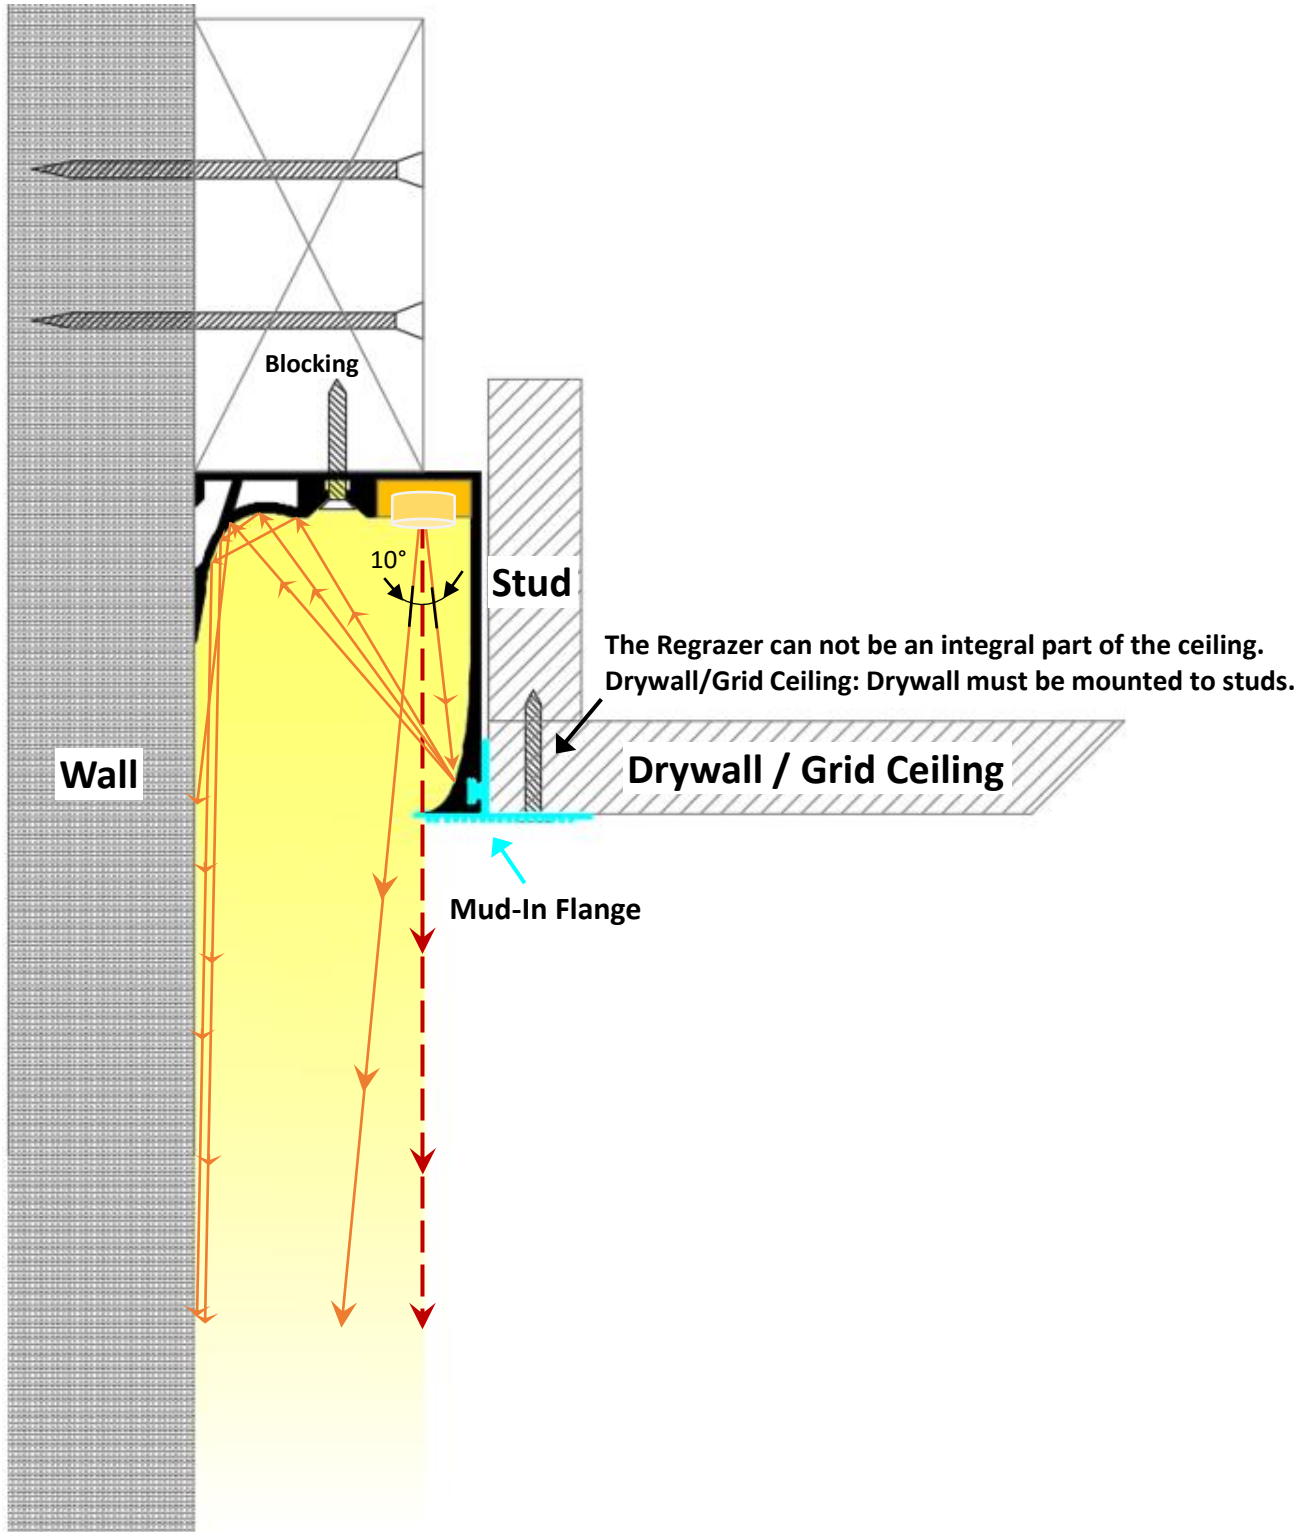


Installation: (W-WM) Wall Grazing / Wall Mount (regressed with bracket)

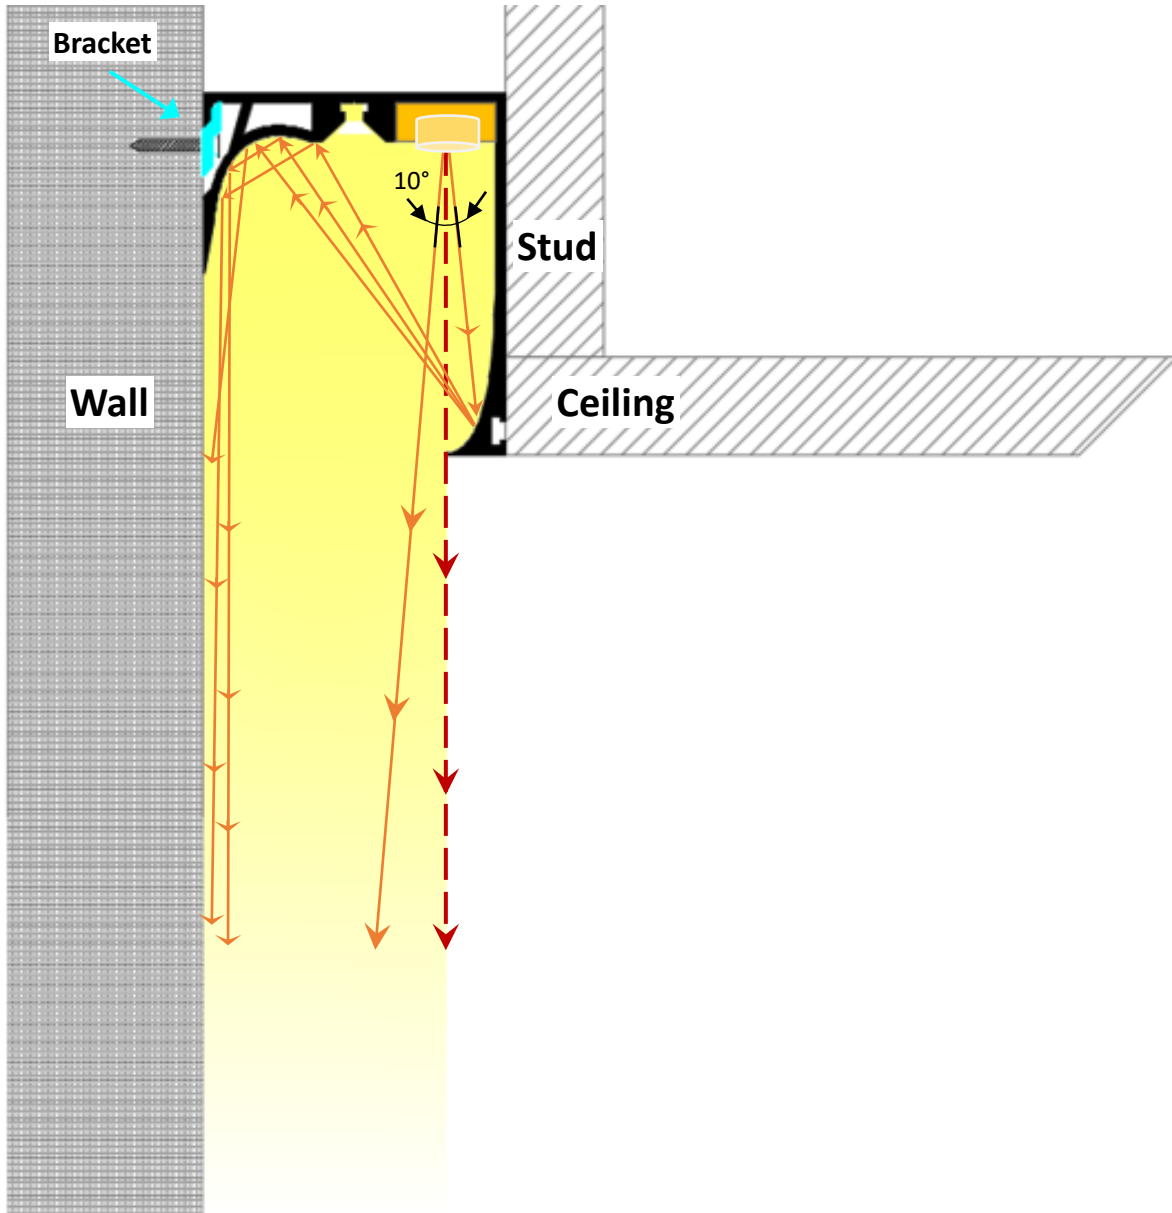





Installation: (W-WMD) Wall Grazing / Wall Mount (Drywall)  
(regressed with bracket + mud-in flange)

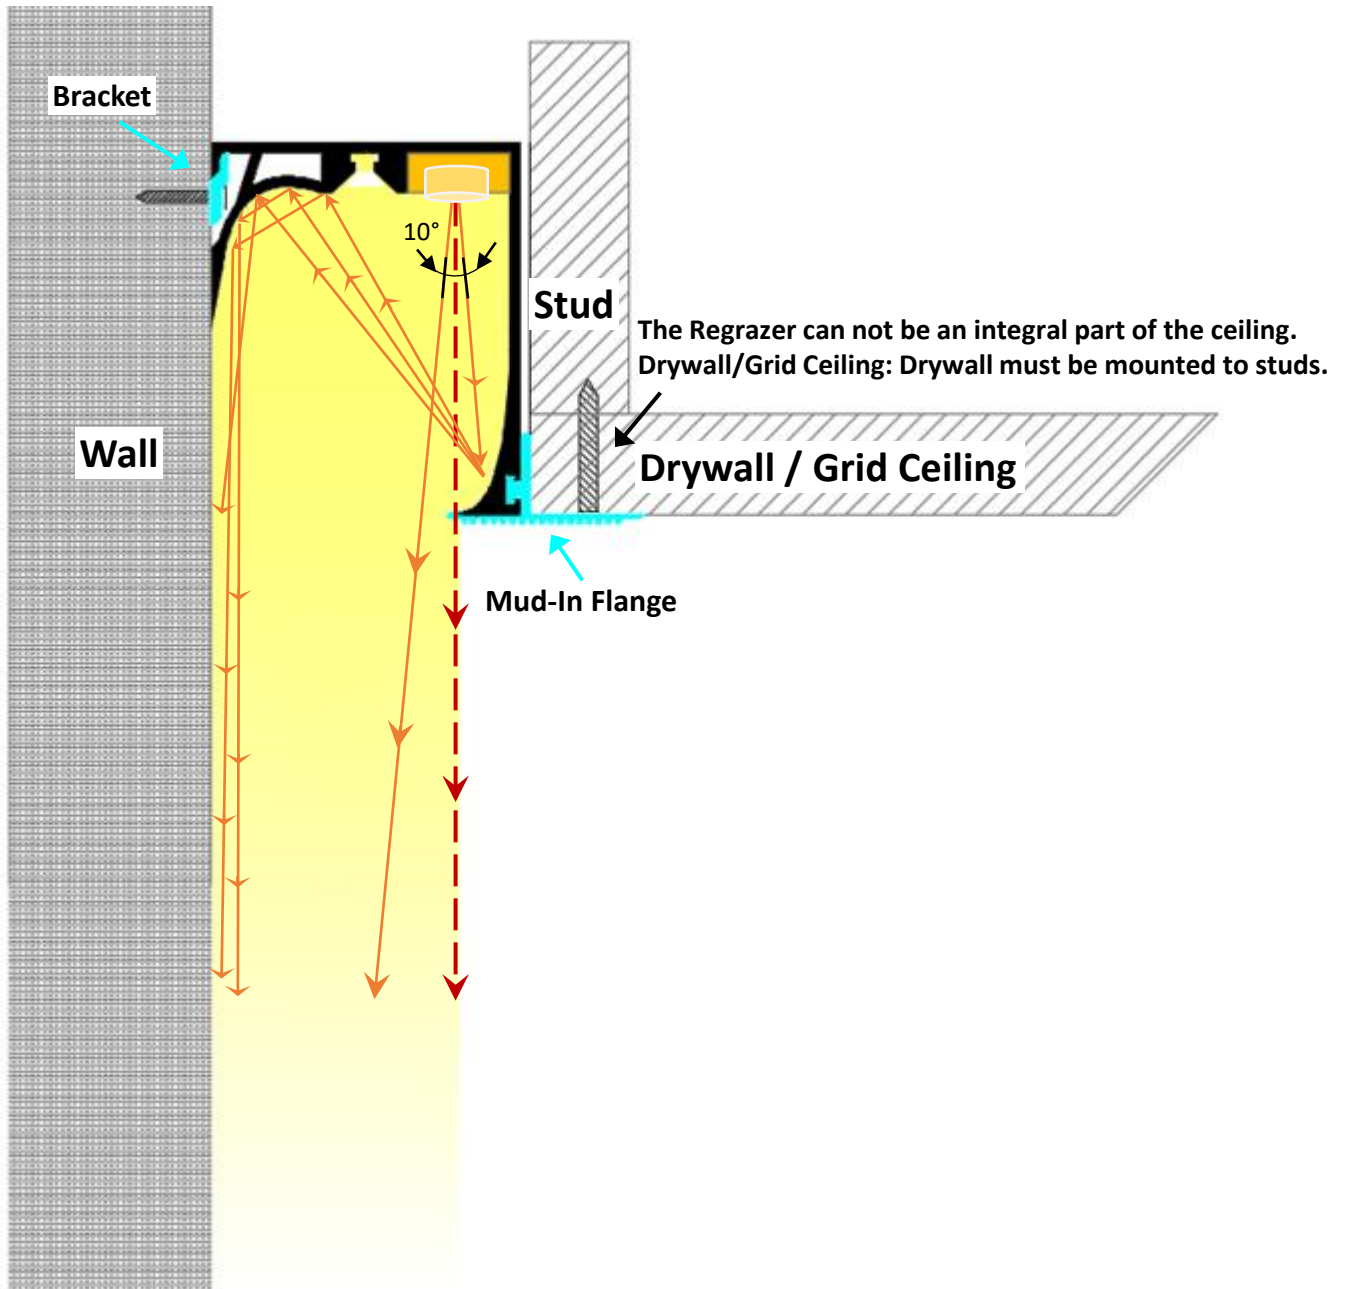

## Installation: (W-IU) Wall Grazing / Inground Up (Indoor Only)

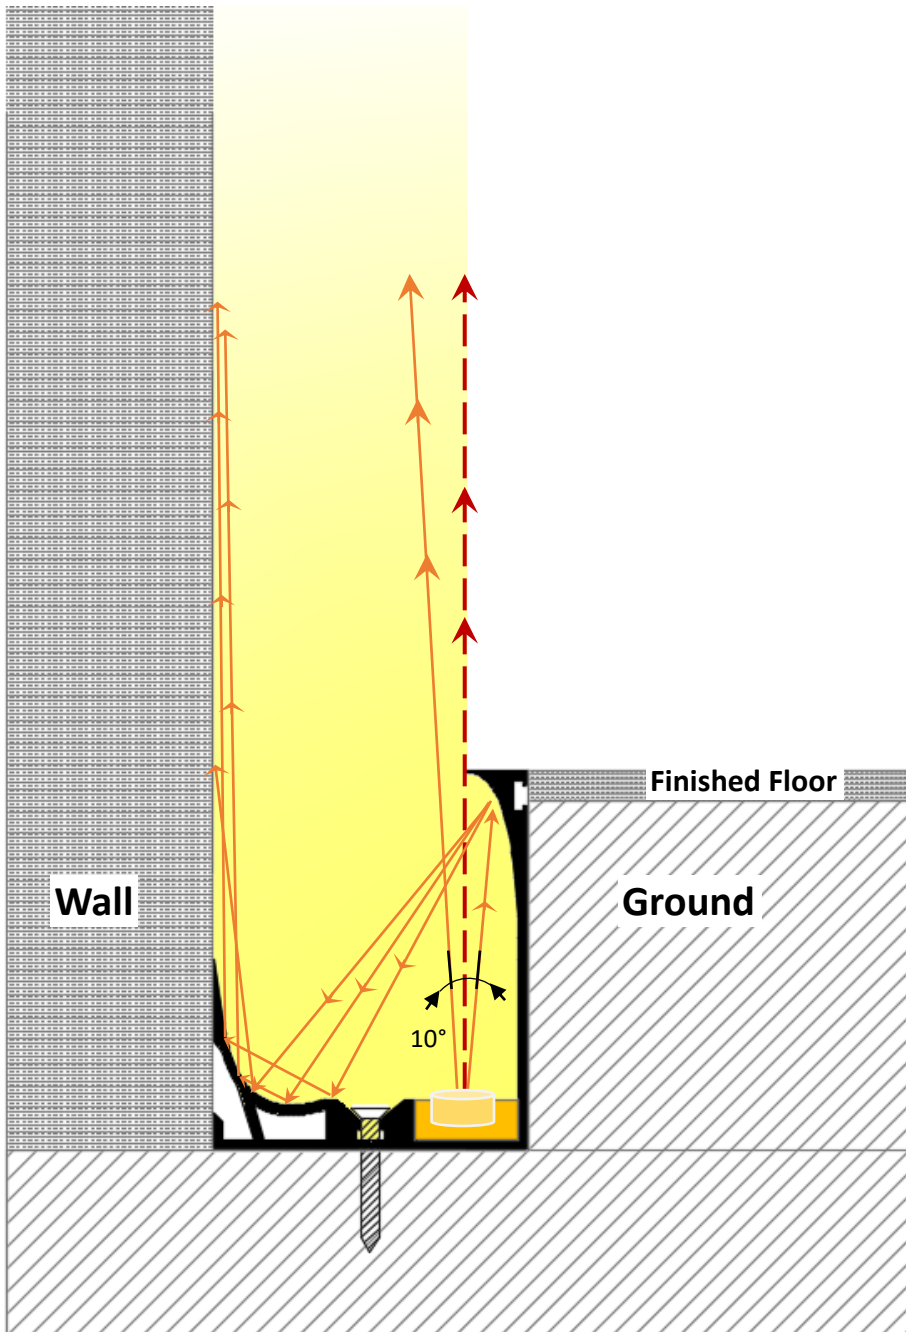

## Installation: (C-WM) Ceiling Grazing / Wall Mount

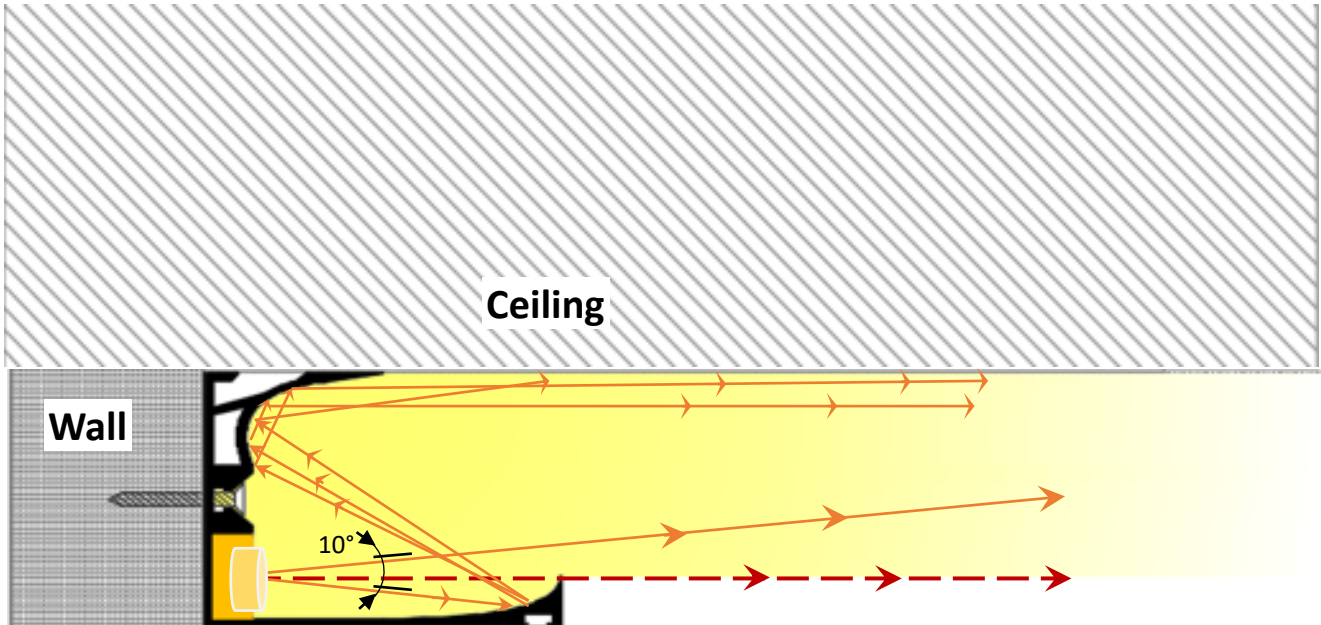

**Installation: (G-GO) Ground Grazing / Ground Out**

