



Regrazer – Specification

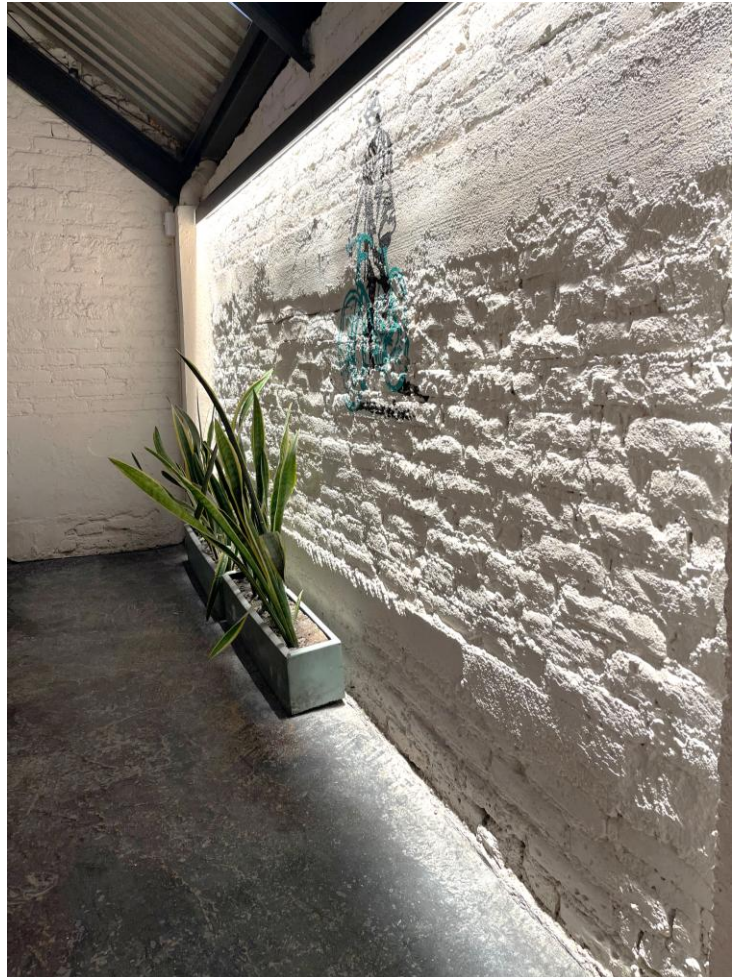

The Regrazer is a small cove grazer that **grazes surfaces up to 40' height**. The inner geometry along with using latest CSP chip technology and glare-reducing optics make this fixture outstanding in both performance and glare protection. Can be mounted directly to ceilings or by using the bracket accessory for wall mounting. Fixture can be cut on site.

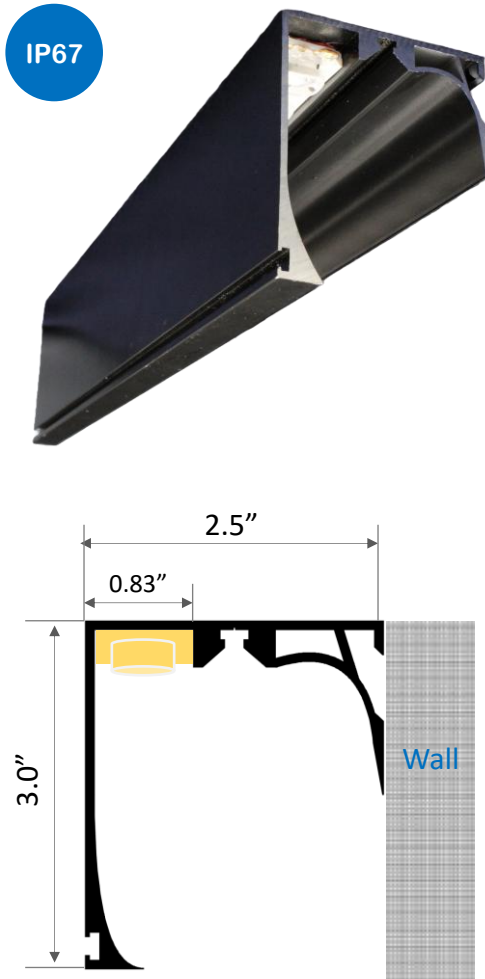

Product Detail:

Material:	Extruded Aluminum
Colors:	Black, Silver
Dimension (in):	L 78.74" x W 2.5" x H 3.0"
Customization:	Cut to specified length

Applications:

- Regressed
- Office
- Hallways
- Outdoors
- Lobbies
- Grazing

Technical Information

Model	CCT	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max run length	Cut increment
RG-D10	2400K	~510	14	6.0 W	~90	>90	24V	32'	6"
	2700K	~520	14	6.0 W	~90	>90	24V	32'	6"
	3000K	~540	14	6.0 W	~90	>90	24V	32'	6"
	3500K	~570	14	6.0 W	~95	>90	24V	32'	6"
	4000K	~575	14	6.0 W	~95	>90	24V	32'	6"

Ordering Code

Example: RG-D1027-CB-BR-DTR-16'-W-RC

Regrazer, 2700K, Black, Bracket, Non-Dimming, 16 ft, Wall Grazing, Regressed Ceiling


RG-D10	-	27	-	CB	-	BR	-	NTR	-	16'	-	W-RC
--------	---	----	---	----	---	----	---	-----	---	-----	---	------

Model	+	CCT	+	Finished	+	Accessories	+	Driver	+	Length	+	Installation
-------	---	-----	---	----------	---	-------------	---	--------	---	--------	---	--------------




RG-D10		24 2400K		CB Black		BR Bracket		NTR Non-Dimming		Enter length:		Wall Grazing
		27 2700K		CS Silver		MIF Mud-In-Flange		DTR 10%-0-10V		6" increment,		W-SM Surface Mount
		30 3000K						DUR 1%-0-10V		Max 32 ft		W-RC Regressed Ceiling
		35 3500K				LC Linear Connector		FPD 0.1%-0-10V				W-RD Regressed Drywall
		40 4000K										W-WM Wall Mount
												W-WMD Wall Mount Drywall
												W-IU Inground Up
												Ceiling Grazing
												C-WM Wall Mount
												Ground Grazing
												G-GO Ground Out

Power Supply Ordering Codes




DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67								
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION						
NTR Non-Dimming		+	50	50 Watt	+	IP00	Indoor	88-264V	24V	3.90 x 3.82 x 1.42						
			75	75 Watt						5.08 x 3.82 x 1.50						
			100	100 Watt						6.26 x 3.82 x 1.50						
			150	150 Watt						7.84 x 3.85 x 1.50						
			200	200 Watt						8.46 x 4.53 x 1.18						
			320	320 Watt						8.46 x 4.53 x 1.18						
			750	750 Watt						9.84 x 5.00 x 1.61						
			960	960 Watt						11.60 x 5.00 x 1.61						
			12	12 Watt						IP42	Indoor	+	90-264V	24V	3.03 x 1.57 x 1.14	
			16	16 Watt											3.03 x 1.57 x 1.14	
			25	25 Watt											3.31 x 2.24 x 1.16	
			35	35 Watt											3.31 x 2.24 x 1.16	
		+	20	20 Watt	IP67	Outdoor	90-264V	24V	4.65 x 1.38 x 1.02							
			35	35 Watt					5.83 x 1.57 x 1.18							
			60	60 Watt					6.40 x 1.67 x 1.26							
			100	100 Watt					7.48 x 2.05 x 1.46							
			150	150 Watt					7.52 x 2.48 x 1.48							
			240	240 Watt					9.61 x 2.68 x 1.53							
			320	320 Watt					9.92 x 3.54 x 1.72							
			16	16 Watt					IP30	Indoor	+	90-305V	24V	5.83 x 1.57 x 1.26		
25	25 Watt	IP67	Outdoor	90-305V	24V	5.83 x 1.57 x 1.26										
40	40 Watt					6.40 x 1.70 x 1.26										
60	60 Watt					6.40 x 1.70 x 1.26										
90	90 Watt					6.34 x 2.40 x 1.42										
96	96 Watt					8.66 x 2.68 x 1.53										
120	120 Watt					8.66 x 2.68 x 1.53										
150	150 Watt					8.97 x 2.68 x 1.58										
185	185 Watt					8.97 x 2.68 x 1.58										
240	240 Watt					9.88 x 2.68 x 1.58										
320	320 Watt					9.92 x 3.54 x 1.72										
480	480 Watt					10.32 x 4.92 x 1.72										
600	600 Watt					11.02 X 5.67 X 1.91										
FPD Dimming min 1% (Forward Phase)		+	20	20 Watt	IP67	Outdoor	120V	24V	4.92 x 2.20 x 0.79							
			40	40 Watt					4.92 x 2.20 x 0.79							
			60	60 Watt					4.92 x 2.20 x 0.79							
			75	75 Watt					4.92 x 2.20 x 0.79							
			96	96 Watt					4.92 x 2.20 x 0.79							
			20	20 Watt					IP14	Outdoor	+	120V	24V	5.60 x 2.00 x 2.14		
40	40 Watt	5.60 x 2.00 x 2.14														
60	60 Watt	6.62 x 2.58 x 2.33														
96	96 Watt	6.62 x 2.58 x 2.33														
150	150 Watt	9.80 x 3.00 x 2.74														
200	200 Watt	9.80 x 3.00 x 2.74														
300	300 Watt	10.07 x 4.20 x 3.50														



Bracket

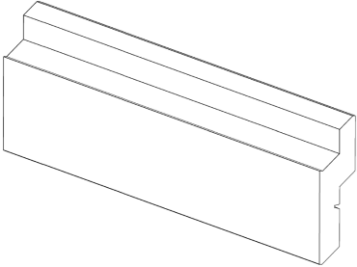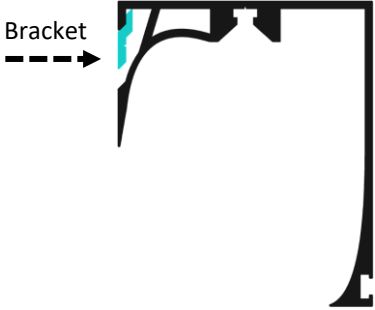 <p>RG02-BR Bracket</p>		
---	---	--

Mud-In Flange

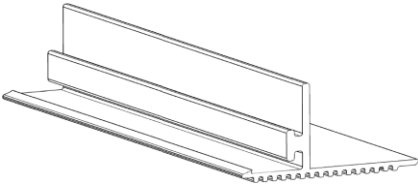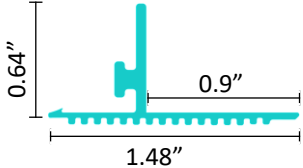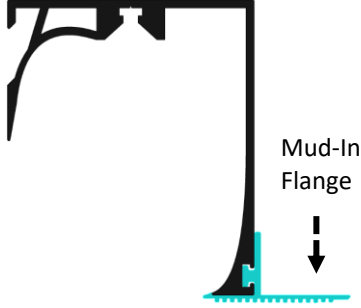 <p>RG02-MI Mud-In Flange</p>		
--	---	---


End Cap

 <p>RG02-EC End Cap</p>	
---	---


Linear Connector

 <p>RG02-LC Connector</p>


Installation: (W-SM) Wall Grazing / Surface Mount

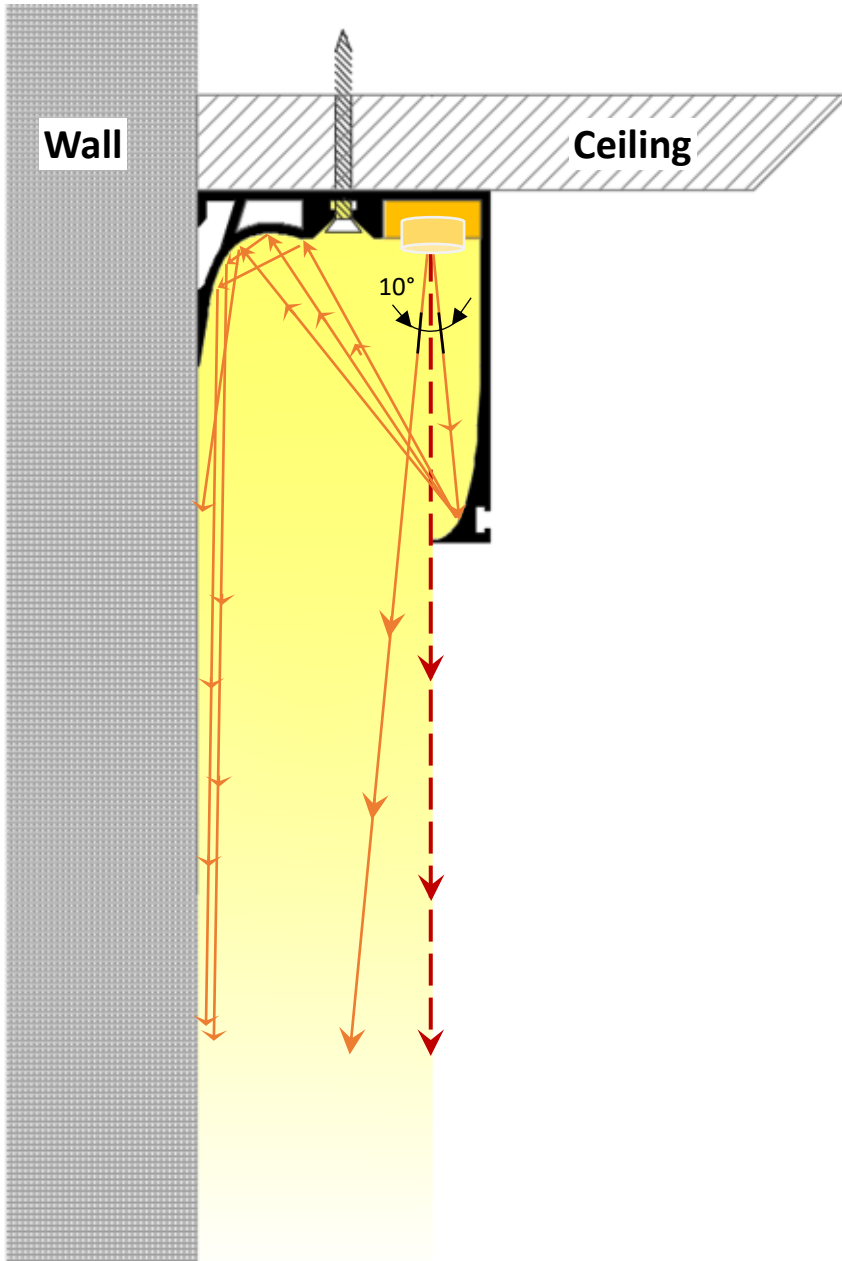


Installation: (W-RC) Wall Grazing / Regressed (Ceiling) with blocking

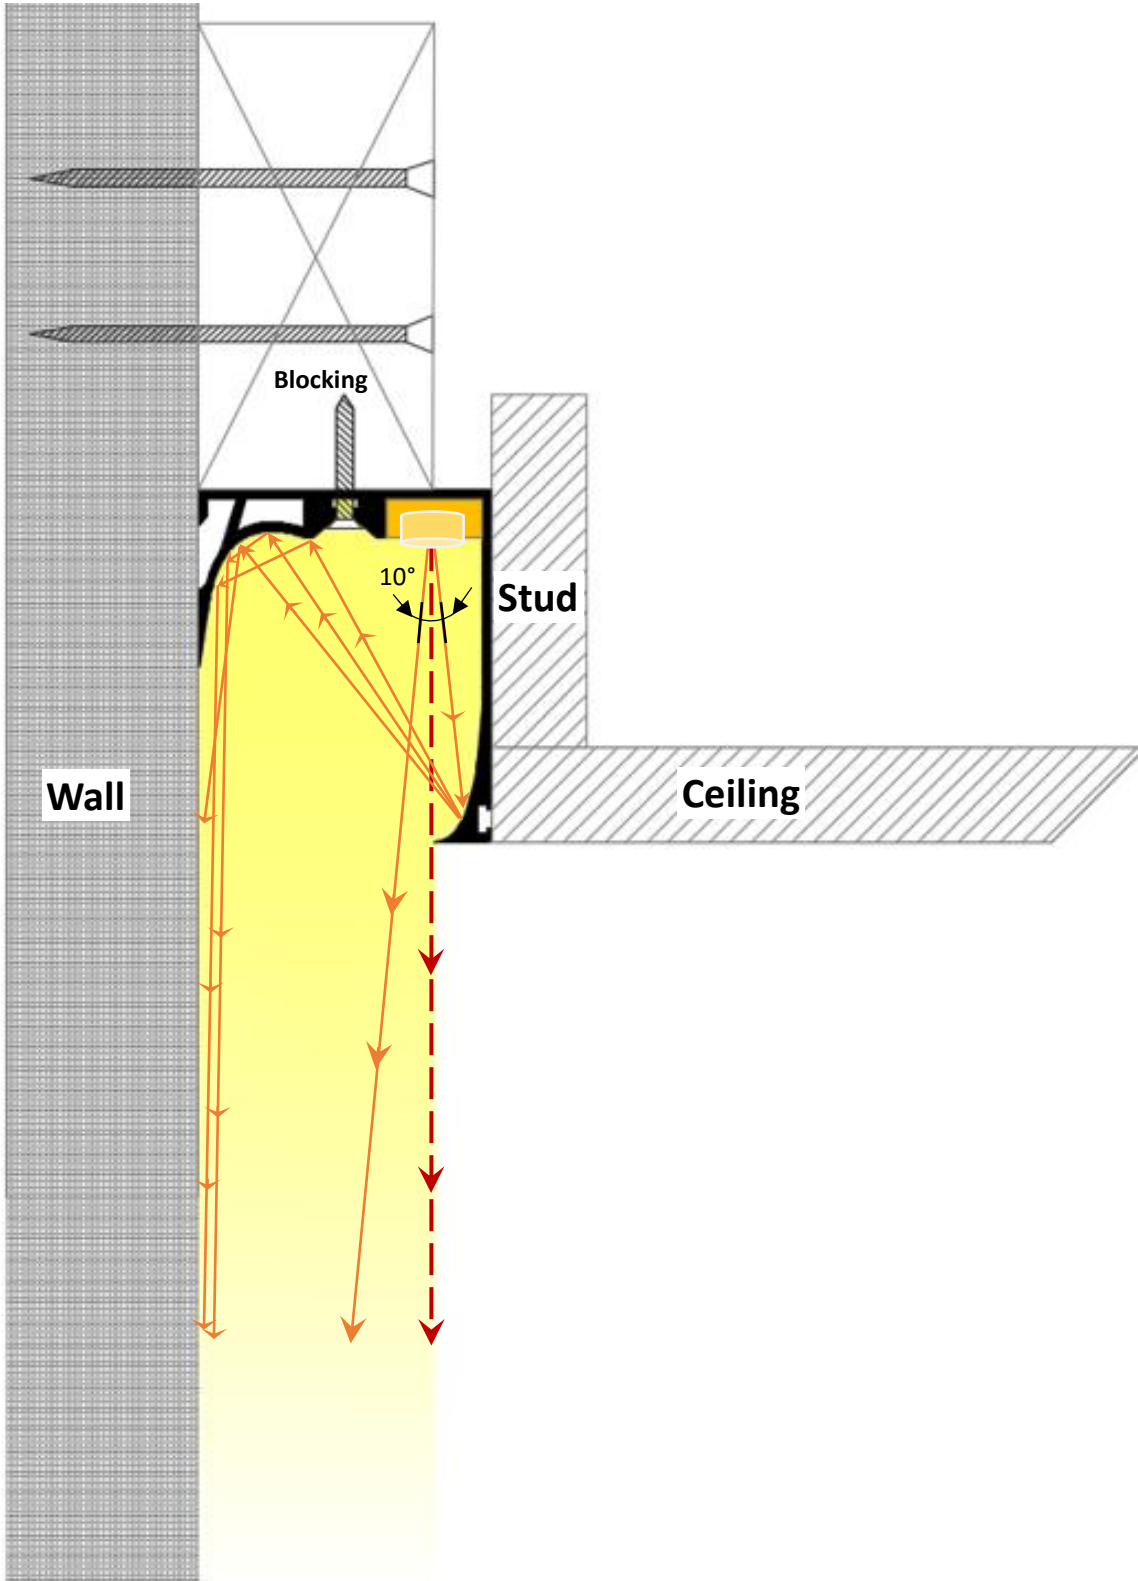


Installation: (W-RD) Wall Grazing / Regressed (Drywall) w/ blocking + mud-in flange

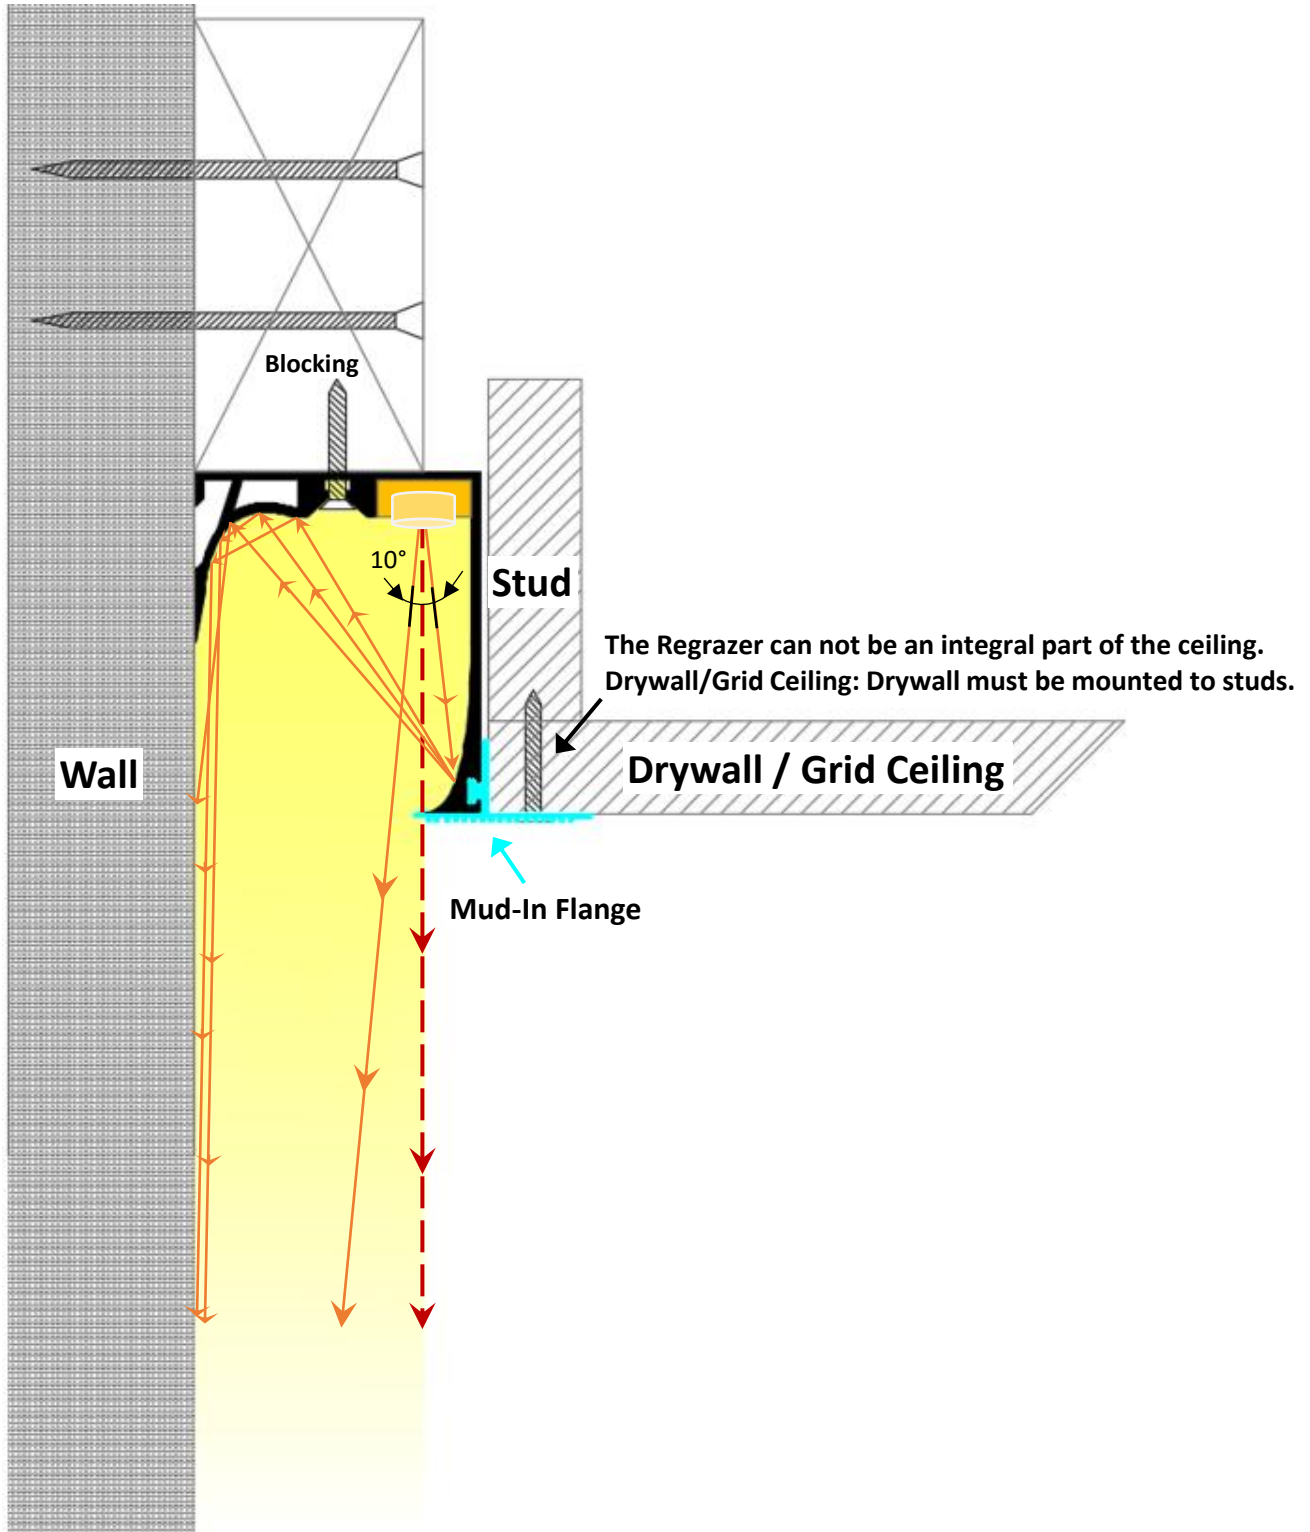


Installation: (W-WM) Wall Grazing / Wall Mount (regressed with bracket)

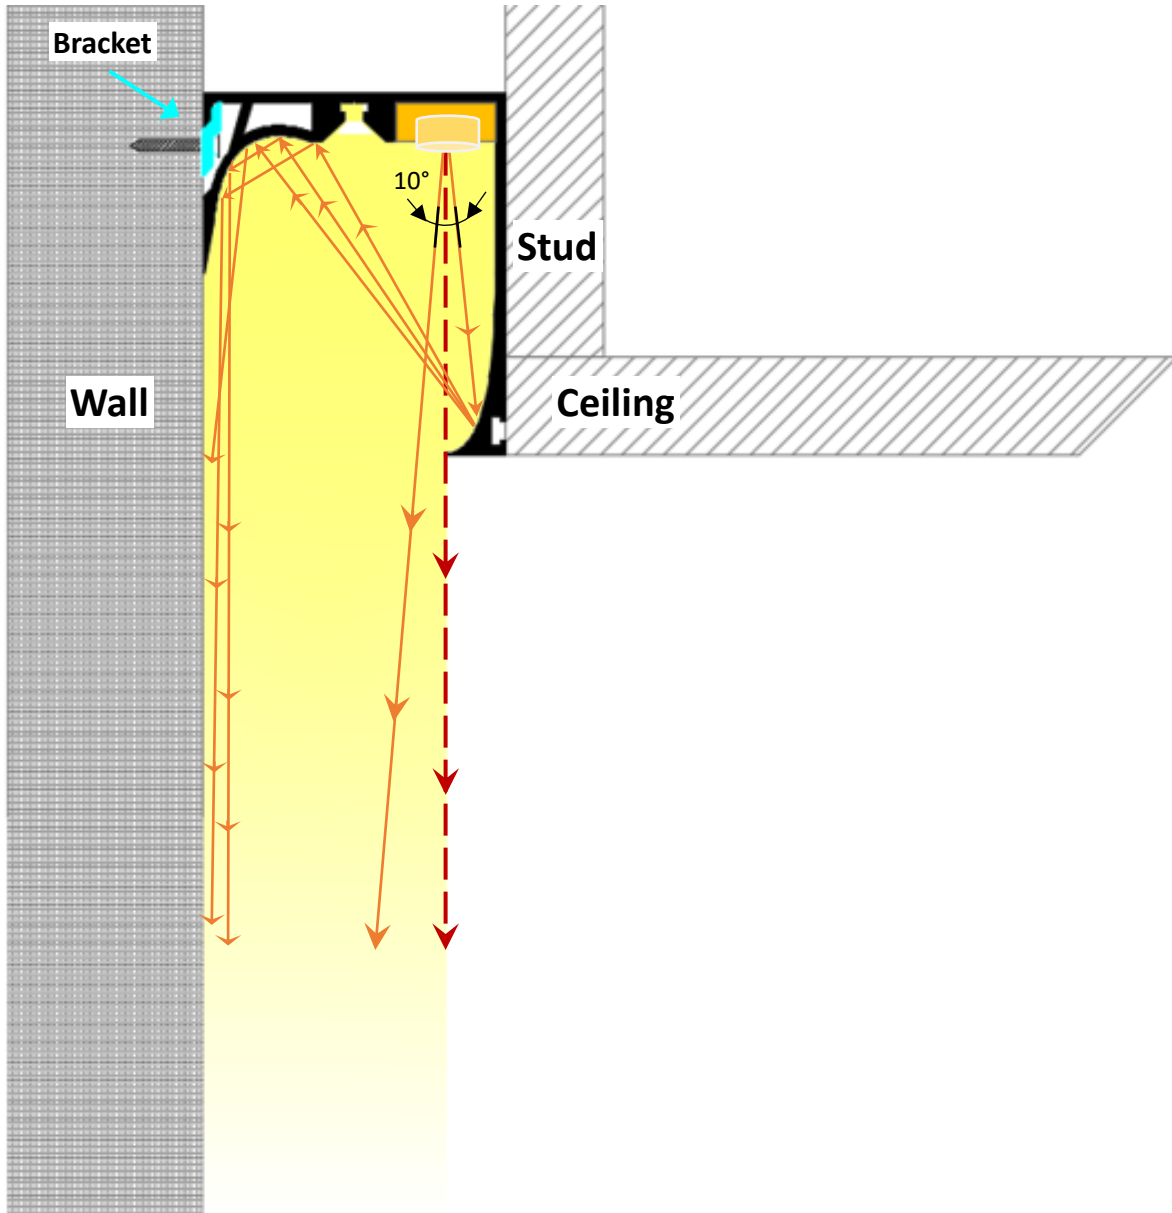


Installation: (W-WMD) Wall Grazing / Wall Mount (Drywall)
(regressed with bracket + mud-in flange)

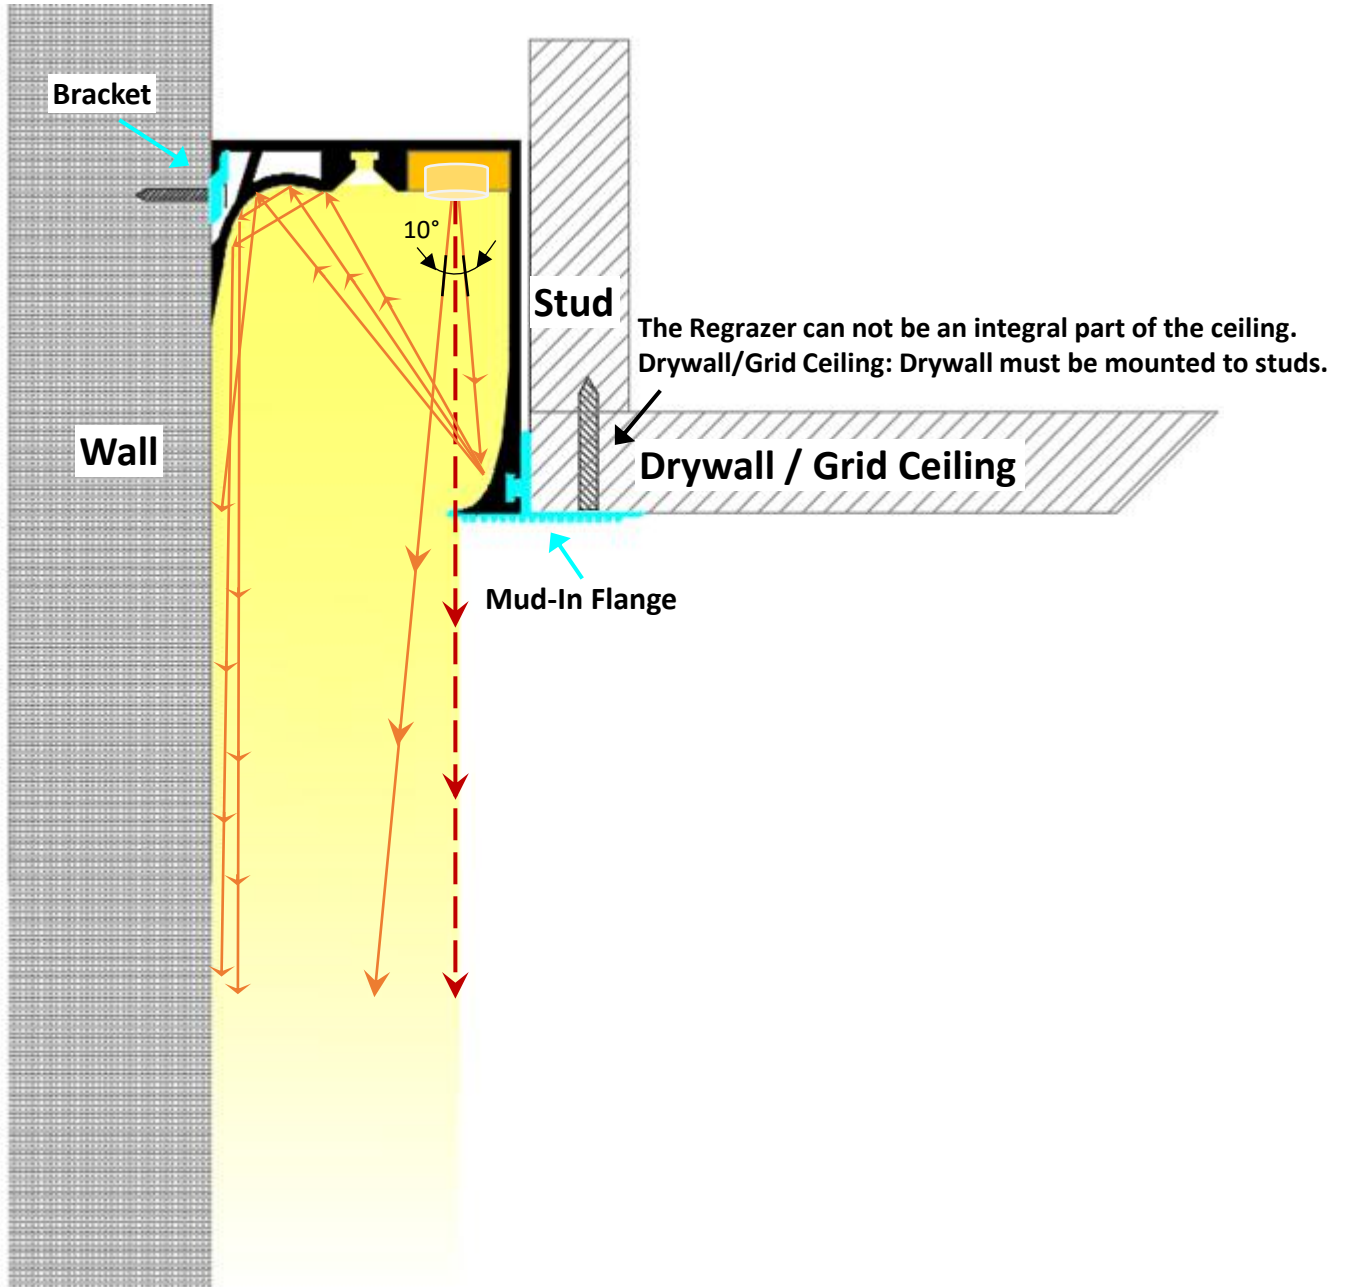

Installation: (W-IU) Wall Grazing / Inground Up (Indoor Only)

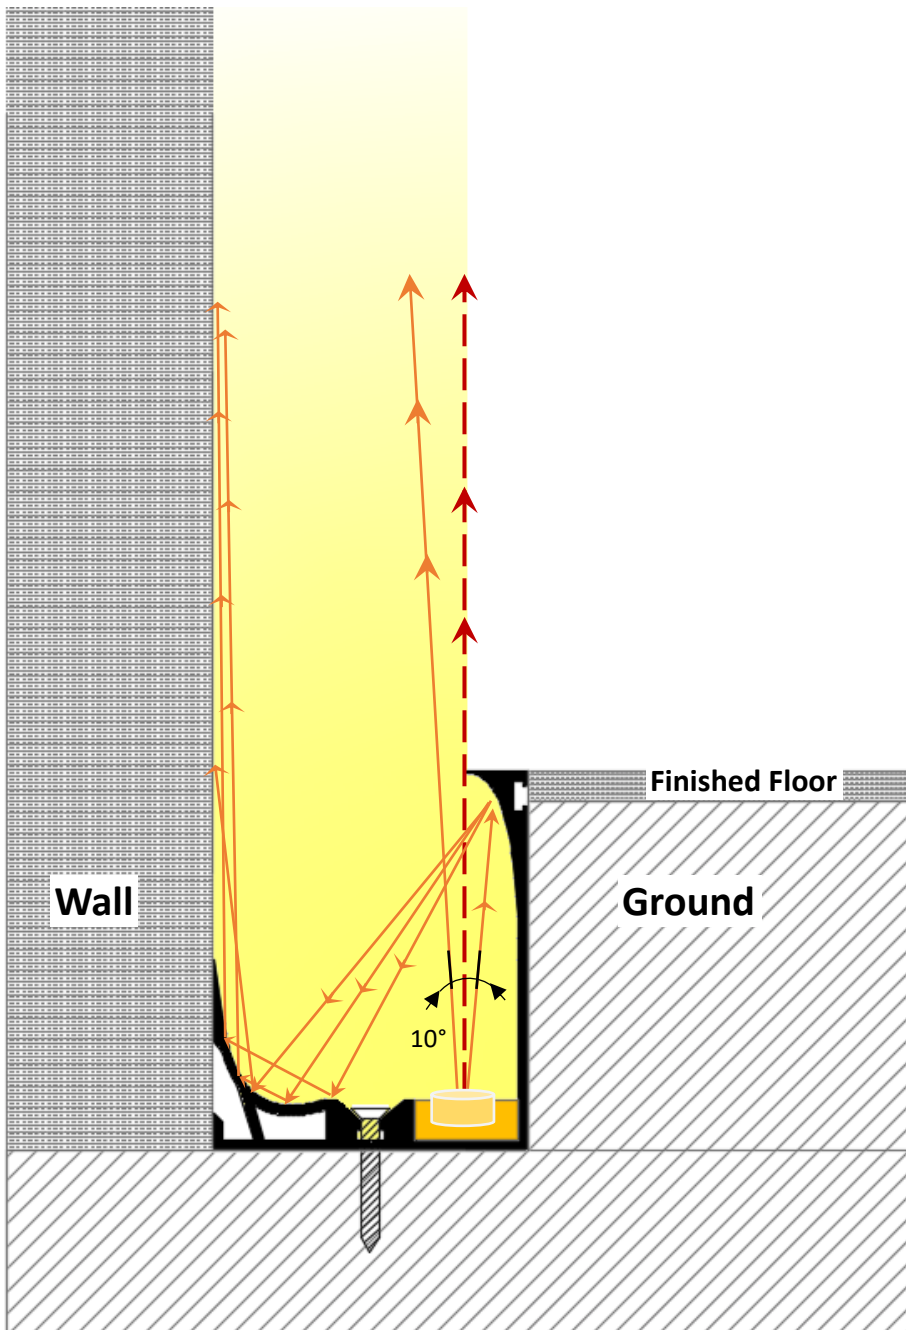

Installation: (C-WM) Ceiling Grazing / Wall Mount

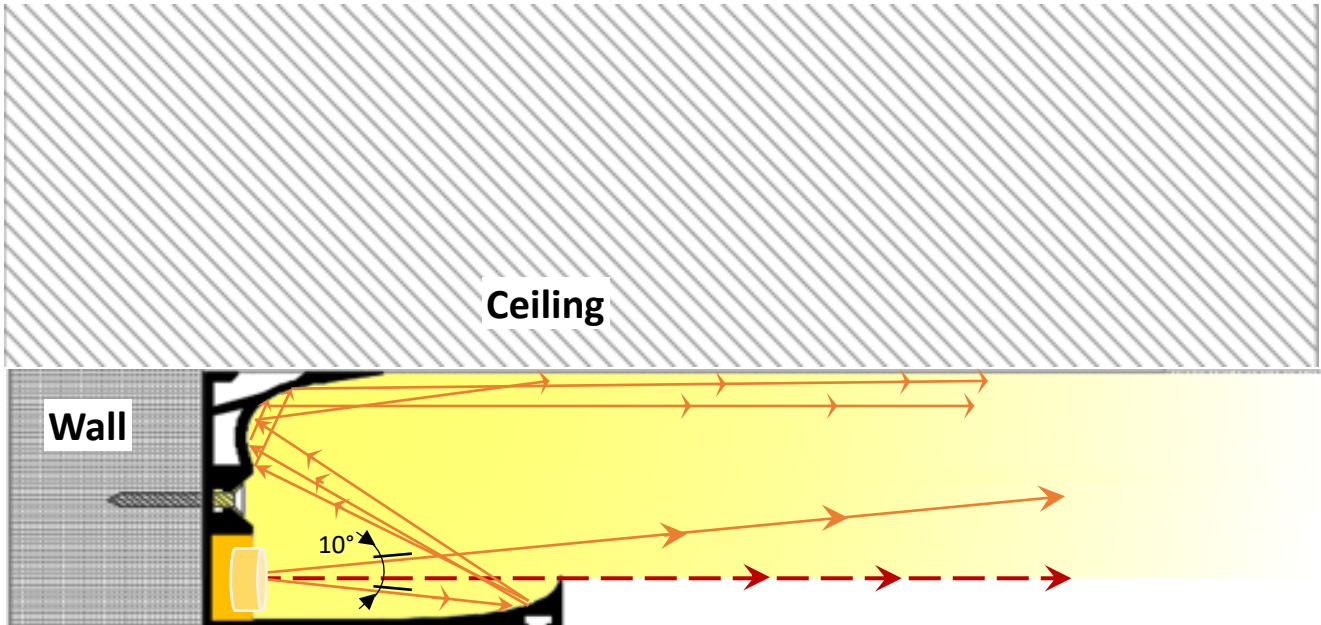

Installation: (G-GO) Ground Grazing / Ground Out

