



The JE04 stands out as a compact, 90° corner extrusion, constructed from high-quality anodized aluminum for superior heat dissipation. Ideal for low to medium output tape lights, this small yet versatile member of the JE series is particularly suited for angular installations, enhancing the ease of project specifications with its adaptability in various applications.

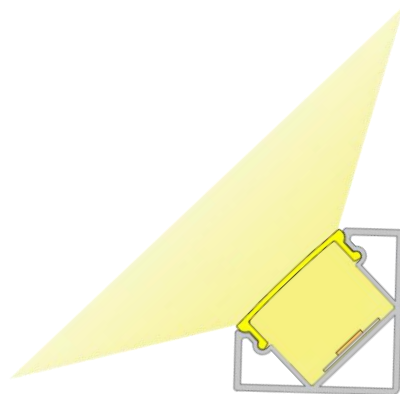

JE04-EC
End Cap



BL15-MCM
Mounting Clip



BL15-AA
Adj. Angle



Product Detail

Material:	Extruded Aluminum
Color:	Anodized Silver
Dimension (in):	L 78.74" x W 0.72" x H 0.72"
Customization:	Cut to specified length

Applications

- | | |
|--|--|
| <input type="checkbox"/> Surface Mount | <input type="checkbox"/> Narrow Spaces |
| <input type="checkbox"/> Perimeter | <input type="checkbox"/> Under Cabinet |
| <input type="checkbox"/> Cove | <input type="checkbox"/> Vanity |
| <input type="checkbox"/> 90° Corner | <input type="checkbox"/> Furniture |
| <input type="checkbox"/> Millwork | <input type="checkbox"/> Shelf |

Compatible LED Tapelight

Product	Output (lm/ft)	LEDs/ft	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	---------	--------------------	--------------------	-----	---------	------------	---------

Florence (Specification Grade)

L90	~ 90	36	~ 0.73	~ 123	>90	24V	75'	1.97"
L200	~ 200	36	~ 1.46	~ 140	>90	24V	49'	1.97"
L360	~ 360	36	~ 3.12	~ 117	>90	24V	42'	1.97"
L500	~ 500	36	~ 4.39	~ 135	>90	24V	36'	1.97"
RGB-3535	~ 170	36	~ 4.4	~ 39	N/A	24V	23'	1.97"
RGB-3838	~ 280	73	~ 5.0	~ 56	N/A	24V	16'	1.00"
RGB-5050	~ 230	29	~ 7.0	~ 23	N/A	24V	13'	2.46"
RGBW	~ 330	29	~ 7.3	~ 47	N/A	24V	13'	2.46"
TW1865	~ 60-850	73	~ 5.8	~ 10-146	>90	24V	16'	1.97"
TW2740	~ 210-430	73	~ 5.8	~ 36-74	>90	24V	16'	1.97"
Dim-To-Warm	~ 168	73	~ 4.4	~ 38	>90	24V	16'	1.97"

Athens (Economy)

L240	~ 240	36	~ 2.29	~ 115	>90	24V	39'	1.97"
L460	~ 460	36	~ 4.27	~ 115	>90	24V	26'	1.97"

Compatible SOB Tapelight

Product	Output (lm/ft)	IP Rating	Consump. (watt/ft)	Efficacy (lm/watt)	CRI	Voltage	Max Length	Min Cut
---------	----------------	-----------	--------------------	--------------------	-----	---------	------------	---------

Coblence H (High CRI)

L195	~ 195	IP20	~ 2.93	~ 80	>97	24V	49'	1.97"
L220	~ 220	IP67	~ 2.93	~ 80	>97	24V	65'	1.97"
L325	~ 325	IP67	~ 4.88	~ 70	>97	24V	32'	1.16"

Coblence S (Specification Grade)








L280	~ 280	IP20	~ 2.93	~ 100	>90	24V	49'	1.97"
L335	~ 335	IP67	~ 2.93	~ 120	>90	24V	65'	1.97"
L465	~ 465	IP67	~ 4.88	~ 100	>90	24V	32'	1.16"
RGBW	RGBW	IP67	~ 4.27	~ 50	N/A	24V	16'	2.19"

Ordering Code: JE04 + Tapelight + Accessories + Lengths

JE04	- SL	- F	- L200	IP00	CT35	- EC	- MCM	- 4'		
Extrusion	Lens	Tapelight				End Cap	Mounting	Length		
JE04	CL – Clear Lens	F – Florence	L090	~90 lm/ft	IP00	CT27	2700K	EC – End Cap	MCM – Mounting Clip	Enter run length
			L200	~200 lm/ft	IP66	CT30	3000K			
			L360	~360 lm/ft		CT35	3500K			
			L500	~500 lm/ft		CT40	4000K			
			RGB-3535	RGB	IP20	N/A				
			RGB-3838	RGB	IP54					
	RGB-5050	RGB	IP20	N/A						
			IP65							
	RGBW	RGBW	IP00	N/A						
			IP54							
			IP00	1800-6500K						
			IP65	2700-4000K						
		DTW	Dim-To-Warm	IP00	CT2130	2100-3000K				
		IP54								
	A – Athens	L240	~240 lm/ft	IP00	CT27	2700K				
L460		~460 lm/ft	IP66	CT30	3000K					
					CT35	3500K				
					CT40	4000K				
	CH – Coblence H	L195	~195 lm/ft	IP20	CT27	2700K				
L220		~220 lm/ft	IP67	CT30	3000K					
L235		~235 lm/ft	IP67	CT35	3500K					
					CT40	4000K				
	CS – Coblence S	L280	~280 lm/ft	IP20	CT27	2700K				
L335		~335 lm/ft	IP67	CT30	3000K					
L465		~465 lm/ft	IP67	CT35	3500K					
						CT40	4000K			
		RGBW	RGBW	IP67	N/A					

AA – Adj. Angle

Power Supply Ordering Codes

DTR		+	60		+	IP67		DTR60IP67 - Dimming, 60 Watt, IP67							
MODEL		+	POWER		+	IP RATING		INPUT	OUTPUT	DIMENSION					
NTR Non-Dimming [UL Recognized]			50	50 Watt		IP00 Indoor		88-264V	24V	3.90 x 3.82 x 1.42					
		75	75 Watt	5.08 x 3.82 x 1.50											
		100	100 Watt	6.26 x 3.82 x 1.50											
		150	150 Watt	7.84 x 3.85 x 1.50											
		200	200 Watt	8.46 x 4.53 x 1.18											
		320	320 Watt	8.46 x 4.53 x 1.18											
		750	750 Watt	9.84 x 5.00 x 1.61											
		960	960 Watt	11.60 x 5.00 x 1.61											
		12	12 Watt							IP42 Indoor		90-264V	24V	3.03 x 1.57 x 1.14	
		16	16 Watt											3.03 x 1.57 x 1.14	
	25	25 Watt	3.31 x 2.24 x 1.16												
	35	35 Watt	3.31 x 2.24 x 1.16												
	20	20 Watt		IP67 Outdoor		90-264V	24V	4.65 x 1.38 x 1.02							
	35	35 Watt						5.83 x 1.57 x 1.18							
	60	60 Watt						6.40 x 1.67 x 1.26							
	100	100 Watt						7.48 x 2.05 x 1.46							
	150	150 Watt						7.52 x 2.48 x 1.48							
	240	240 Watt						9.61 x 2.68 x 1.53							
	320	320 Watt						9.92 x 3.54 x 1.72							
DTR Dimming min 10% (0-10V) [UL Recognized]		16	16 Watt		IP30 Indoor		90-305V	24V	5.83 x 1.57 x 1.26						
		25	25 Watt							IP67 Outdoor	90-305V	24V	5.83 x 1.57 x 1.26		
		40	40 Watt										6.40 x 1.70 x 1.26		
		60	60 Watt										6.40 x 1.70 x 1.26		
		90	90 Watt										6.34 x 2.40 x 1.42		
		96	96 Watt										8.66 x 2.68 x 1.53		
		120	120 Watt										8.66 x 2.68 x 1.53		
		150	150 Watt										8.97 x 2.68 x 1.58		
		185	185 Watt										8.97 x 2.68 x 1.58		
		240	240 Watt										9.88 x 2.68 x 1.58		
	320	320 Watt	9.92 x 3.54 x 1.72												
	480	480 Watt	10.32 x 4.92 x 1.72												
	600	600 Watt	11.02 X 5.67 X 1.91												
FPD Dimming min 1% (Forward Phase) [UL Recognized]		20	20 Watt		IP67 Outdoor		120V	24V	4.92 x 2.20 x 0.79						
		40	40 Watt						4.92 x 2.20 x 0.79						
		60	60 Watt						4.92 x 2.20 x 0.79						
		75	75 Watt						4.92 x 2.20 x 0.79						
		96	96 Watt						4.92 x 2.20 x 0.79						
FPD Dimming min 1% (Forward Phase) with junction box [ETL Listed]		20	20 Watt		IP14 Outdoor		120V	24V	5.60 x 2.00 x 2.14						
		40	40 Watt						5.60 x 2.00 x 2.14						
		60	60 Watt						6.62 x 2.58 x 2.33						
		96	96 Watt						6.62 x 2.58 x 2.33						
		150	150 Watt						9.80 x 3.00 x 2.74						
		200	200 Watt						9.80 x 3.00 x 2.74						
	300	300 Watt	10.07 x 4.20 x 3.50												

CUSTOMIZATION	TL48	DC99	LN99	EX99	M99	C99	F48	F48C	IP68
Cutting tapelight to specified length + solder 4ft leadwire	✓						✓	✓	
Daisy Chain: Cut tapelight to specified length + 2", 6", or 12" jumper cable daisy chain between 2 run lengths		✓							
Installing tapelight onto extrusion							✓	✓	
Cutting diffuser to specified length			✓				✓	✓	
Cutting extrusion to specified length				✓			✓	✓	
Miter corner extrusion and diffuser					✓				
Filling extrusion with polyurethane (2 ft submersible)									✓
Customize extrusion to specified color						✓		✓	
Final function and quality inspection	✓	✓	✓	✓	✓	✓	✓	✓	✓